



# 家乐斯

HOUSEHOLD HARDWARE  
PRODUCT MANUAL

家居五金目录



# 目录



三节同步阻尼隐藏滑轨

09/30



三节普通阻尼隐藏滑轨

31/52



三节同步反弹隐藏滑轨

53/70



三节普通反弹隐藏滑轨

71/88

# Directory



三节美式阻尼隐藏滑轨

89/96



三节同步反弹+杆隐藏滑轨

97/104



二节普通阻尼隐藏滑轨


105/122



二节普通反弹隐藏滑轨

123/140


# SYNCHRONIZED CONCEALED DRAWER SLIDES

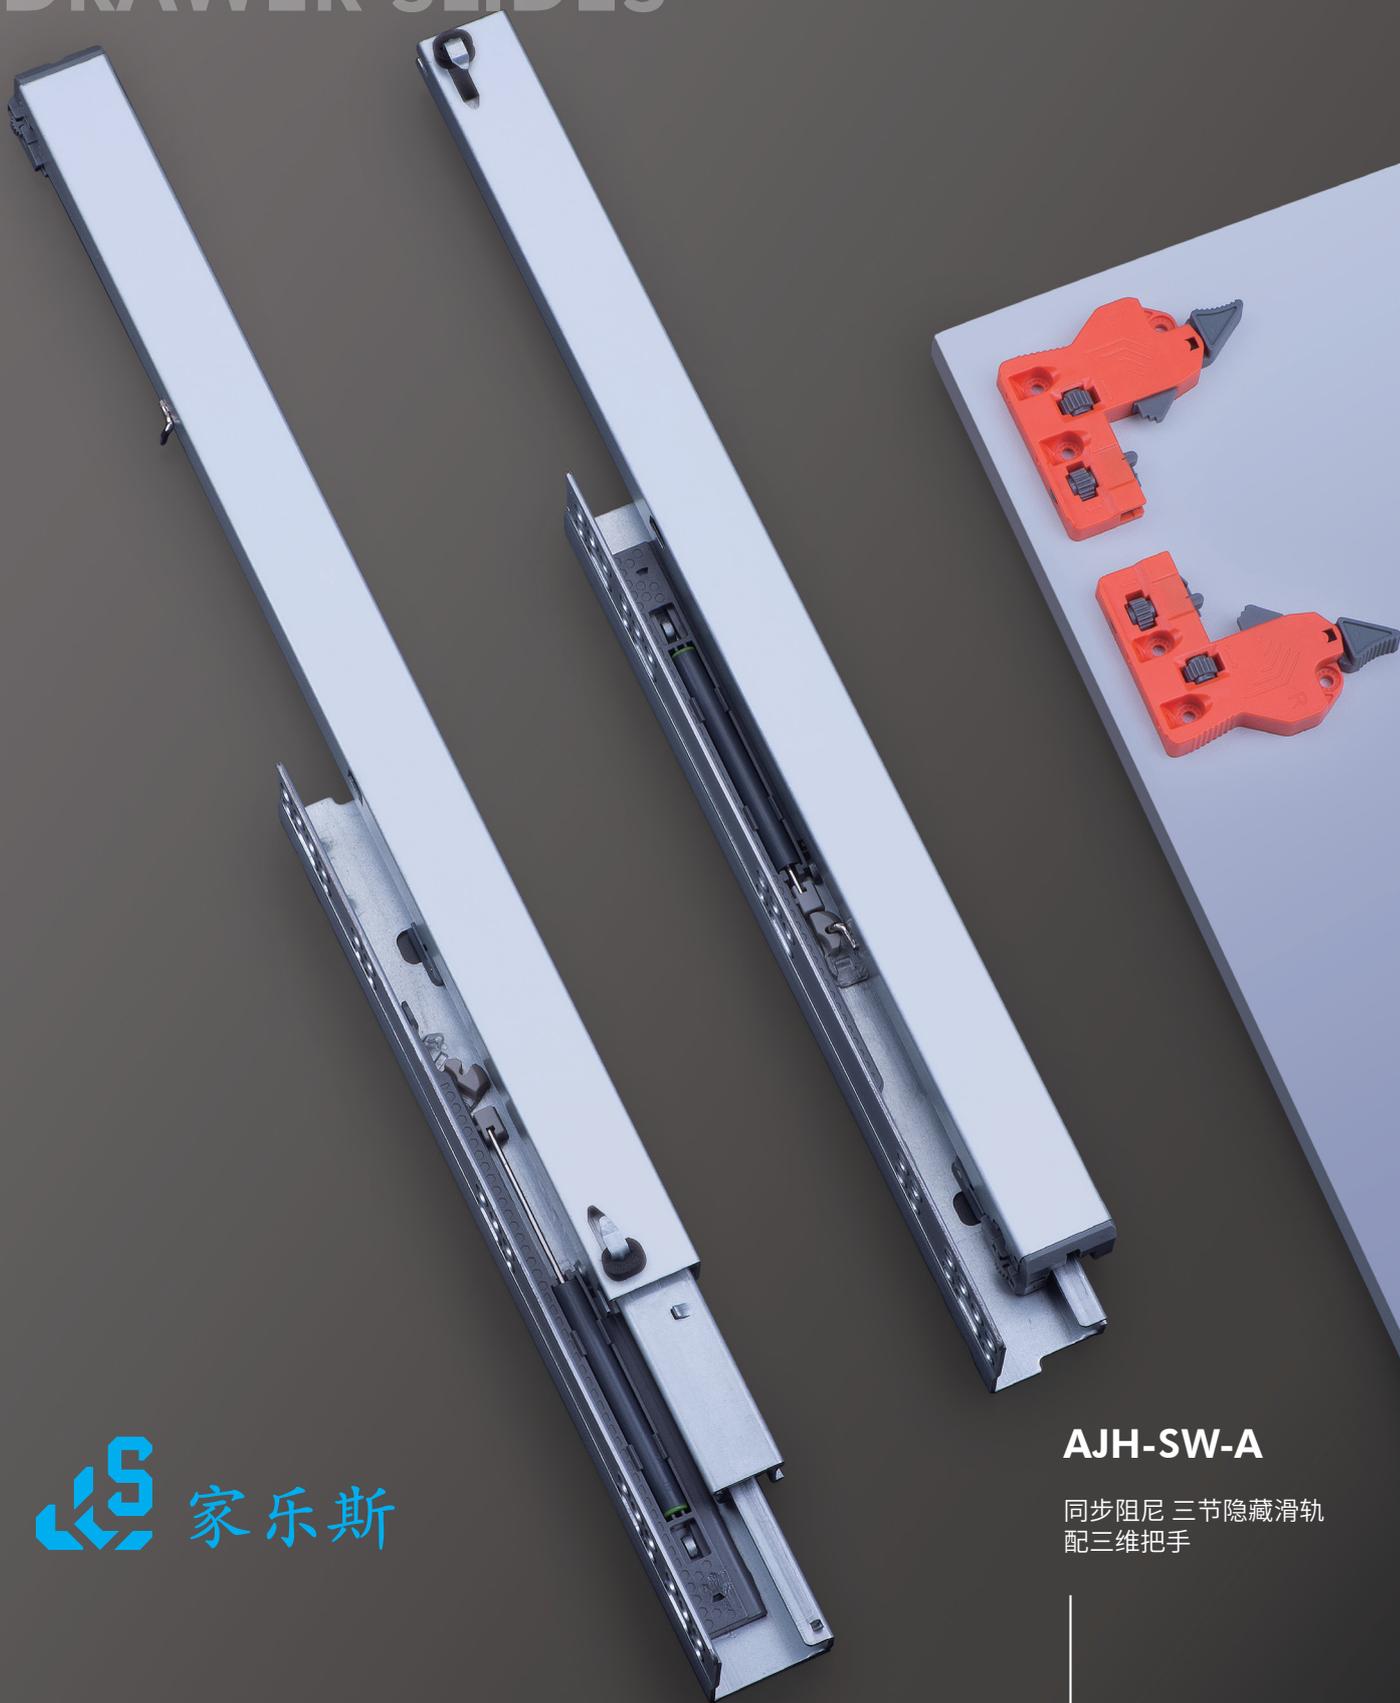

 家乐斯


**AJH-SW-A**

同步阻尼 三节隐藏滑轨  
配三维把手

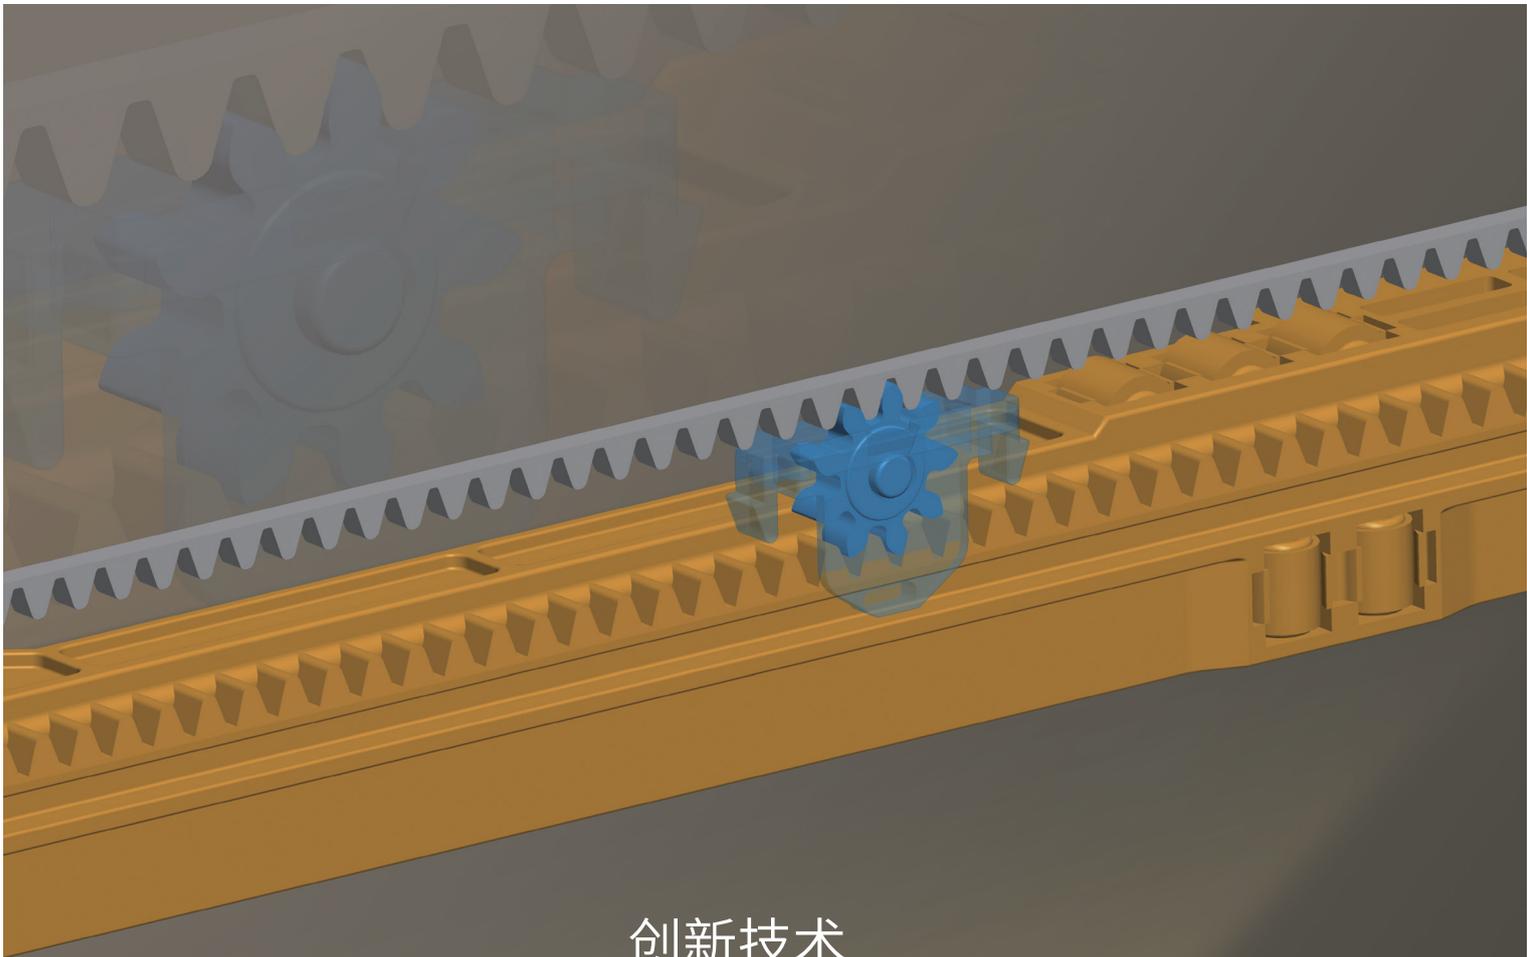


## 创新技术

- 精密齿轮与齿条合程同步吻合 -  
不跳齿不脱齿

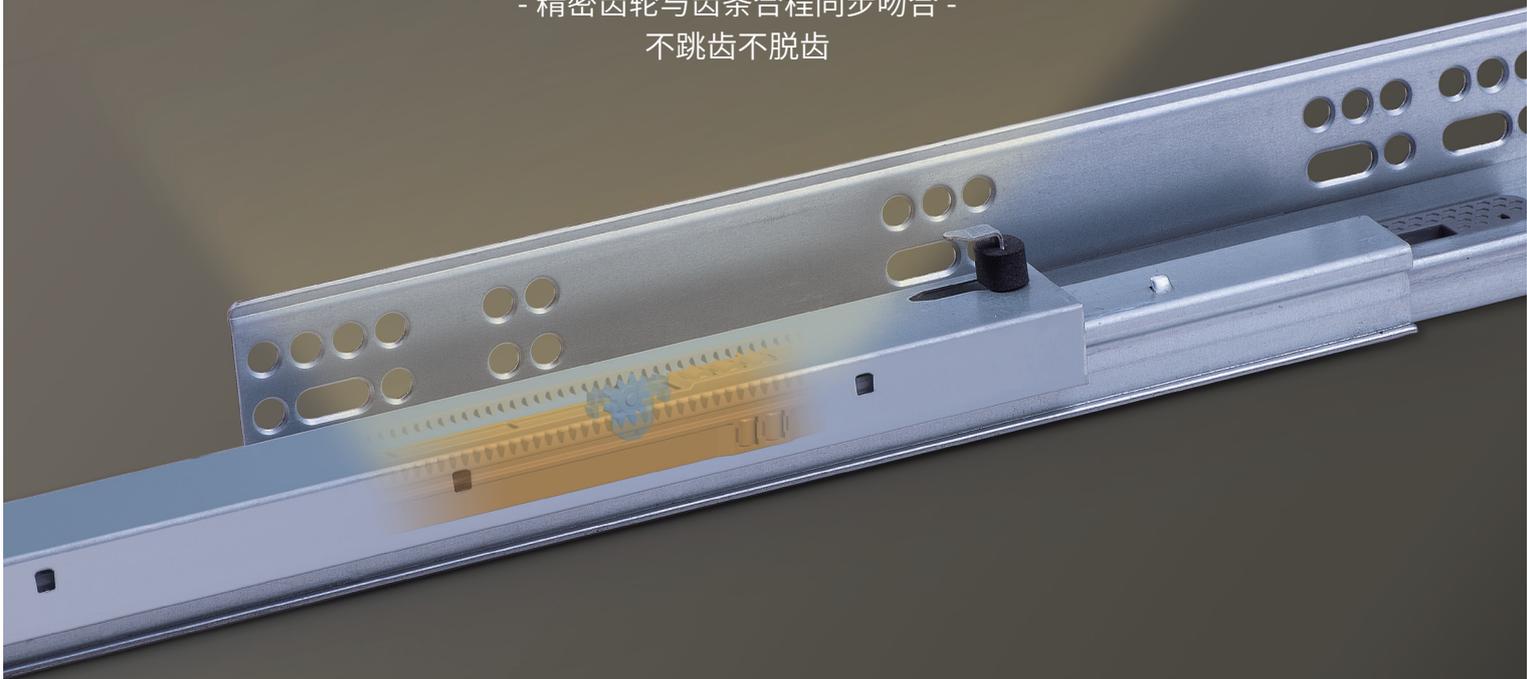

HOUSEHOLD HARDWARE  
CONCEALED DRAWER SLIDE

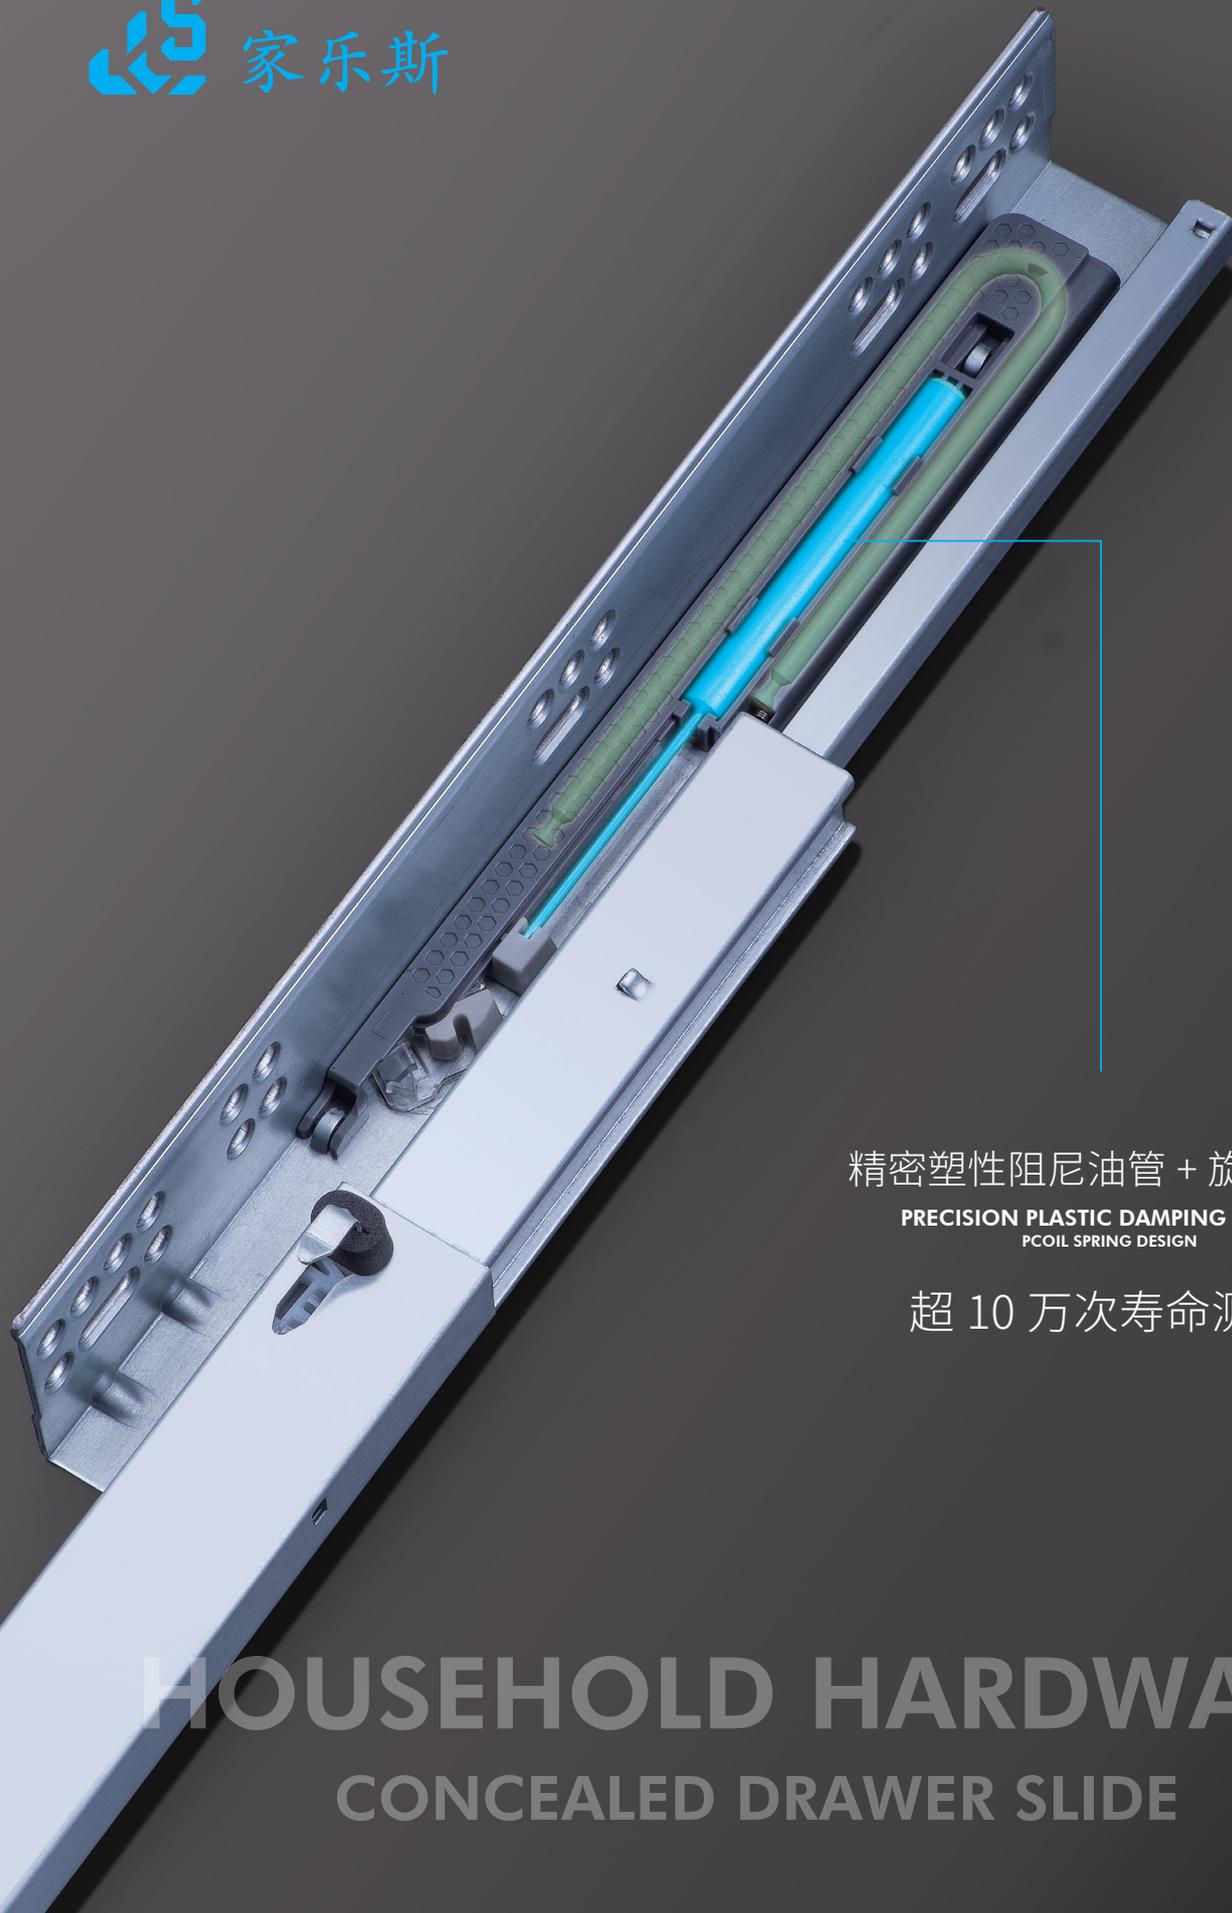

精密塑性阻尼油管 + 旋簧设计

PRECISION PLASTIC DAMPING TUBING  
PCOIL SPRING DESIGN

超 10 万次寿命测试

HOUSEHOLD HARDWARE  
CONCEALED DRAWER SLIDE

# HOUSEHOLD HARDWARE


## CONCEALED DRAWER SLIDE


增加海绵垫圈

让抽屉与滑轨紧密连接

**ANTI-COLLISION SPONGE**

Better protection of slide rails

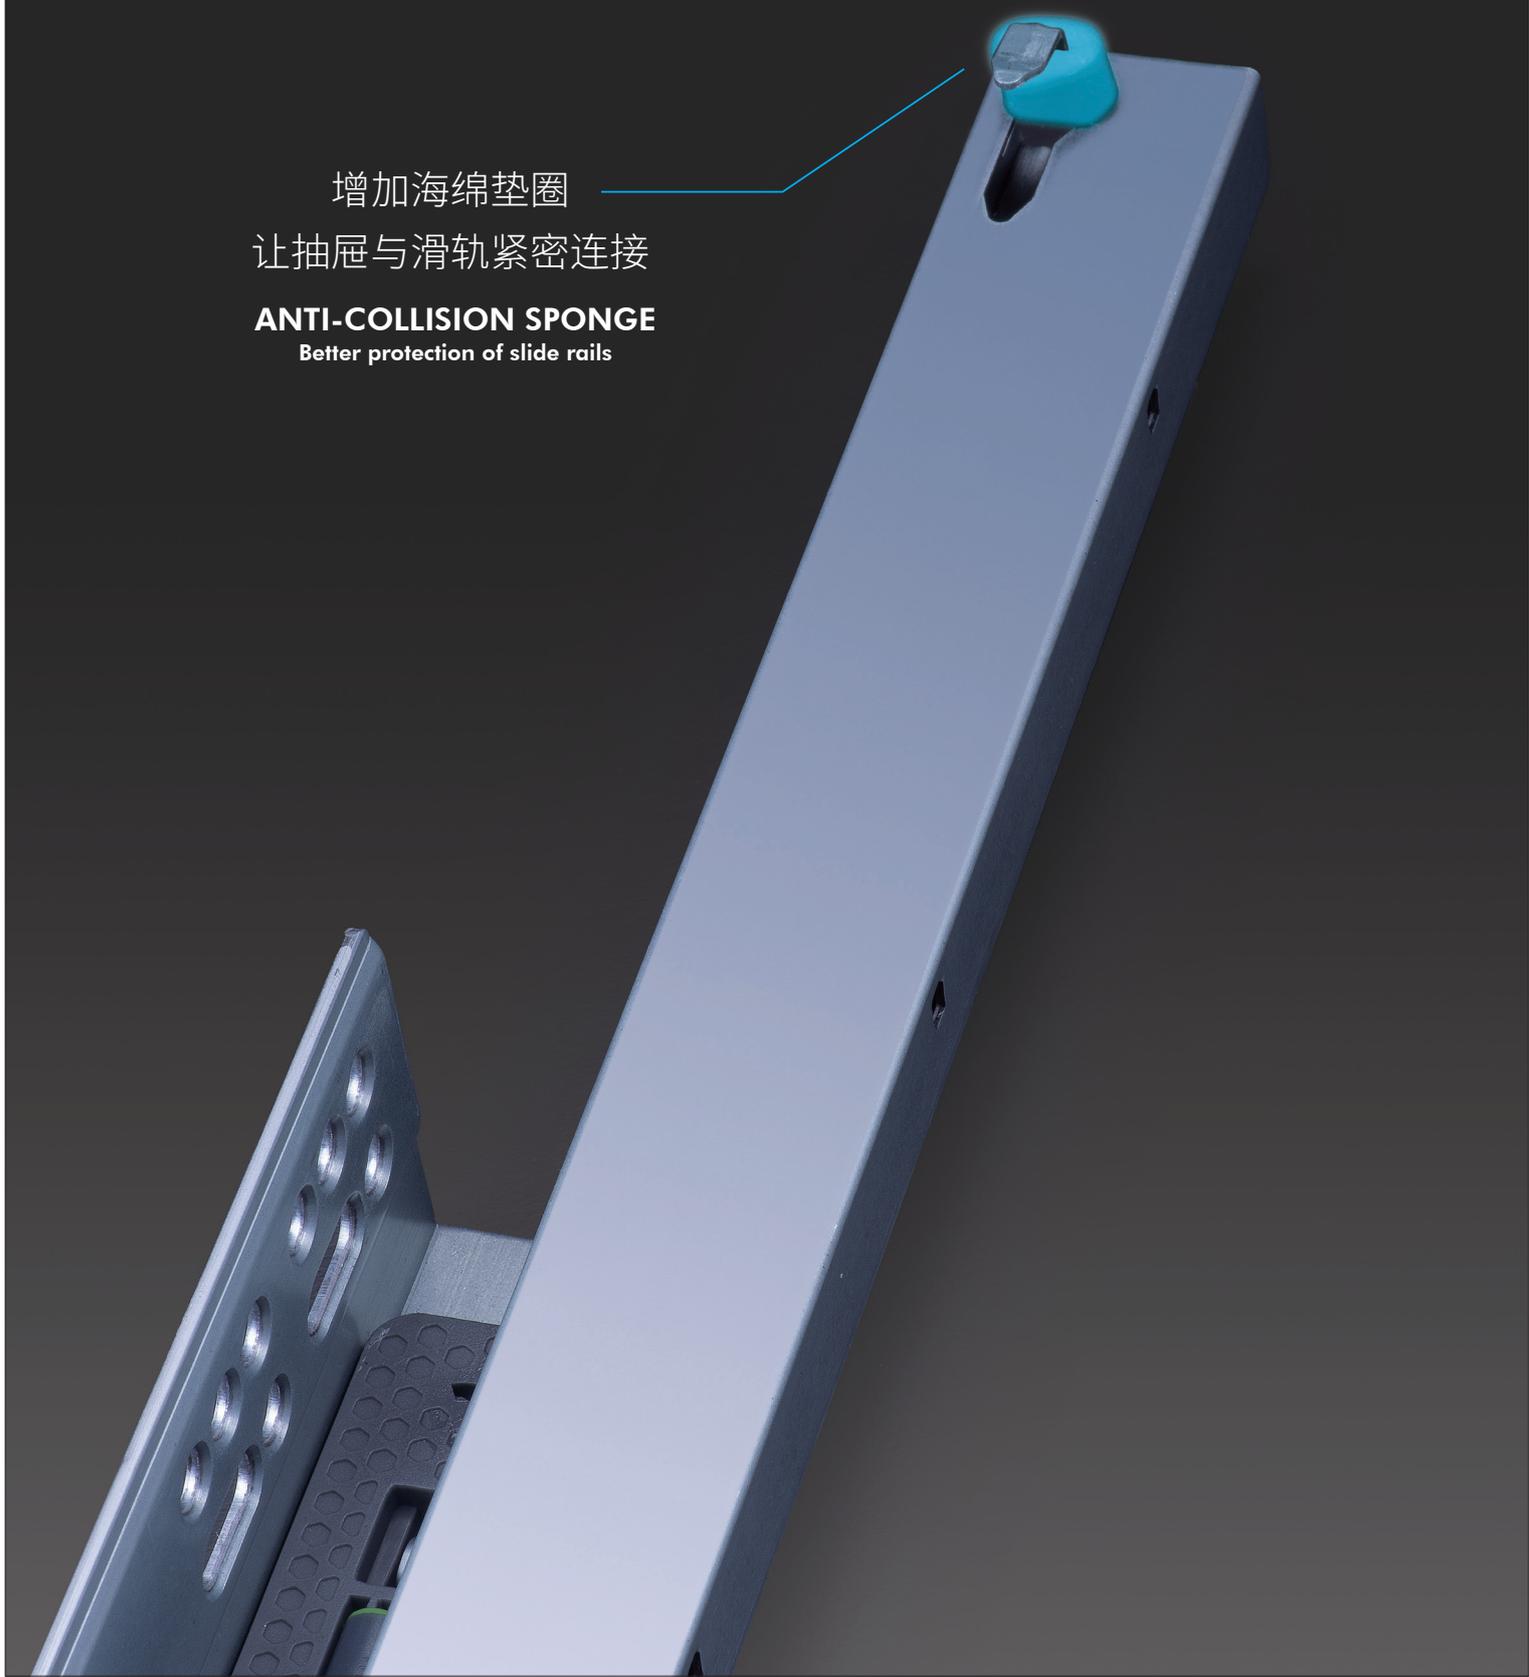

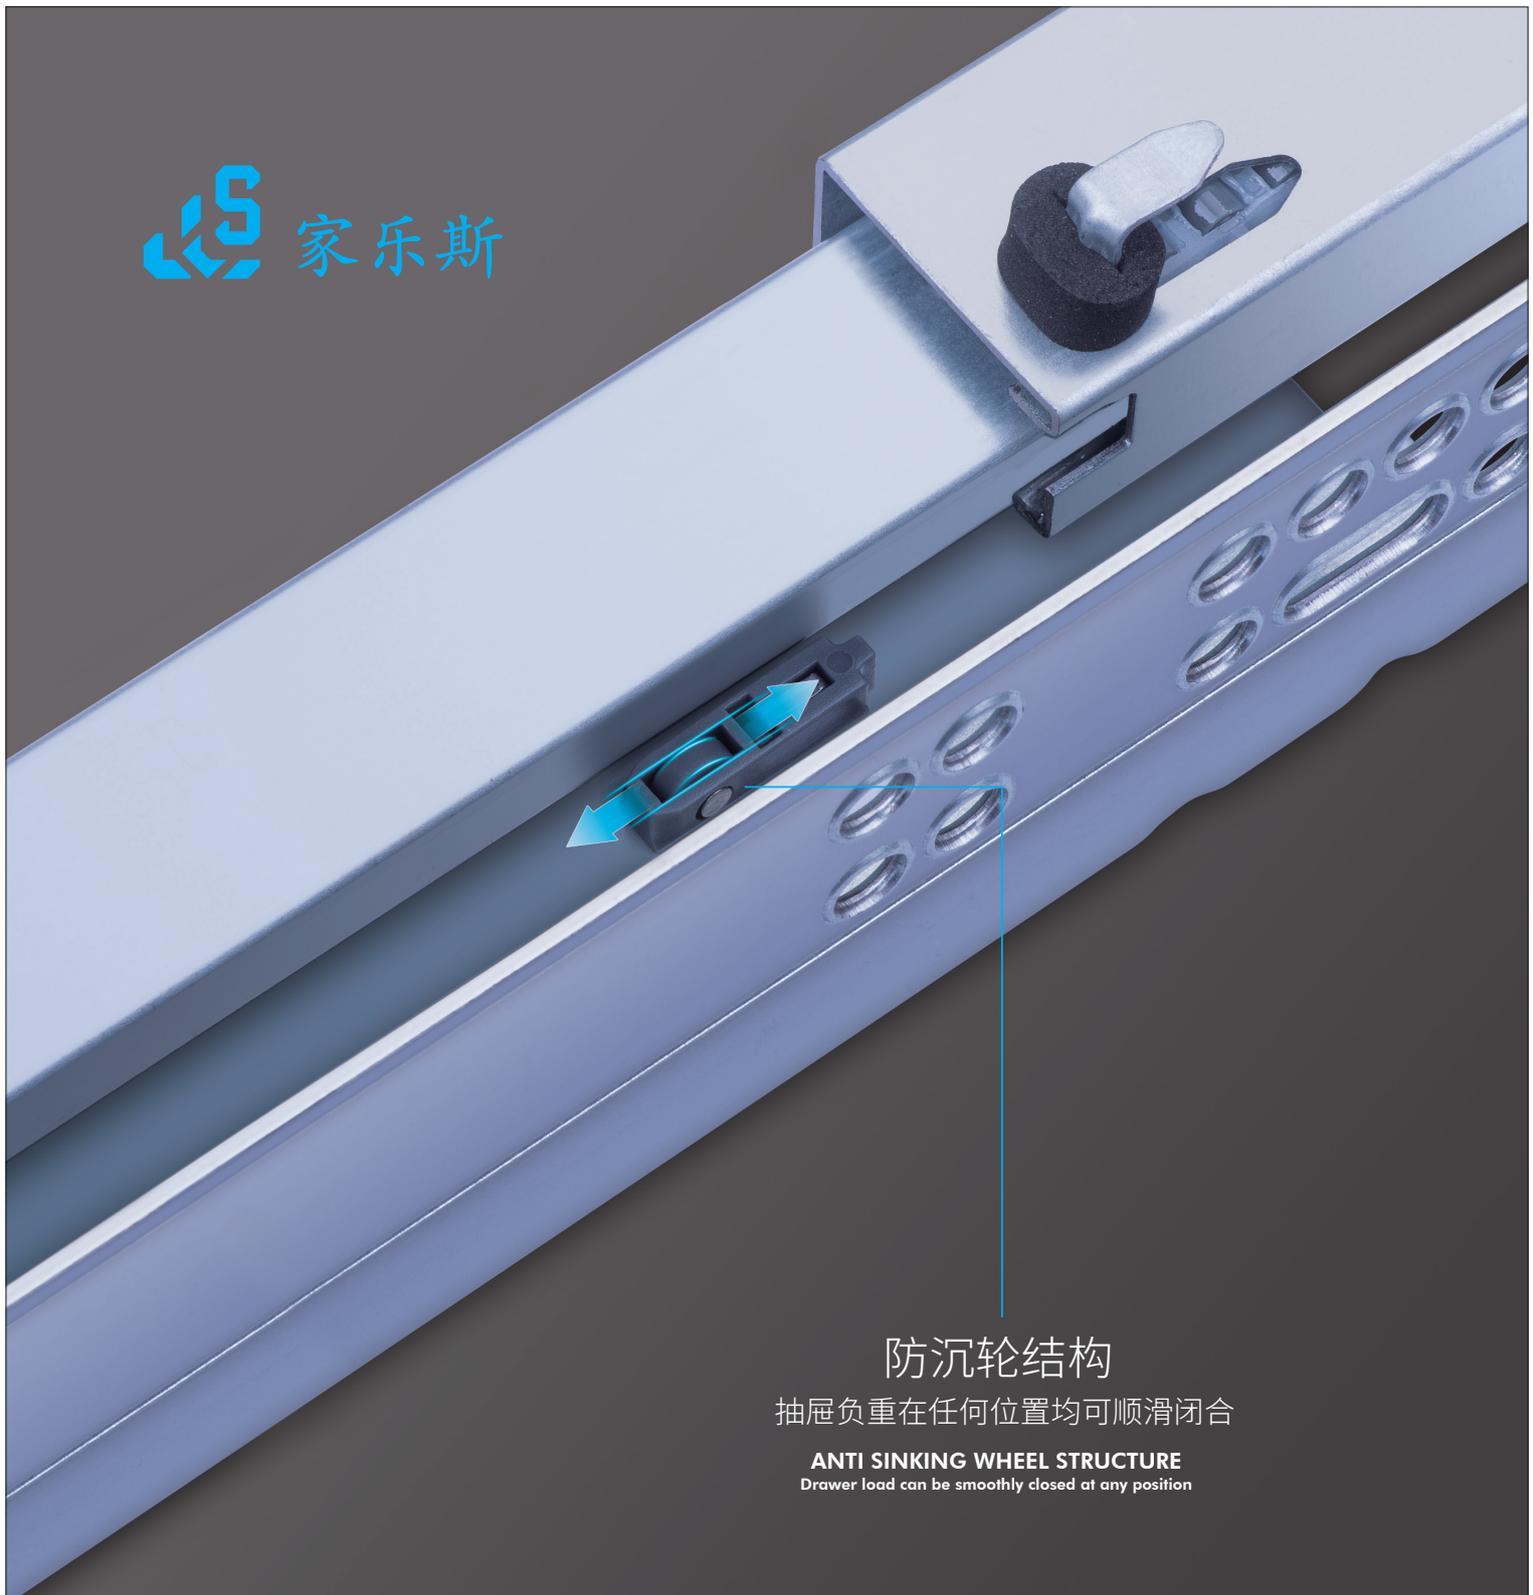


防沉轮结构

抽屉负重在任何位置均可顺滑闭合

**ANTI SINKING WHEEL STRUCTURE**  
Drawer load can be smoothly closed at any position

**HOUSEHOLD HARDWARE**  
**CONCEALED DRAWER SLIDE**

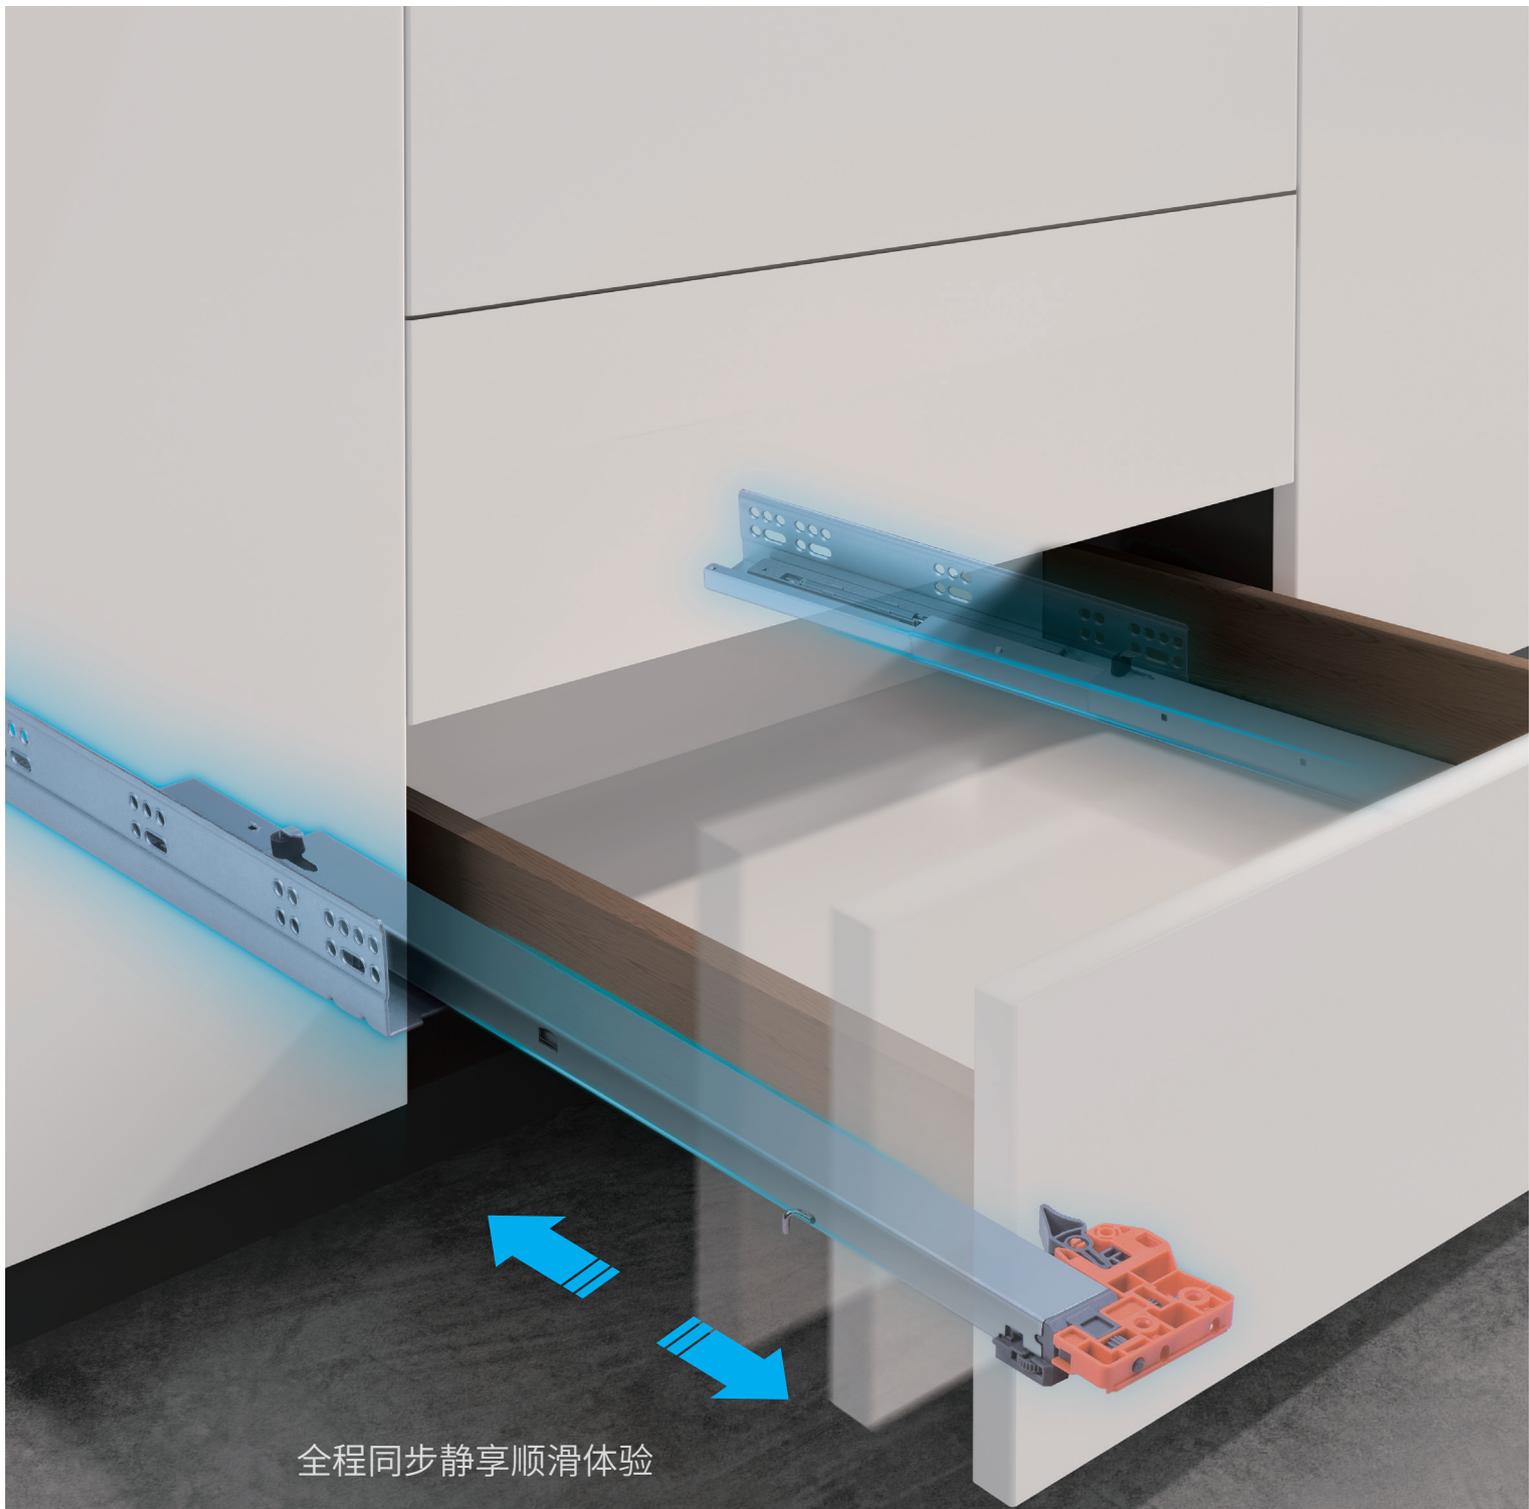

全程同步静享顺滑体验


FULL SYNCHRONIZATION  
AND SMOOTH EXPERIENCE

# FULL EXTENSION SYNCHRONIZED CONCEAL DRAWER SLIDES

## 三节同步阻尼隐藏滑轨




HOUSEHOLD HARDWARE  
PRODUCT MANUAL

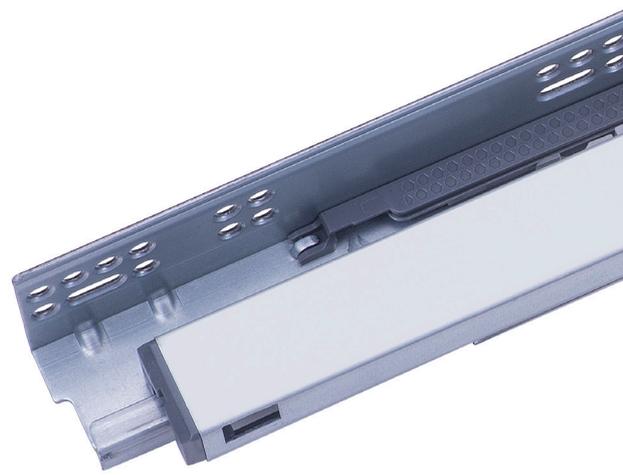

ED



配合金把手

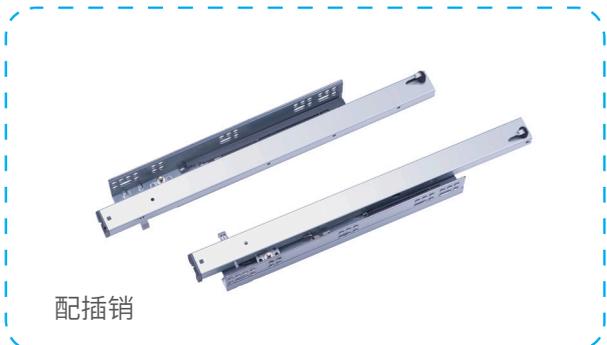

配插销



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

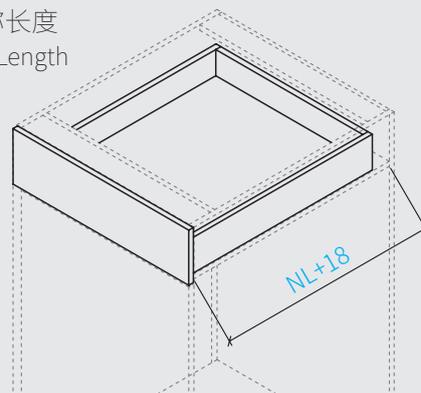

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步阻尼隐藏滑轨 (配二维把手) 左 / 右

FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
 (WITH 2D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	AJH - A (16) - 300	300 mm	AJH - A (19) - 300
350 mm	AJH - A (16) - 350	350 mm	AJH - A (19) - 350
400 mm	AJH - A (16) - 400	400 mm	AJH - A (19) - 400
450 mm	AJH - A (16) - 450	450 mm	AJH - A (19) - 450
500 mm	AJH - A (16) - 500	500 mm	AJH - A (19) - 500
550 mm	AJH - A (16) - 550	550 mm	AJH - A (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

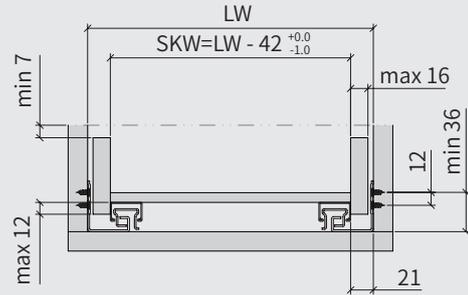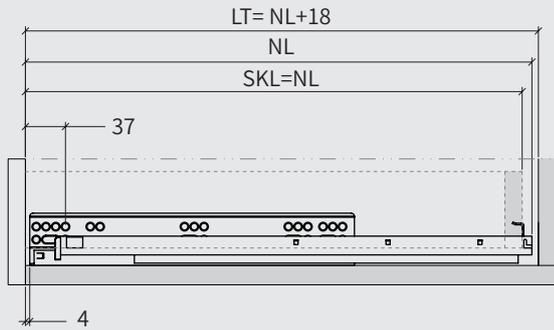

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

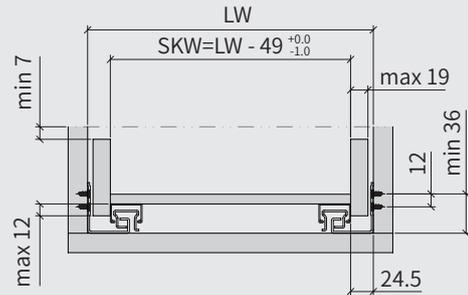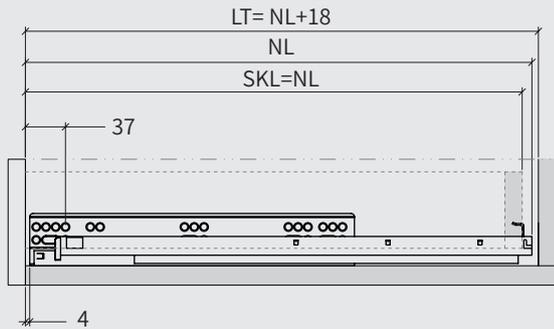

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

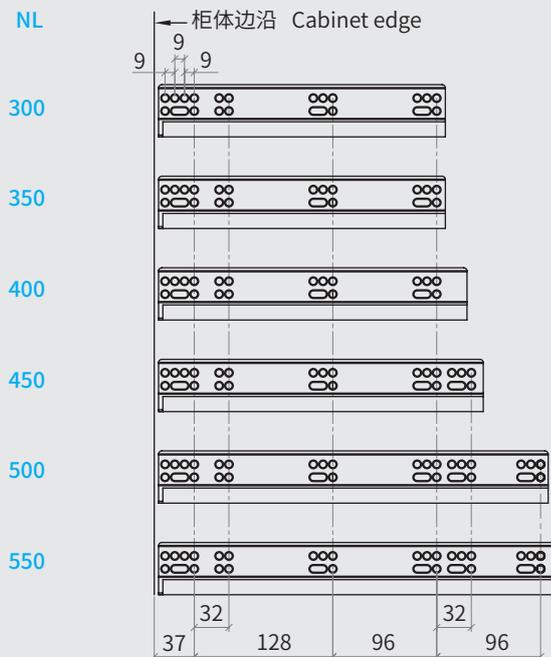

### 抽屉钻孔尺寸 (mm) drawer drill size

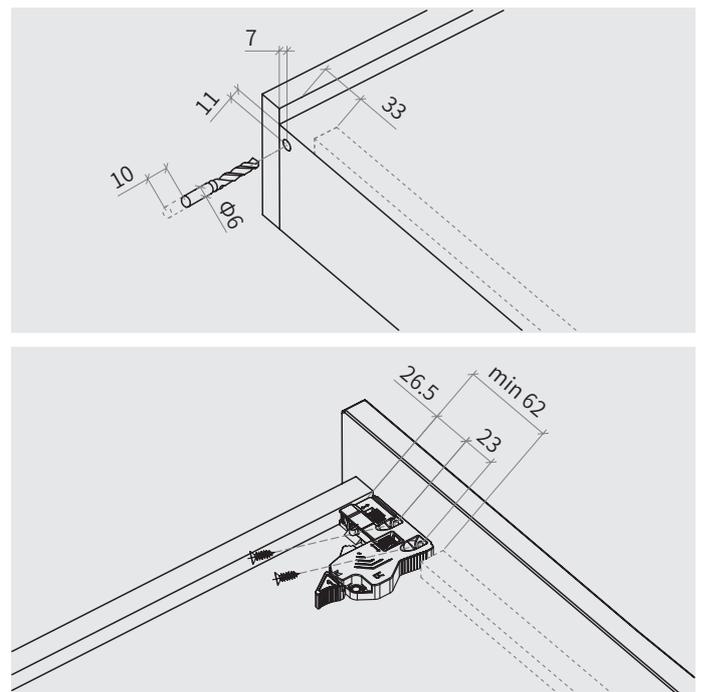

# MAJH-A

## 16mm & 19mm

系列三节同步阻尼隐藏滑轨配二维把手 (减尺)  
 FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
 WITH 2D HANDLE ( SHORTAGE SIZE)



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

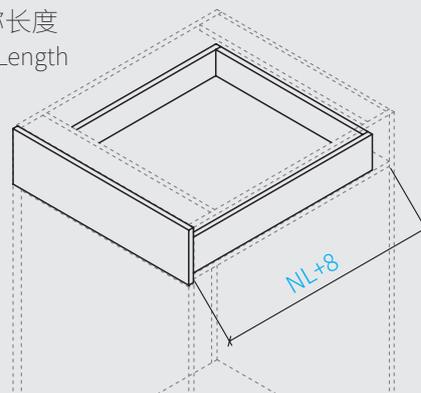

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步阻尼隐藏滑轨 (配二维把手) 左 / 右

FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
 (WITH 2D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	MAJH - A (16) - 300	300 mm	MAJH - A (19) - 300
350 mm	MAJH - A (16) - 350	350 mm	MAJH - A (19) - 350
400 mm	MAJH - A (16) - 400	400 mm	MAJH - A (19) - 400
450 mm	MAJH - A (16) - 450	450 mm	MAJH - A (19) - 450
500 mm	MAJH - A (16) - 500	500 mm	MAJH - A (19) - 500
550 mm	MAJH - A (16) - 550	550 mm	MAJH - A (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

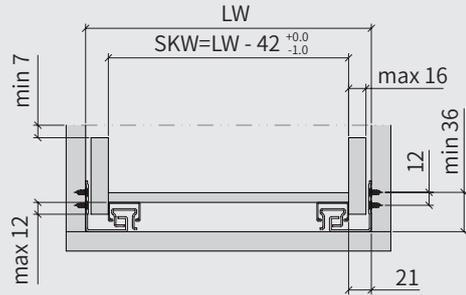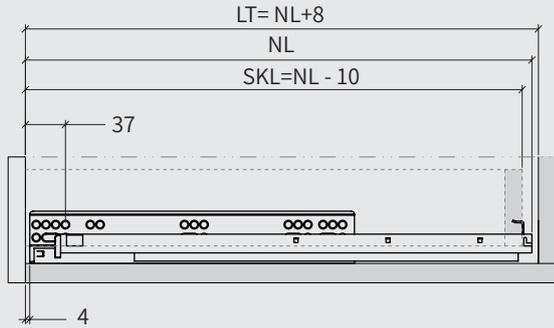

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

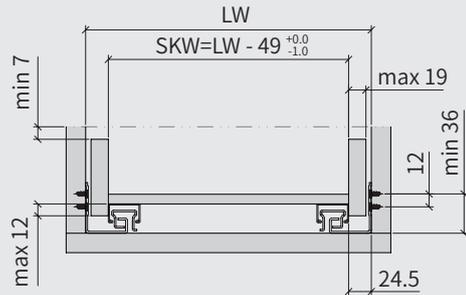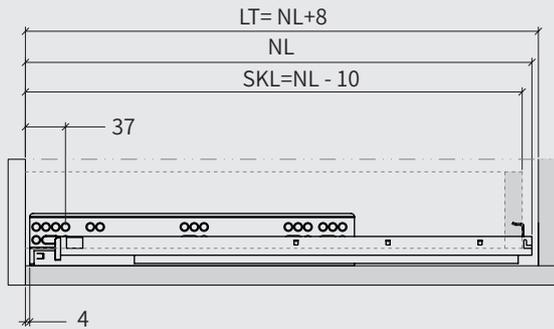

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

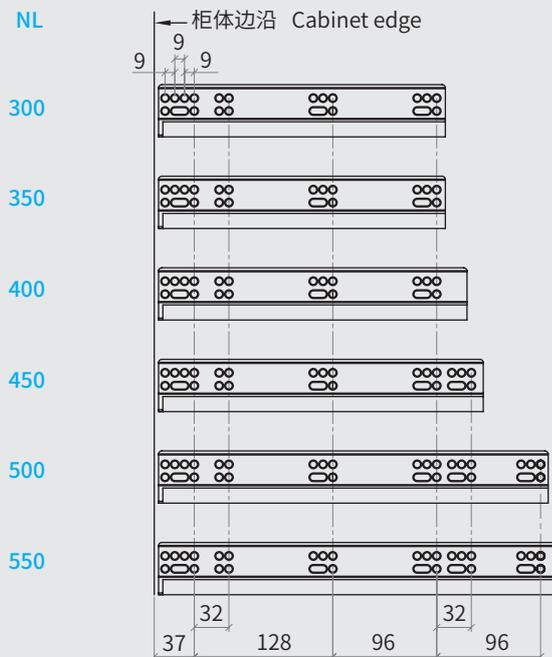

### 抽屉钻孔尺寸 (mm) drawer drill size

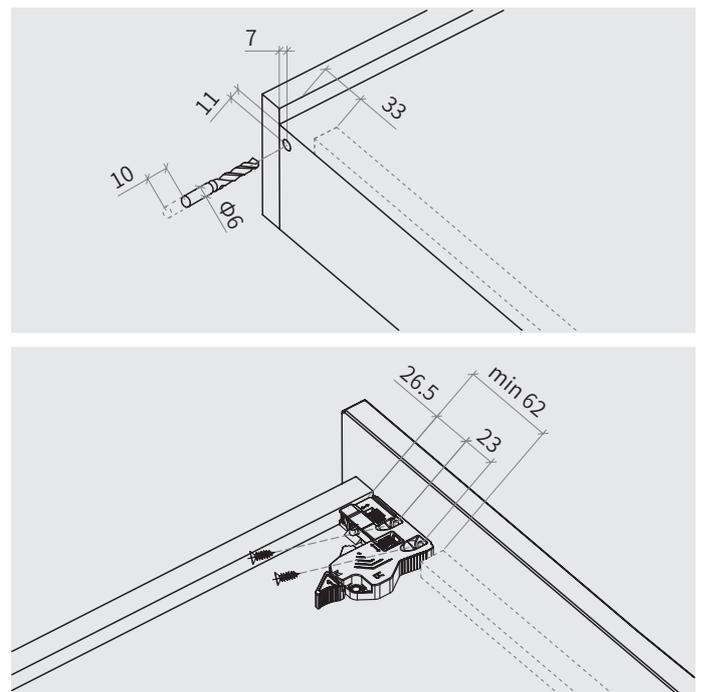

# AJH-B

## 16mm & 19mm

系列三节同步阻尼隐藏滑轨配一维把手 (足尺)  
 FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
 WITH 1D HANDLE ( FULL SIZE)



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

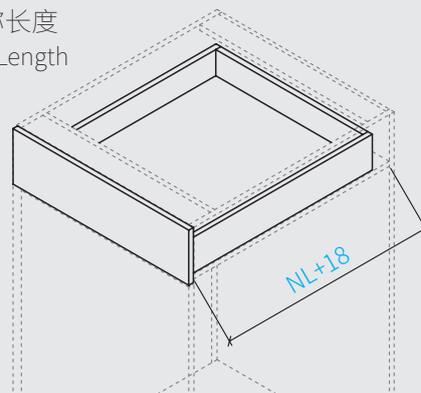

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步阻尼隐藏滑轨 (配一维把手) 左 / 右

FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
 ( WITH 1D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	AJH - B (16) - 300	300 mm	AJH - B (19) - 300
350 mm	AJH - B (16) - 350	350 mm	AJH - B (19) - 350
400 mm	AJH - B (16) - 400	400 mm	AJH - B (19) - 400
450 mm	AJH - B (16) - 450	450 mm	AJH - B (19) - 450
500 mm	AJH - B (16) - 500	500 mm	AJH - B (19) - 500
550 mm	AJH - B (16) - 550	550 mm	AJH - B (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

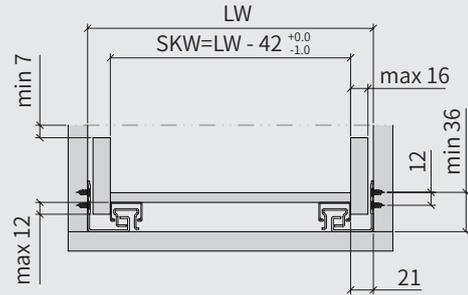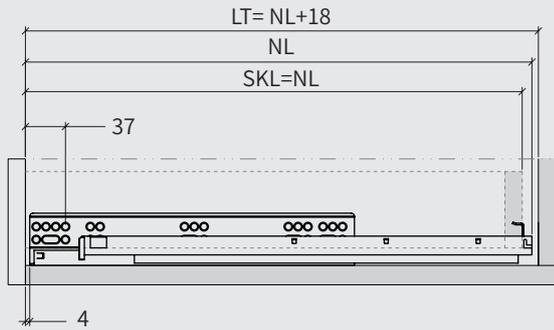

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

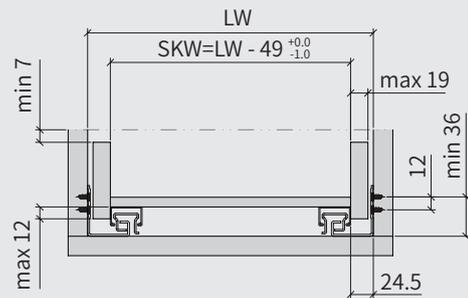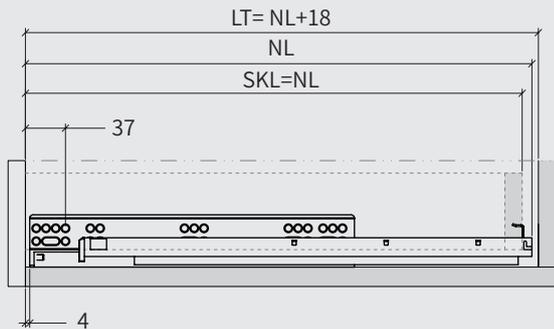

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

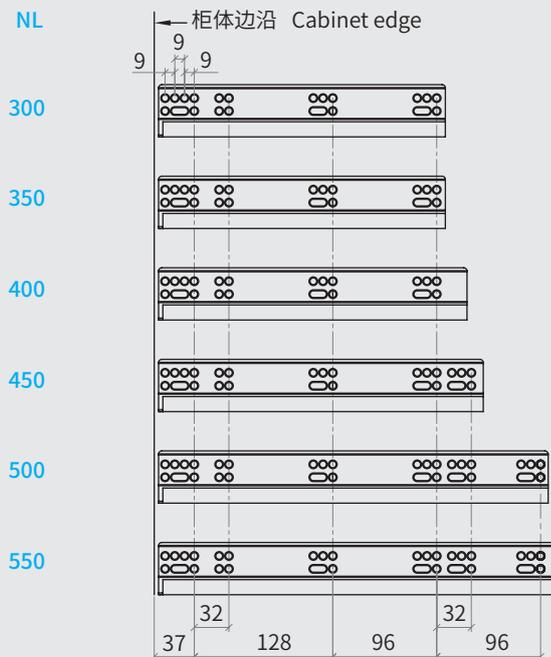

### 抽屉钻孔尺寸 (mm) drawer drill size

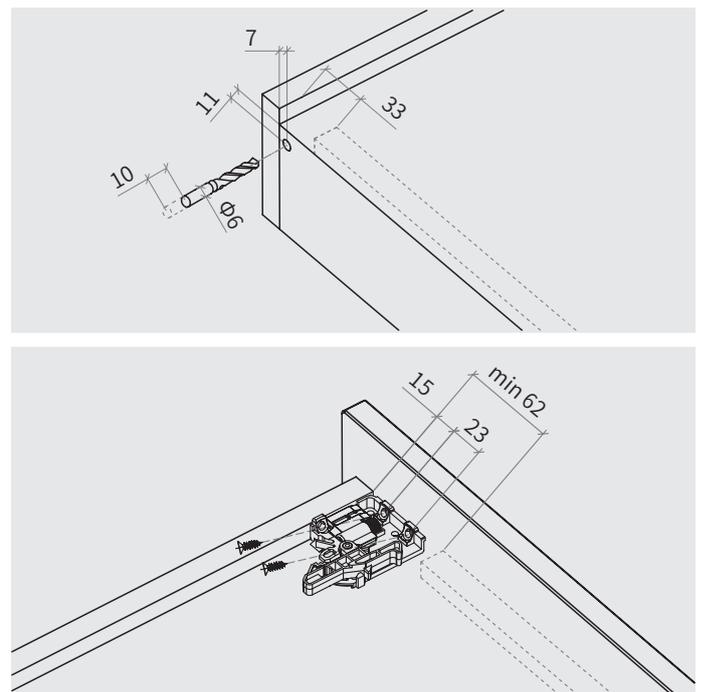

# MAJH-B

## 16mm & 19mm

系列三节同步阻尼隐藏滑轨配一维把手 (减尺)  
FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
WITH 1D HANDLE ( SHORTAGE SIZE)



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

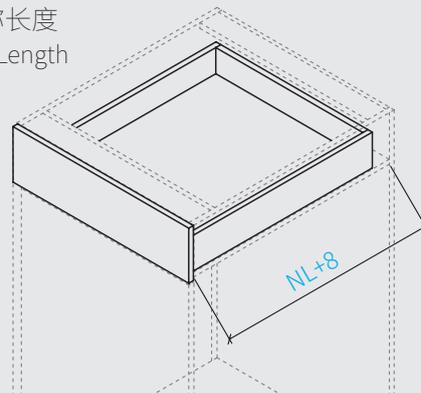

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步阻尼隐藏滑轨 (配一维把手) 左 / 右

FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
(WITH 1D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	MAJH - B (16) - 300	300 mm	MAJH - B (19) - 300
350 mm	MAJH - B (16) - 350	350 mm	MAJH - B (19) - 350
400 mm	MAJH - B (16) - 400	400 mm	MAJH - B (19) - 400
450 mm	MAJH - B (16) - 450	450 mm	MAJH - B (19) - 450
500 mm	MAJH - B (16) - 500	500 mm	MAJH - B (19) - 500
550 mm	MAJH - B (16) - 550	550 mm	MAJH - B (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

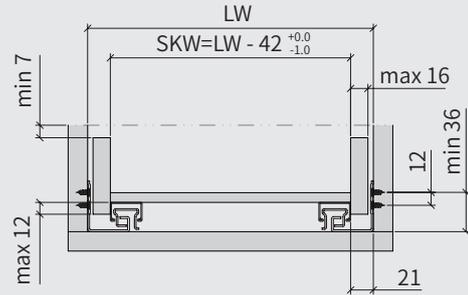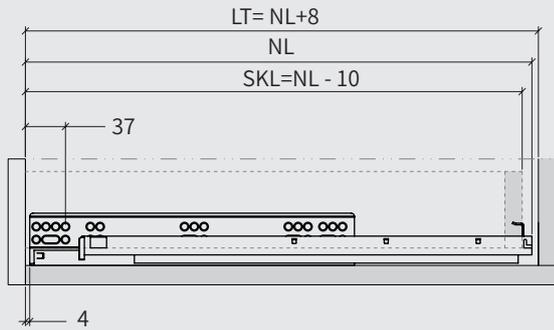

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

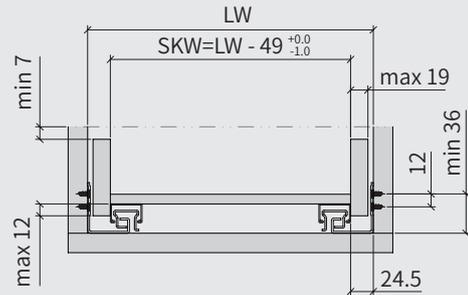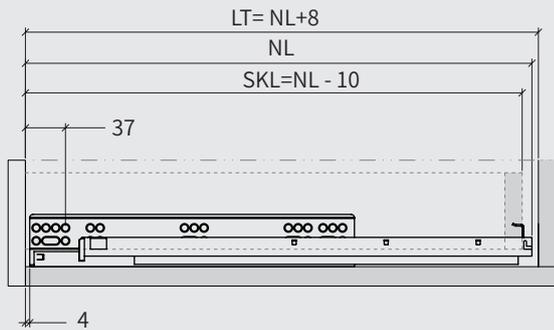

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

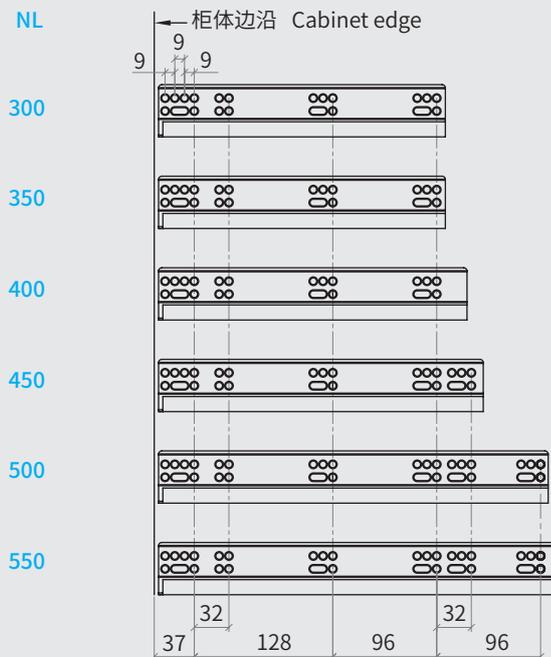

### 抽屉钻孔尺寸 (mm) drawer drill size

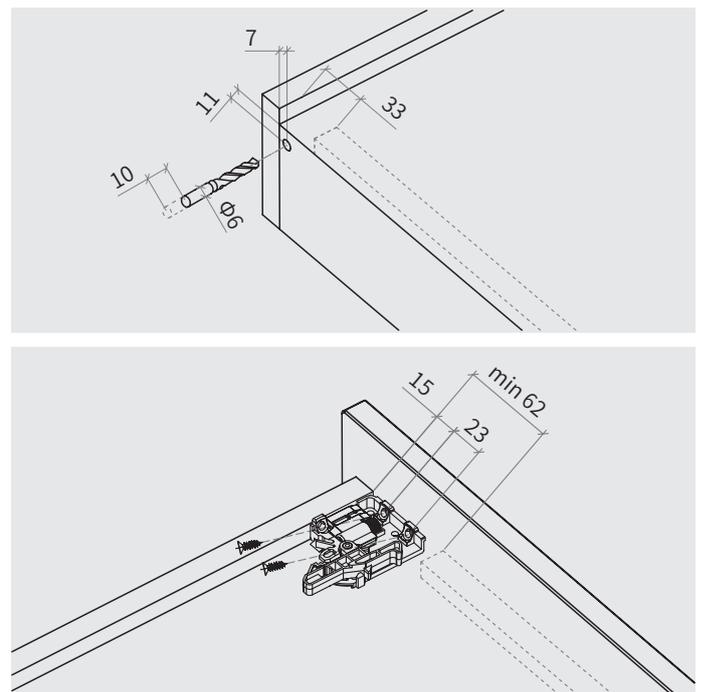



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

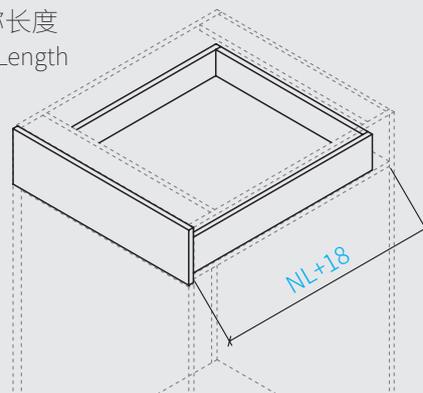

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步阻尼隐藏滑轨 (配合金把手) 左 / 右

FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
 (WITH METAL HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	AJH - C (16) - 300	300 mm	AJH - C (19) - 300
350 mm	AJH - C (16) - 350	350 mm	AJH - C (19) - 350
400 mm	AJH - C (16) - 400	400 mm	AJH - C (19) - 400
450 mm	AJH - C (16) - 450	450 mm	AJH - C (19) - 450
500 mm	AJH - C (16) - 500	500 mm	AJH - C (19) - 500
550 mm	AJH - C (16) - 550	550 mm	AJH - C (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

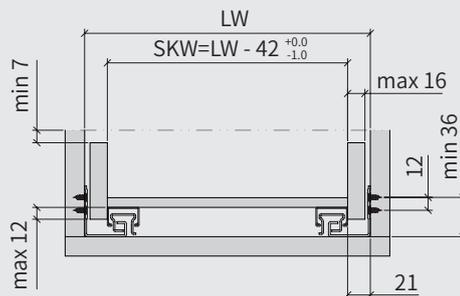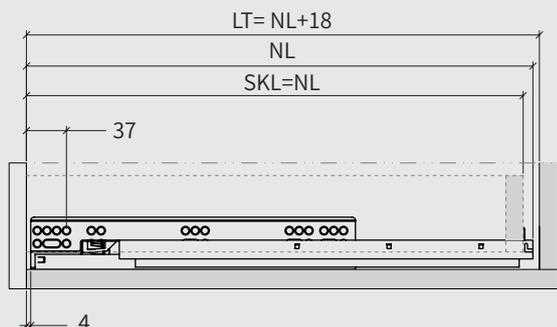

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

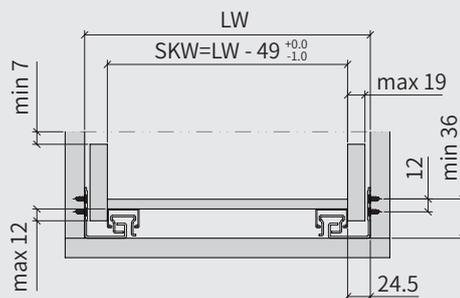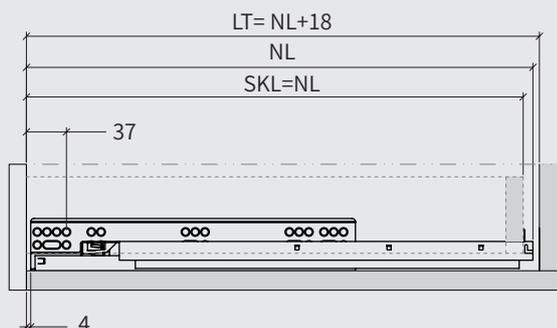

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

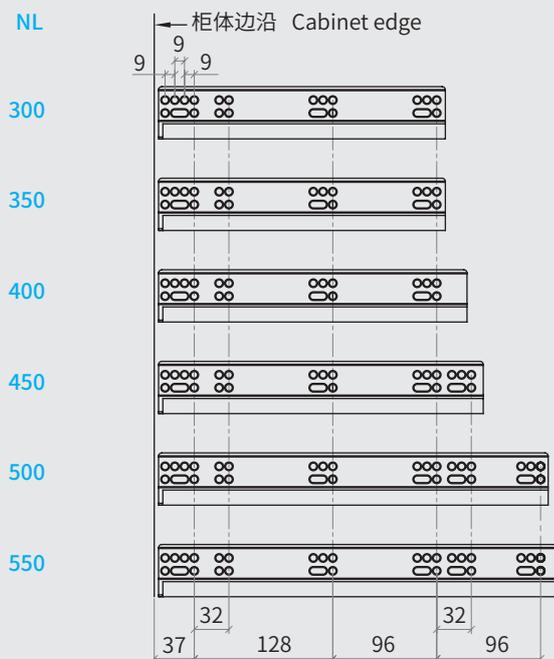

### 抽屉钻孔尺寸 (mm) drawer drill size

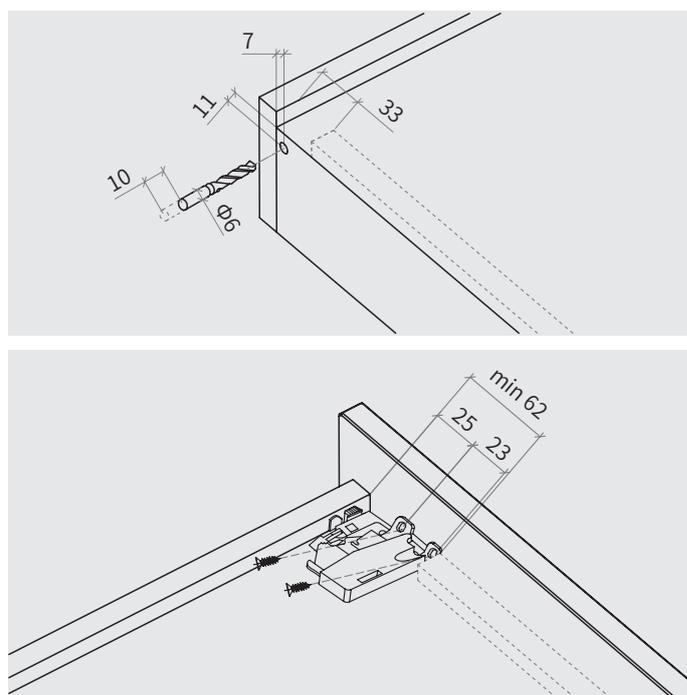

# MAJH-C

## 16mm & 19mm

系列三节同步阻尼隐藏滑轨配合金把手 (减尺)  
 FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
 WITH METAL HANDLE (SHORTAGE SIZE)



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

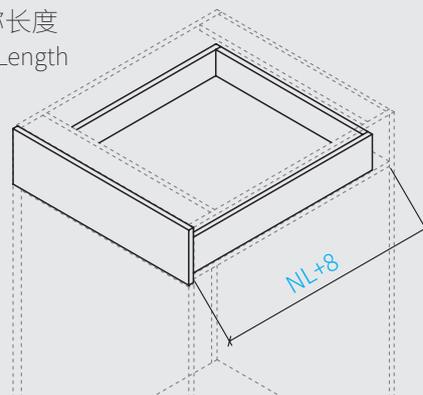

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步阻尼隐藏滑轨 (配合金把手) 左 / 右

FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
 (WITH METAL HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	MAJH - C (16) - 300	300 mm	MAJH - C (19) - 300
350 mm	MAJH - C (16) - 350	350 mm	MAJH - C (19) - 350
400 mm	MAJH - C (16) - 400	400 mm	MAJH - C (19) - 400
450 mm	MAJH - C (16) - 450	450 mm	MAJH - C (19) - 450
500 mm	MAJH - C (16) - 500	500 mm	MAJH - C (19) - 500
550 mm	MAJH - C (16) - 550	550 mm	MAJH - C (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

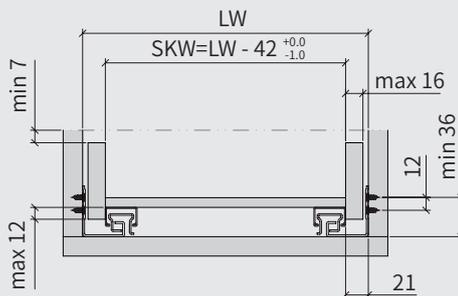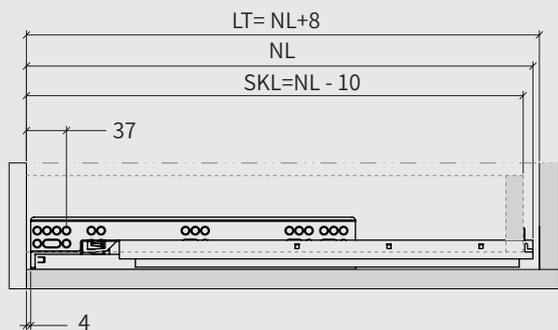

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

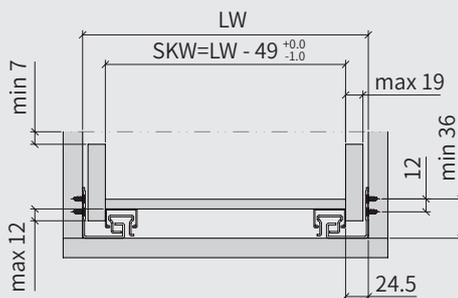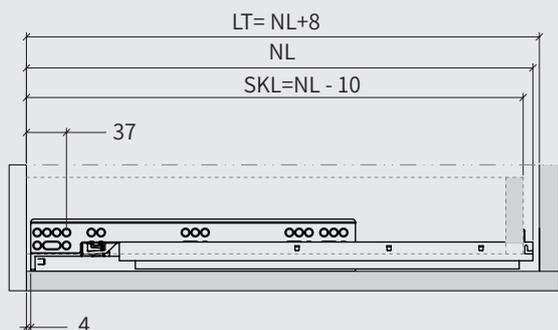

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

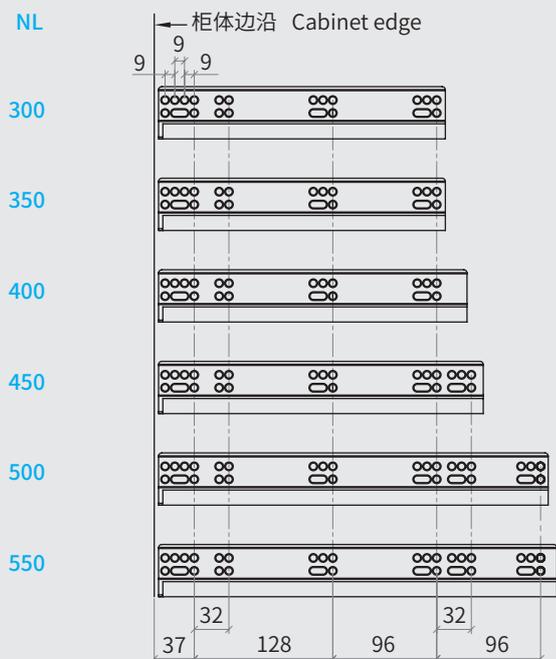

### 抽屉钻孔尺寸 (mm) drawer drill size

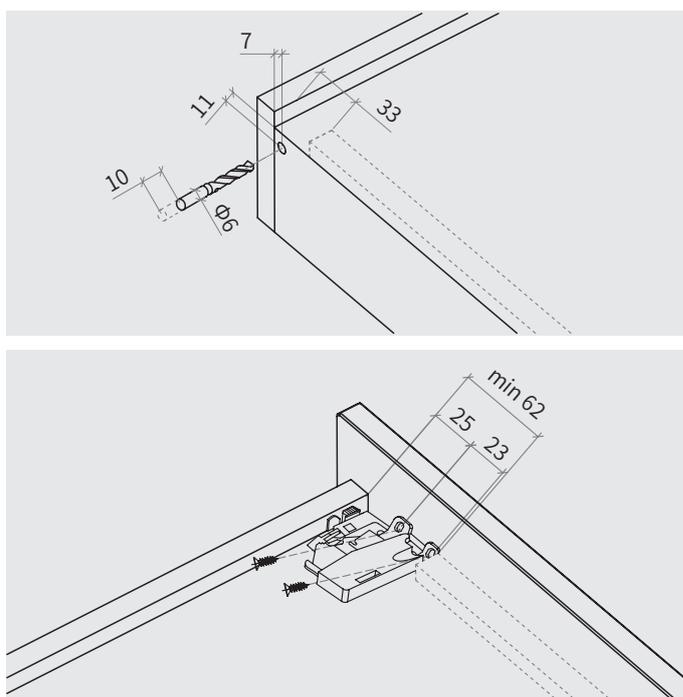

# AJH-SW-A

## 16mm & 19mm

系列三节同步阻尼隐藏滑轨配三维把手 (足尺)  
FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
WITH 3D HANDLE ( FULL SIZE)



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

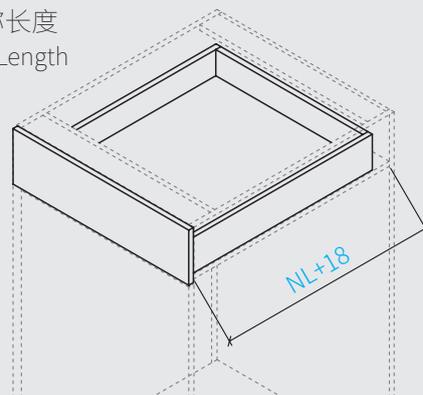

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步阻尼隐藏滑轨 (配三维把手) 左 / 右

FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
(WITH 3D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	AJH-SW-A (16) - 300	300 mm	AJH-SW-A (19) - 300
350 mm	AJH-SW-A (16) - 350	350 mm	AJH-SW-A (19) - 350
400 mm	AJH-SW-A (16) - 400	400 mm	AJH-SW-A (19) - 400
450 mm	AJH-SW-A (16) - 450	450 mm	AJH-SW-A (19) - 450
500 mm	AJH-SW-A (16) - 500	500 mm	AJH-SW-A (19) - 500
550 mm	AJH-SW-A (16) - 550	550 mm	AJH-SW-A (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

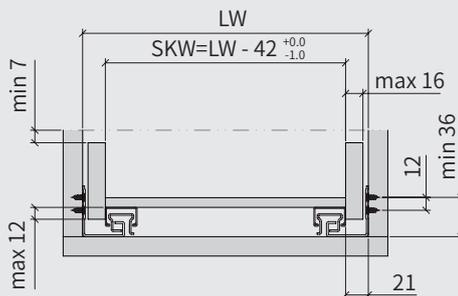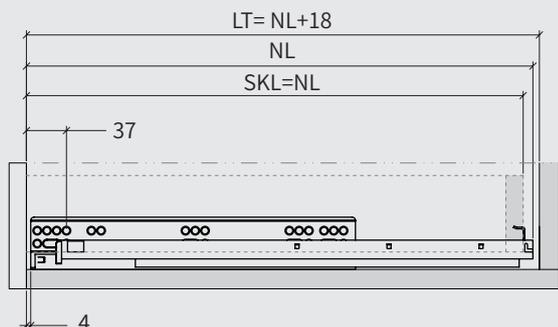

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

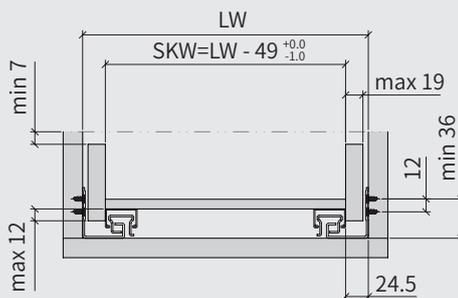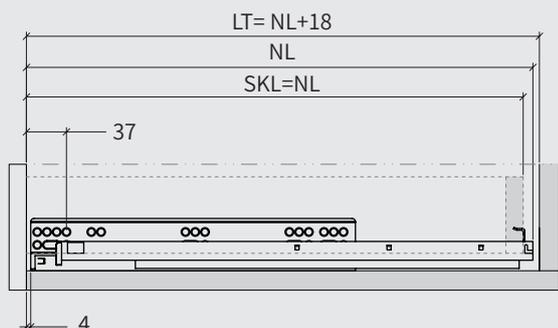

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

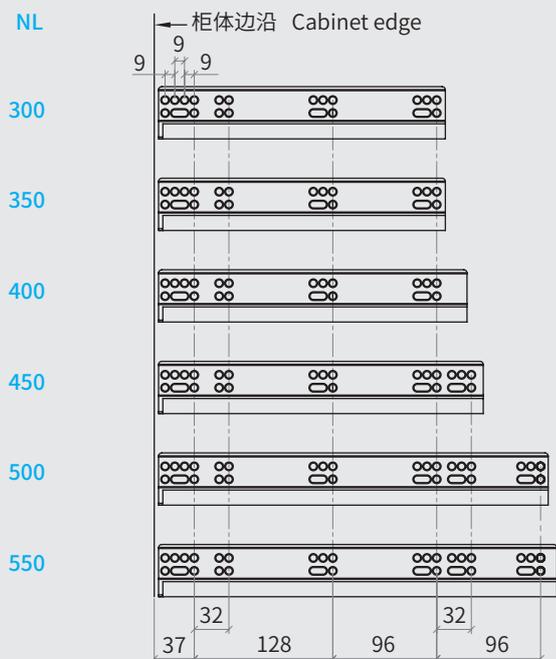

### 抽屉钻孔尺寸 (mm) drawer drill size

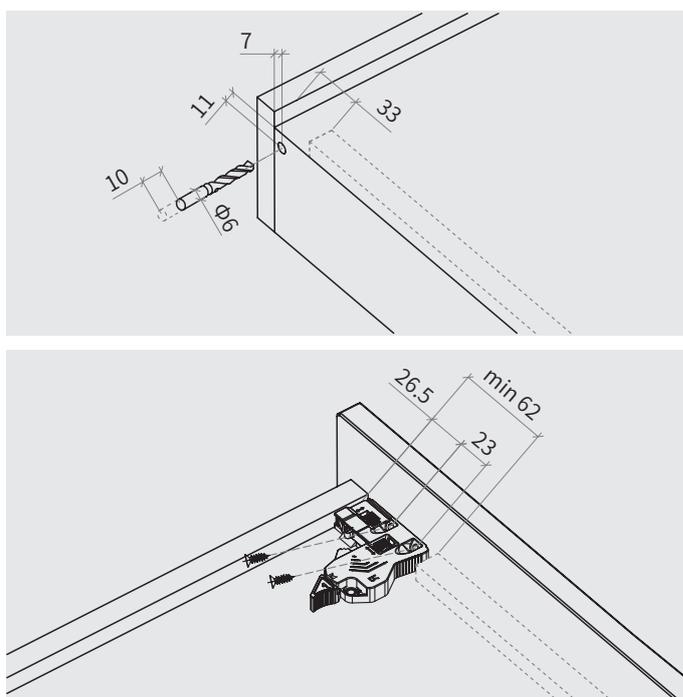

# MAJH-SW-A

## 16mm & 19mm

系列三节同步阻尼隐藏滑轨配三维把手 (减尺)  
FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES WITH 3D HANDLE (SHORTAGE SIZE)



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

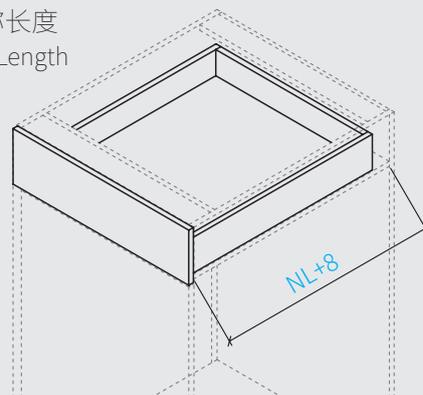

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步阻尼隐藏滑轨 (配三维把手) 左 / 右

FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES (WITH 3D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	MAJH-SW-A (16) - 300	300 mm	MAJH-SW-A (19) - 300
350 mm	MAJH-SW-A (16) - 350	350 mm	MAJH-SW-A (19) - 350
400 mm	MAJH-SW-A (16) - 400	400 mm	MAJH-SW-A (19) - 400
450 mm	MAJH-SW-A (16) - 450	450 mm	MAJH-SW-A (19) - 450
500 mm	MAJH-SW-A (16) - 500	500 mm	MAJH-SW-A (19) - 500
550 mm	MAJH-SW-A (16) - 550	550 mm	MAJH-SW-A (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

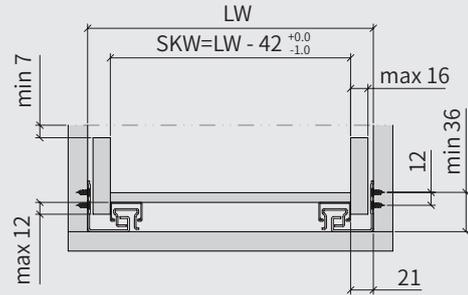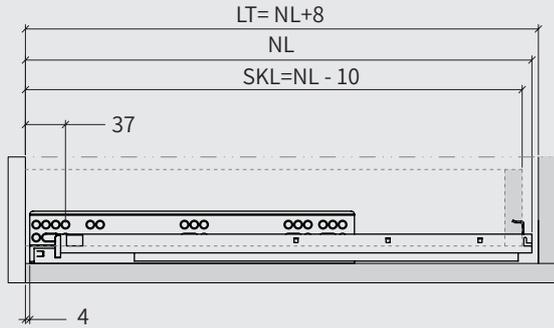

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

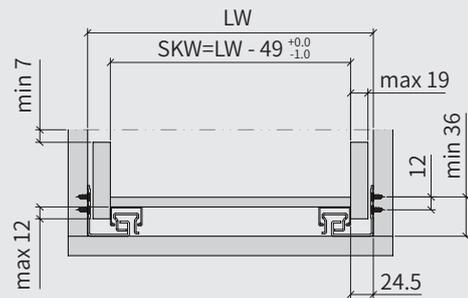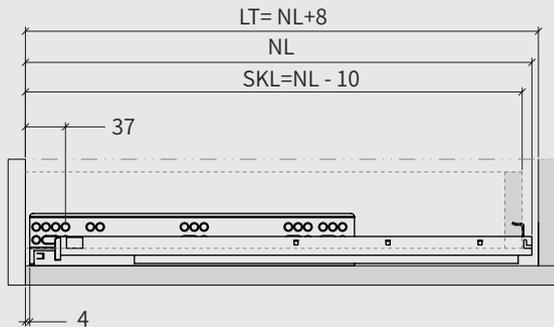

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

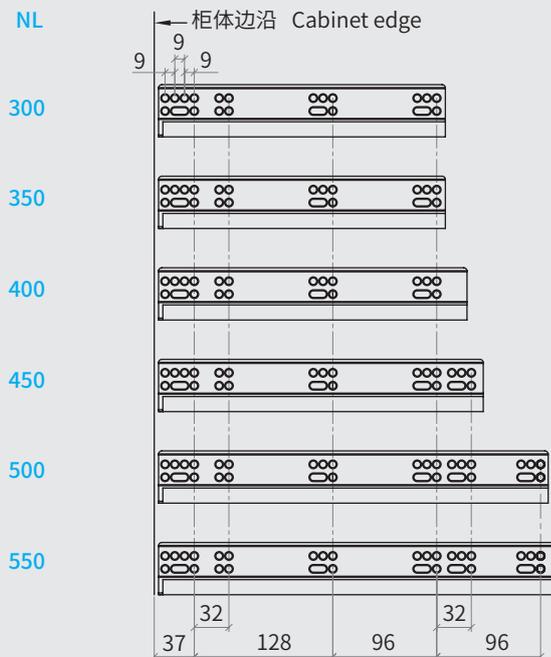

### 抽屉钻孔尺寸 (mm) drawer drill size

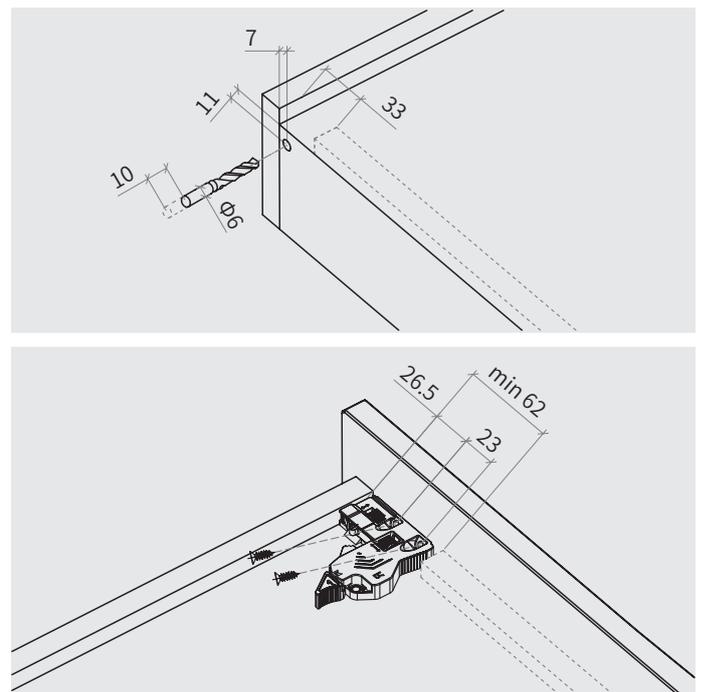



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

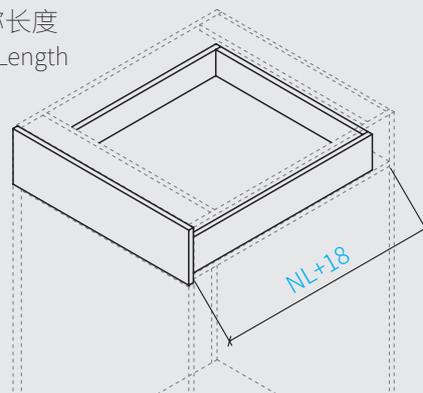

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步阻尼隐藏滑轨 (配插销) 左 / 右

FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
(WITH PIN) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	ATH - A (16) - 300	300 mm	ATH - A (19) - 300
350 mm	ATH - A (16) - 350	350 mm	ATH - A (19) - 350
400 mm	ATH - A (16) - 400	400 mm	ATH - A (19) - 400
450 mm	ATH - A (16) - 450	450 mm	ATH - A (19) - 450
500 mm	ATH - A (16) - 500	500 mm	ATH - A (19) - 500
550 mm	ATH - A (16) - 550	550 mm	ATH - A (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

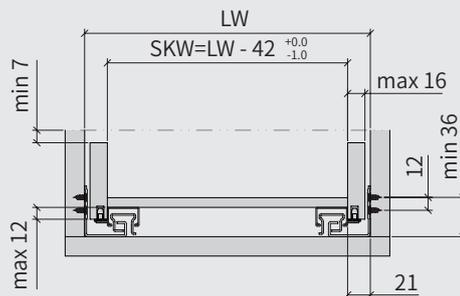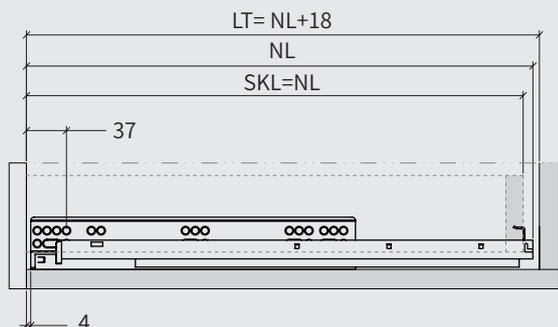

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

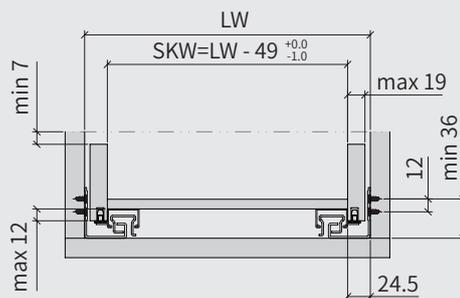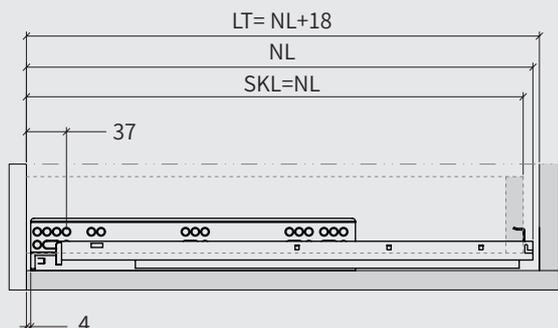

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

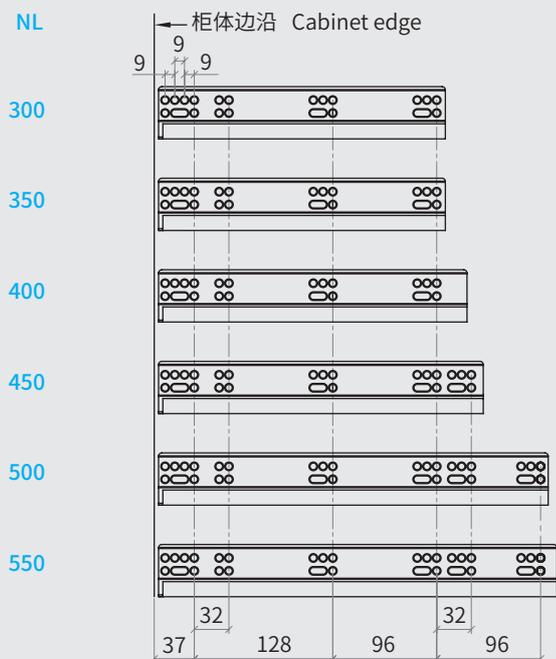

### 抽屉钻孔尺寸 (mm) drawer drill size

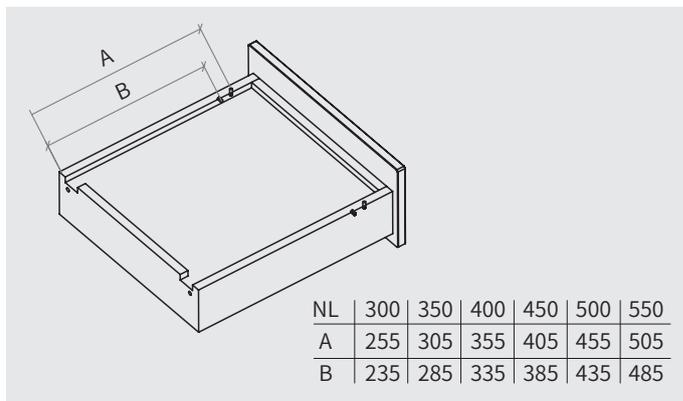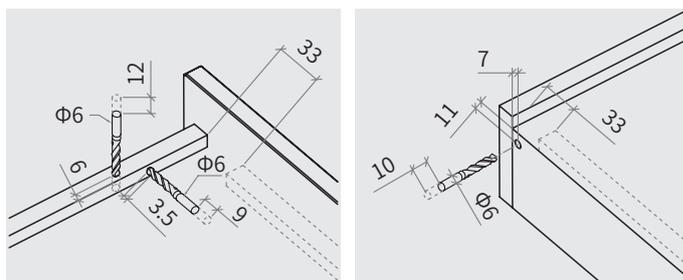



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

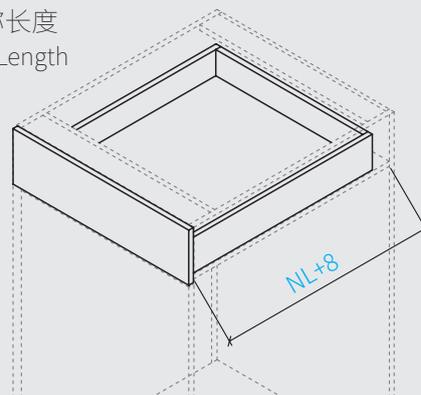

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步阻尼隐藏滑轨 (配插销) 左 / 右

FULL EXTENSION SYNCHRONIZED CONCEALED DRAWER SLIDES  
 (WITH PIN) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	MATH - A (16) - 300	300 mm	MATH - A (19) - 300
350 mm	MATH - A (16) - 350	350 mm	MATH - A (19) - 350
400 mm	MATH - A (16) - 400	400 mm	MATH - A (19) - 400
450 mm	MATH - A (16) - 450	450 mm	MATH - A (19) - 450
500 mm	MATH - A (16) - 500	500 mm	MATH - A (19) - 500
550 mm	MATH - A (16) - 550	550 mm	MATH - A (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

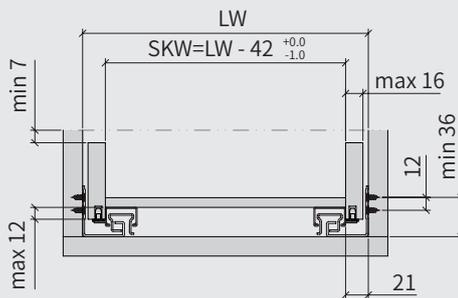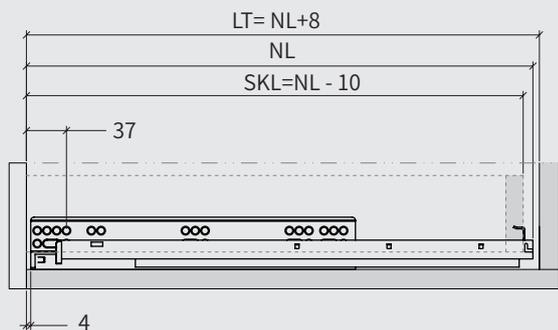

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

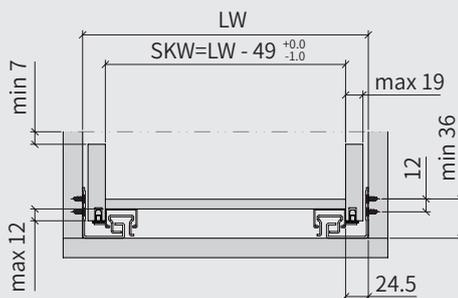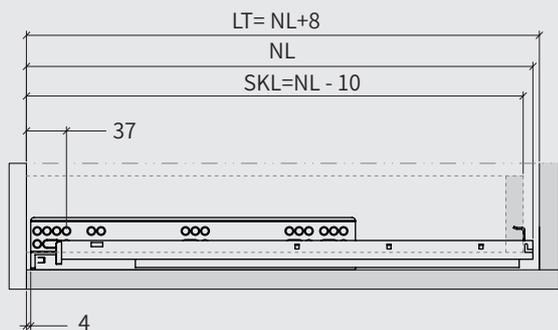

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

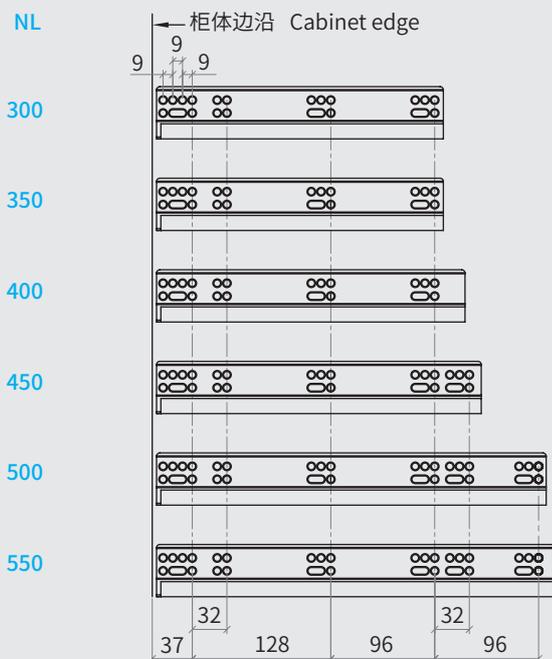

### 抽屉钻孔尺寸 (mm) drawer drill size

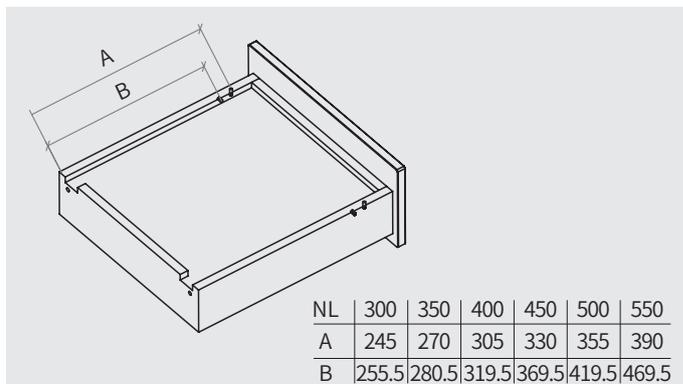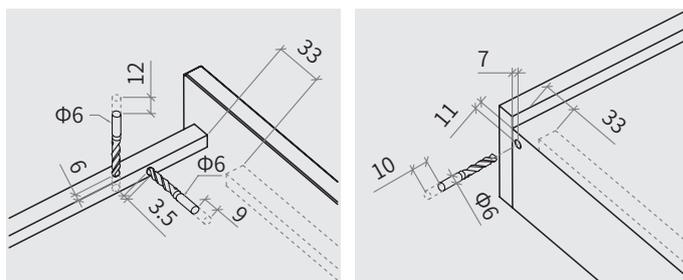

# FULL EXTENSION CONCEALED DRAWER SLIDES

## 三节普通阻尼隐藏滑轨



家乐斯

HOUSEHOLD HARDWARE  
PRODUCT MANUAL



配二维把手



配一维把手



配合金把手



配插销



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

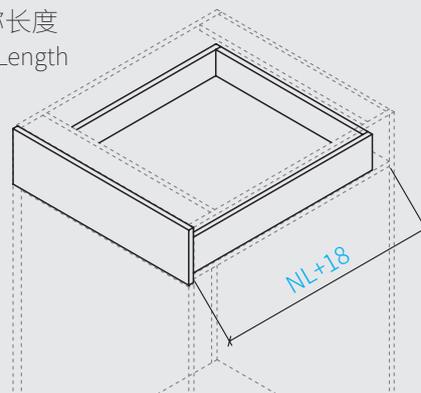

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通阻尼隐藏滑轨 (配二维把手) 左 / 右

FULL EXTENSION CONCEALED DRAWER SLIDES  
 (WITH 2D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	CJH - A (16) - 250	250 mm	CJH - A (19) - 250
300 mm	CJH - A (16) - 300	300 mm	CJH - A (19) - 300
350 mm	CJH - A (16) - 350	350 mm	CJH - A (19) - 350
400 mm	CJH - A (16) - 400	400 mm	CJH - A (19) - 400
450 mm	CJH - A (16) - 450	450 mm	CJH - A (19) - 450
500 mm	CJH - A (16) - 500	500 mm	CJH - A (19) - 500
550 mm	CJH - A (16) - 550	550 mm	CJH - A (19) - 550
600 mm	CJH - A (16) - 600	600 mm	CJH - A (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

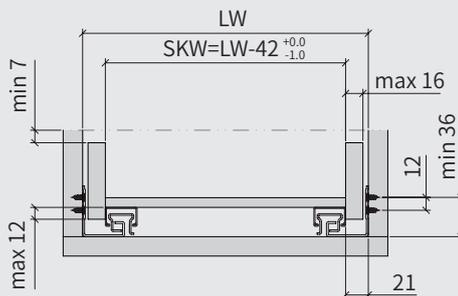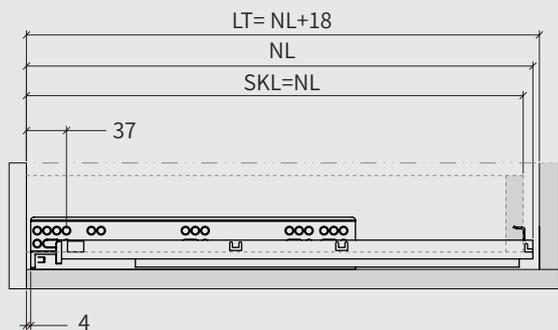

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

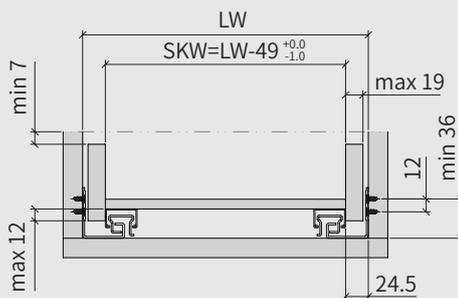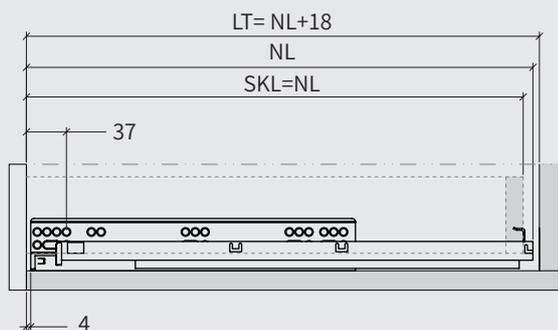

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

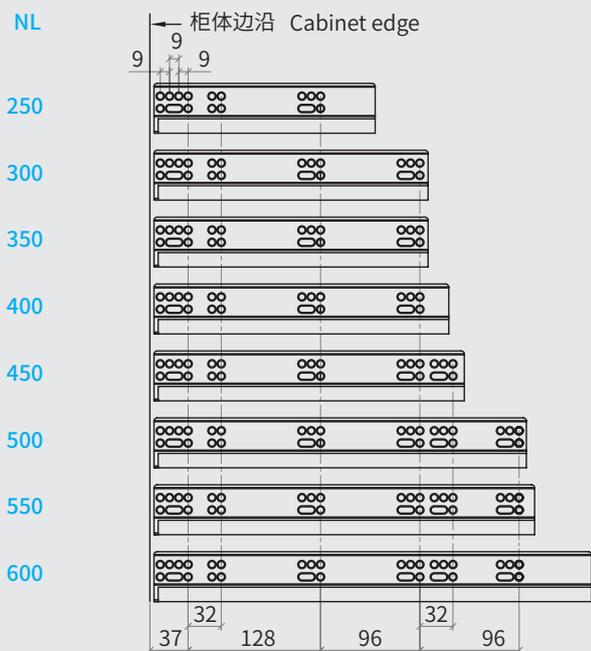

### 抽屉钻孔尺寸 (mm) drawer drill size

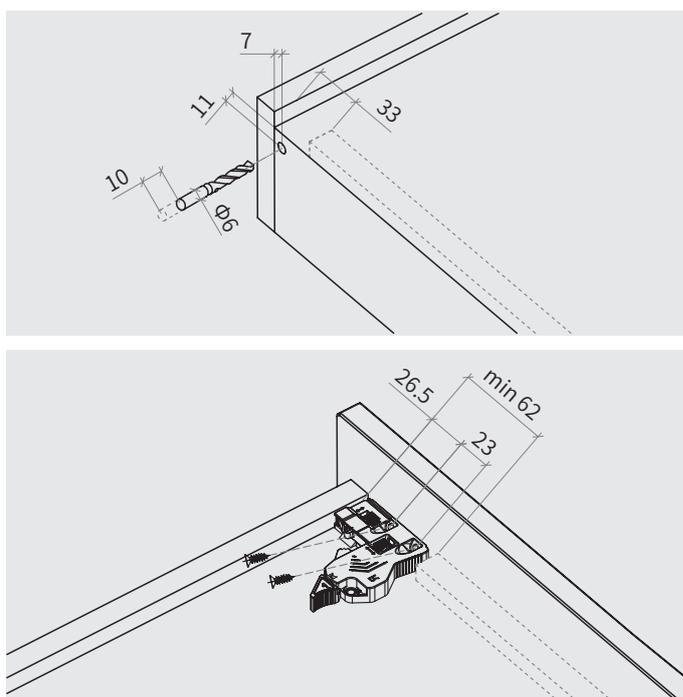

# MCJH-A

## 16mm & 19mm

系列三节普通阻尼隐藏滑轨配二维把手 (减尺)  
 FULL EXTENSION CONCEALED DRAWER SLIDES  
 WITH 2D HANDLE ( SHORTAGE SIZE)



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

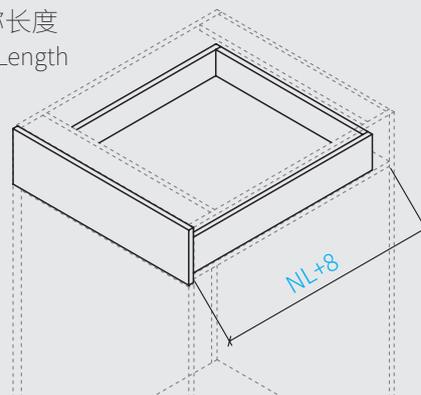

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通阻尼隐藏滑轨 (配二维把手) 左 / 右

FULL EXTENSION CONCEALED DRAWER SLIDES  
 (WITH 2D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MCJH - A (16) - 250	250 mm	MCJH - A (19) - 250
300 mm	MCJH - A (16) - 300	300 mm	MCJH - A (19) - 300
350 mm	MCJH - A (16) - 350	350 mm	MCJH - A (19) - 350
400 mm	MCJH - A (16) - 400	400 mm	MCJH - A (19) - 400
450 mm	MCJH - A (16) - 450	450 mm	MCJH - A (19) - 450
500 mm	MCJH - A (16) - 500	500 mm	MCJH - A (19) - 500
550 mm	MCJH - A (16) - 550	550 mm	MCJH - A (19) - 550
600 mm	MCJH - A (16) - 600	600 mm	MCJH - A (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

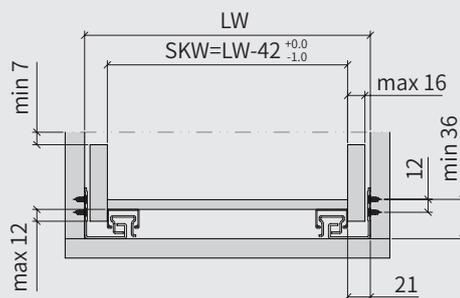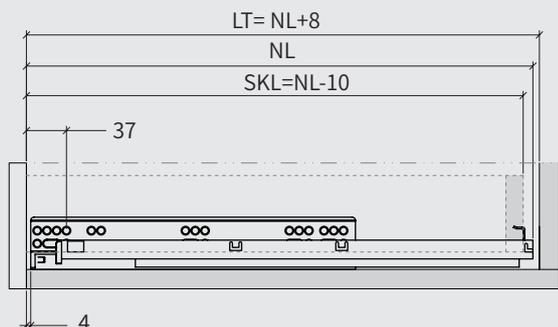

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

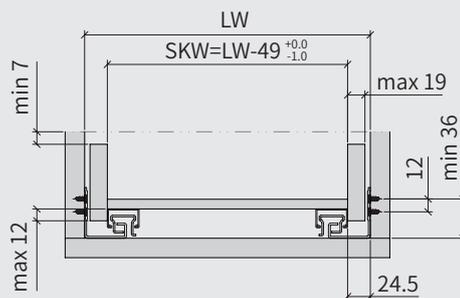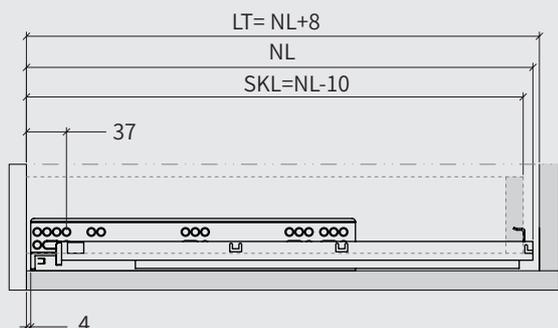

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

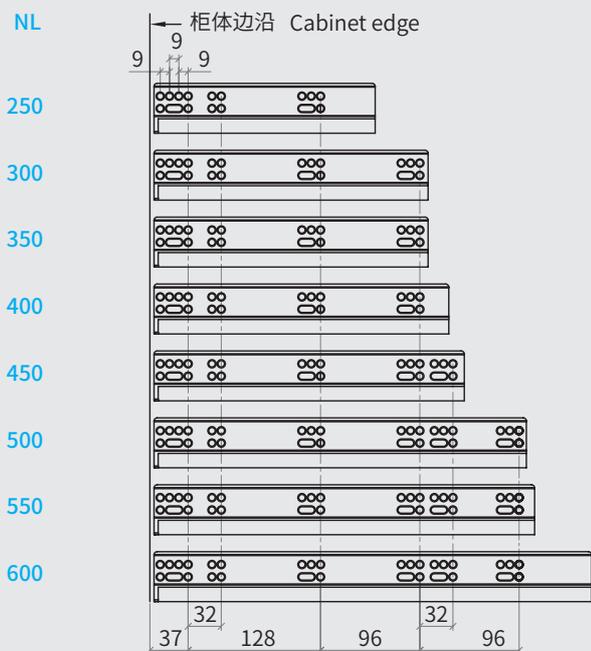

### 抽屉钻孔尺寸 (mm) drawer drill size

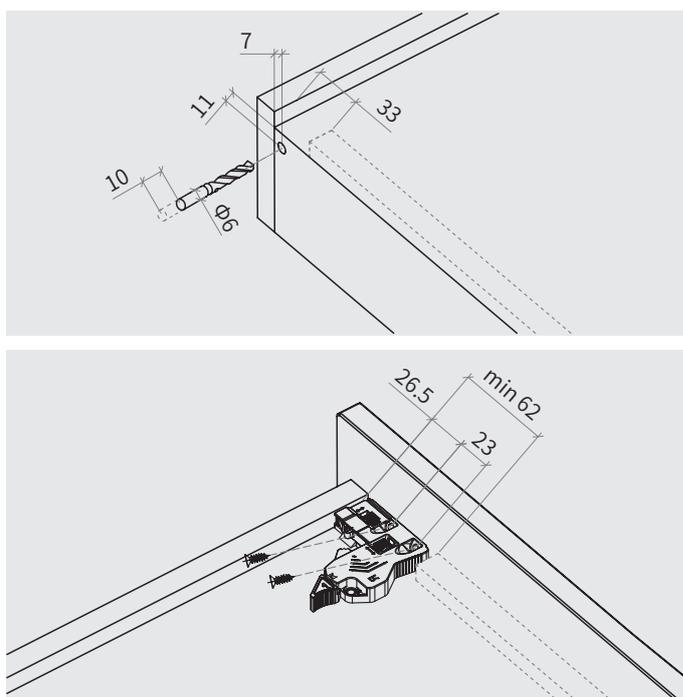



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

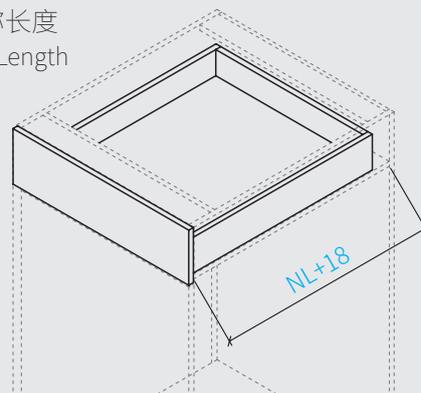

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通阻尼隐藏滑轨 (配一维把手) 左 / 右

FULL EXTENSION CONCEALED DRAWER SLIDES  
 (WITH 1D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	CJH - B (16) - 250	250 mm	CJH - B (19) - 250
300 mm	CJH - B (16) - 300	300 mm	CJH - B (19) - 300
350 mm	CJH - B (16) - 350	350 mm	CJH - B (19) - 350
400 mm	CJH - B (16) - 400	400 mm	CJH - B (19) - 400
450 mm	CJH - B (16) - 450	450 mm	CJH - B (19) - 450
500 mm	CJH - B (16) - 500	500 mm	CJH - B (19) - 500
550 mm	CJH - B (16) - 550	550 mm	CJH - B (19) - 550
600 mm	CJH - B (16) - 600	600 mm	CJH - B (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

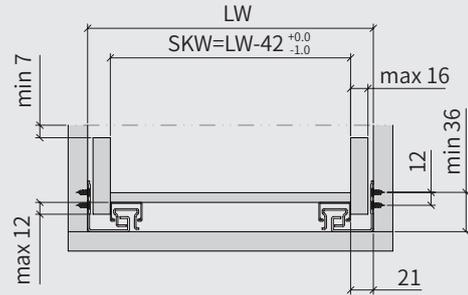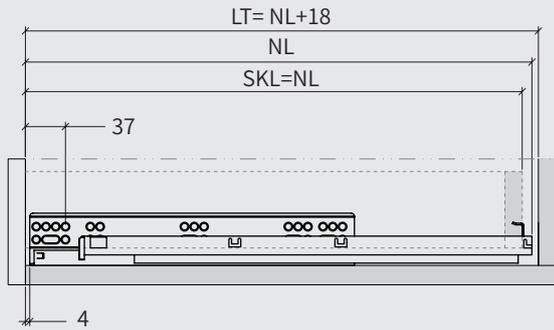

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

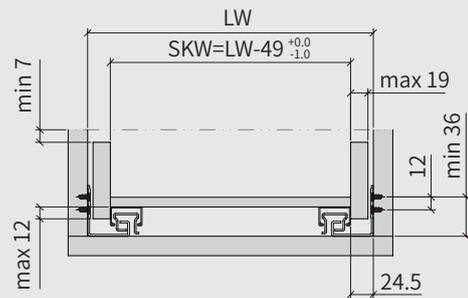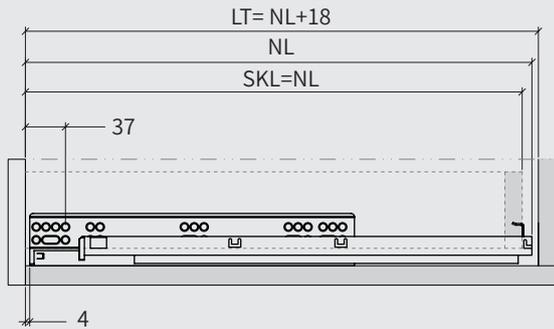

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

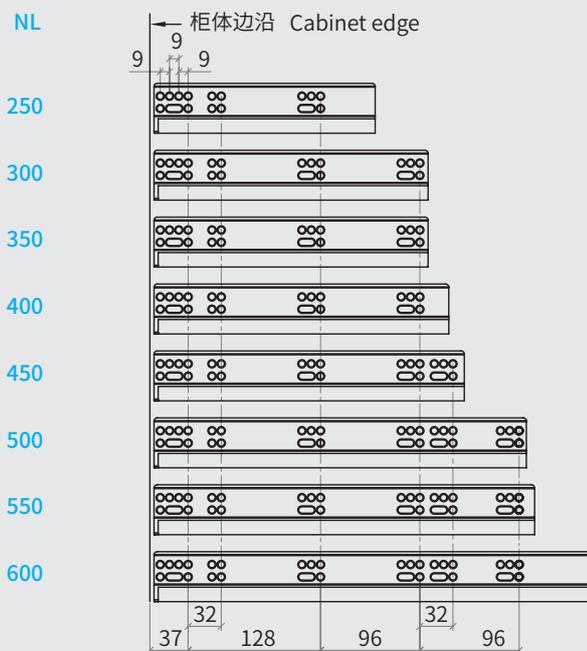

### 抽屉钻孔尺寸 (mm) drawer drill size

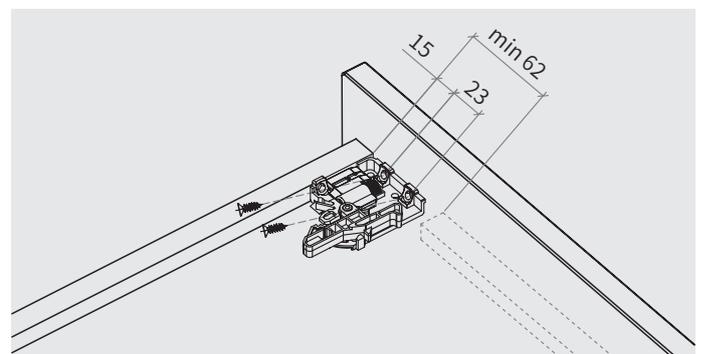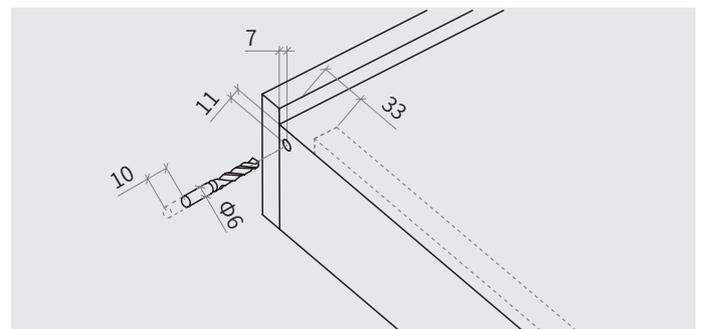

# MCJH-B

## 16mm & 19mm

系列三节普通阻尼隐藏滑轨配一维把手 (减尺)  
 FULL EXTENSION CONCEALED DRAWER SLIDES  
 WITH 1D HANDLE (SHORTAGE SIZE)



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

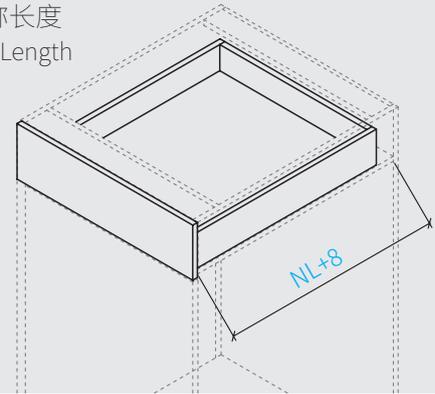

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通阻尼隐藏滑轨 (配一维把手) 左 / 右

FULL EXTENSION CONCEALED DRAWER SLIDES  
 (WITH 1D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MCJH - B (16) - 250	250 mm	MCJH - B (19) - 250
300 mm	MCJH - B (16) - 300	300 mm	MCJH - B (19) - 300
350 mm	MCJH - B (16) - 350	350 mm	MCJH - B (19) - 350
400 mm	MCJH - B (16) - 400	400 mm	MCJH - B (19) - 400
450 mm	MCJH - B (16) - 450	450 mm	MCJH - B (19) - 450
500 mm	MCJH - B (16) - 500	500 mm	MCJH - B (19) - 500
550 mm	MCJH - B (16) - 550	550 mm	MCJH - B (19) - 550
600 mm	MCJH - B (16) - 600	600 mm	MCJH - B (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

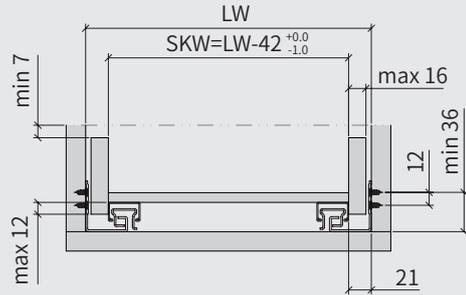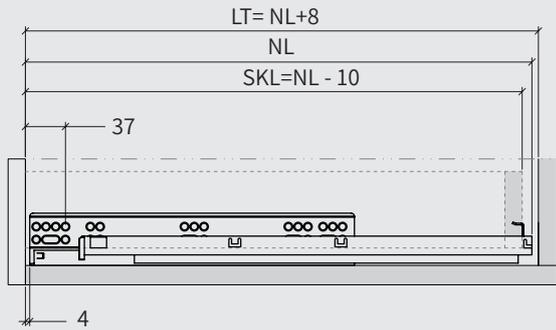

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

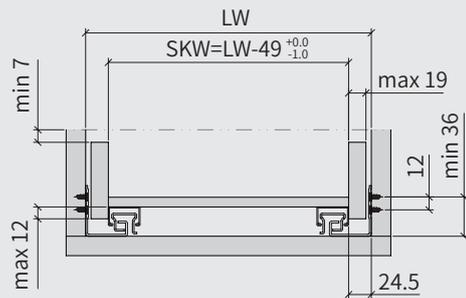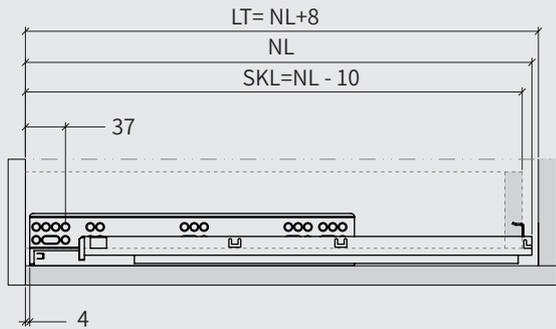

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

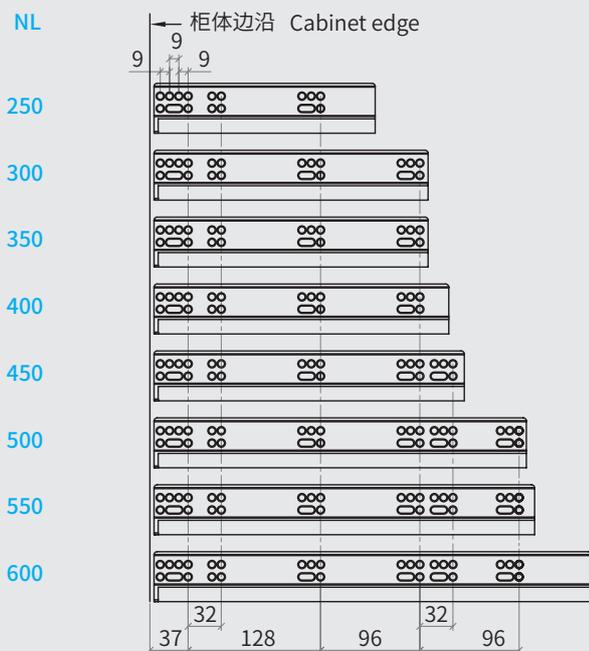

### 抽屉钻孔尺寸 (mm) drawer drill size

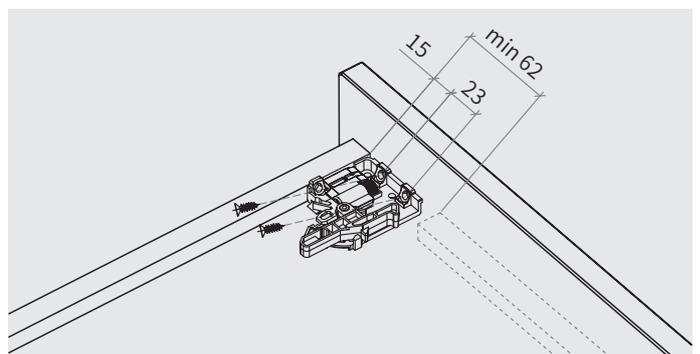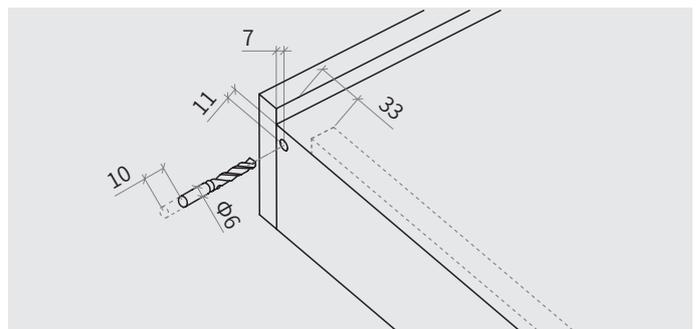



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

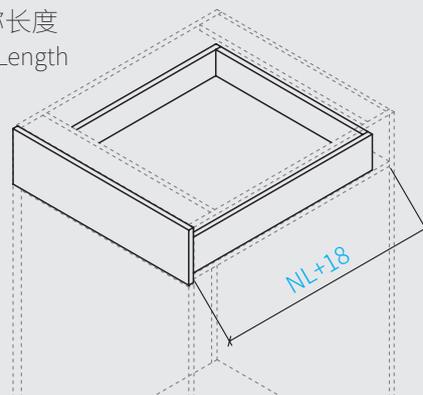

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通阻尼隐藏滑轨 (配合金把手) 左 / 右

FULL EXTENSION CONCEALED DRAWER SLIDES (WITH METAL HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	CJH - C (16) - 250	250 mm	CJH - C (19) - 250
300 mm	CJH - C (16) - 300	300 mm	CJH - C (19) - 300
350 mm	CJH - C (16) - 350	350 mm	CJH - C (19) - 350
400 mm	CJH - C (16) - 400	400 mm	CJH - C (19) - 400
450 mm	CJH - C (16) - 450	450 mm	CJH - C (19) - 450
500 mm	CJH - C (16) - 500	500 mm	CJH - C (19) - 500
550 mm	CJH - C (16) - 550	550 mm	CJH - C (19) - 550
600 mm	CJH - C (16) - 600	600 mm	CJH - C (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

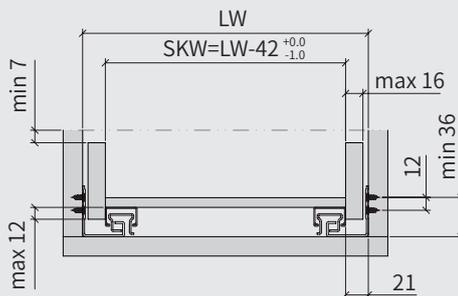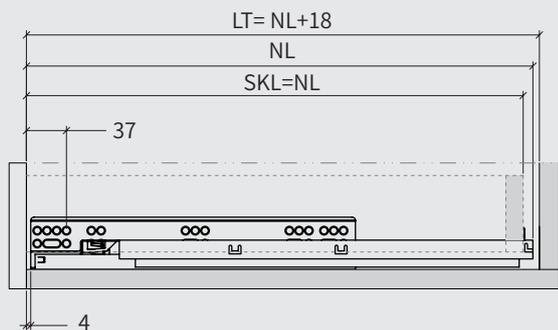

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

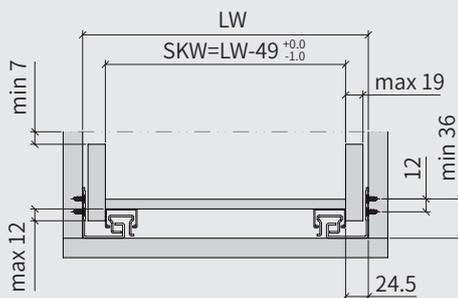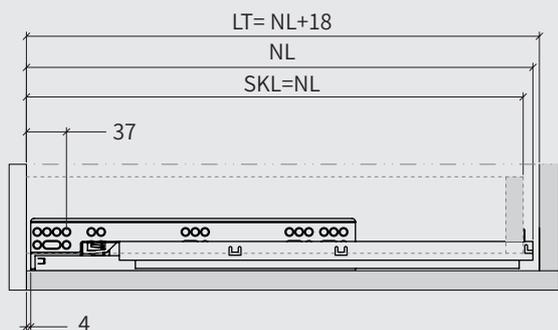

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

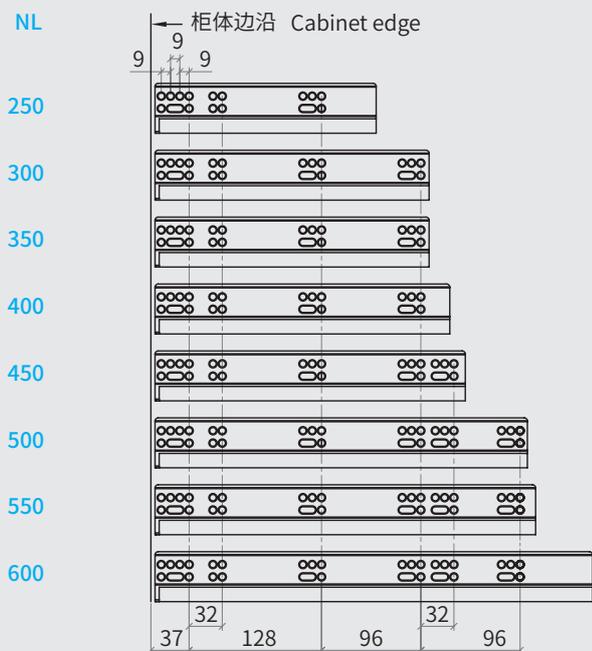

### 抽屉钻孔尺寸 (mm) drawer drill size

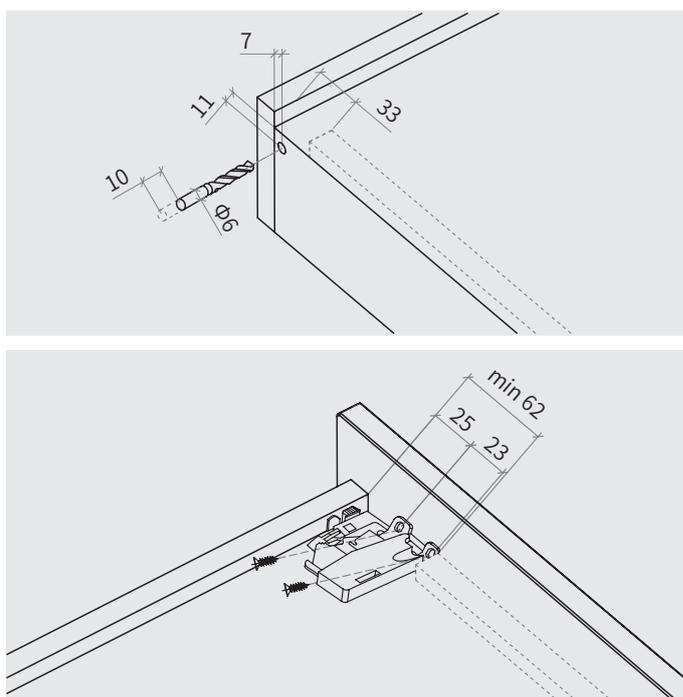

# MCJH-C

## 16mm & 19mm

系列三节普通阻尼隐藏滑轨配合金把手 (减尺)  
 FULL EXTENSION CONCEALED DRAWER SLIDES  
 WITH METAL HANDLE (SHORTAGE SIZE)



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

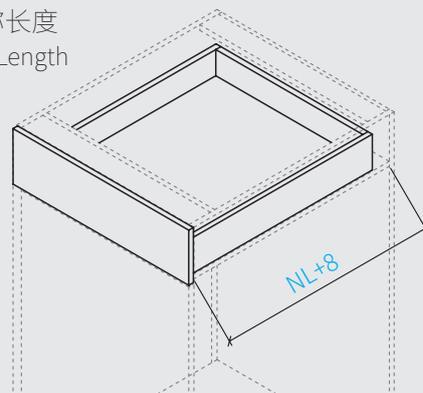

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通阻尼隐藏滑轨 (配合金把手) 左 / 右

FULL EXTENSION CONCEALED DRAWER SLIDES  
 (WITH METAL HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MCJH - C (16) - 250	250 mm	MCJH - C (19) - 250
300 mm	MCJH - C (16) - 300	300 mm	MCJH - C (19) - 300
350 mm	MCJH - C (16) - 350	350 mm	MCJH - C (19) - 350
400 mm	MCJH - C (16) - 400	400 mm	MCJH - C (19) - 400
450 mm	MCJH - C (16) - 450	450 mm	MCJH - C (19) - 450
500 mm	MCJH - C (16) - 500	500 mm	MCJH - C (19) - 500
550 mm	MCJH - C (16) - 550	550 mm	MCJH - C (19) - 550
600 mm	MCJH - C (16) - 600	600 mm	MCJH - C (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

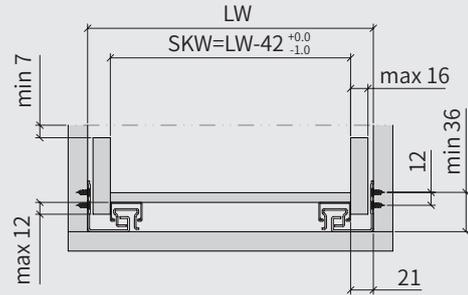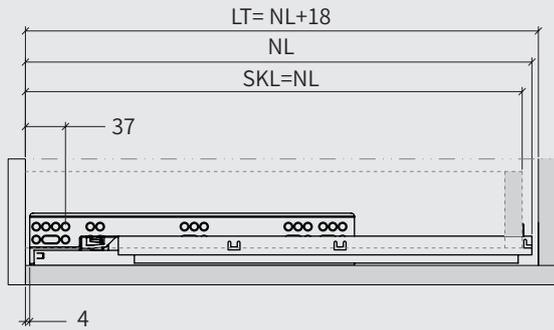

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

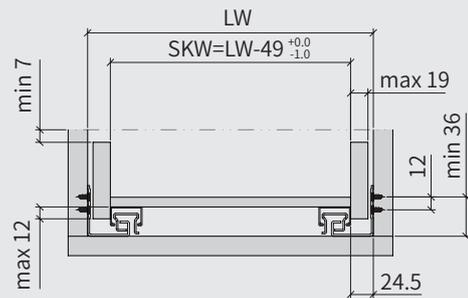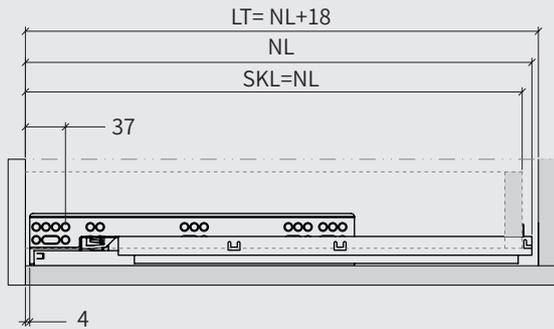

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

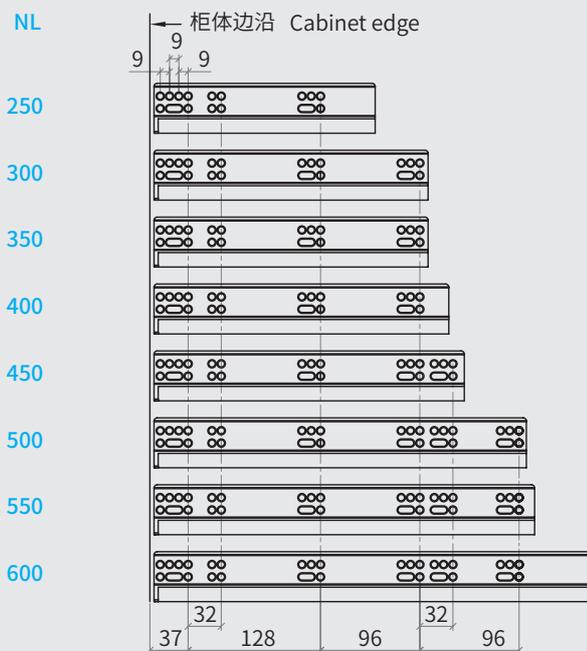

### 抽屉钻孔尺寸 (mm) drawer drill size

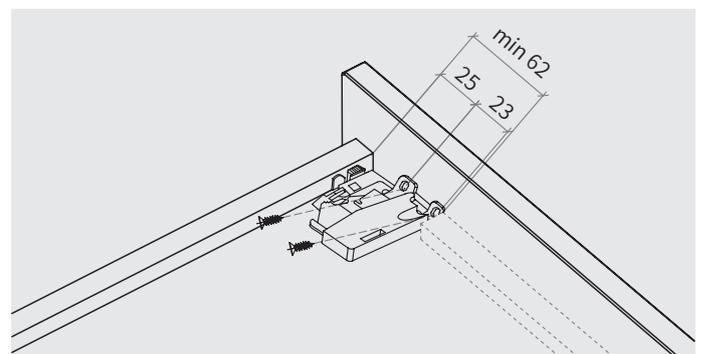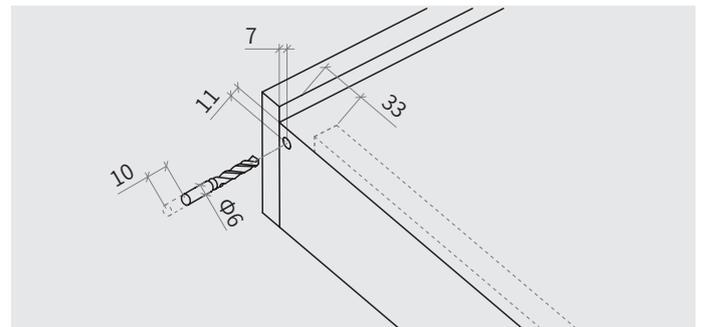

# CJH-SW-A

## 16mm & 19mm

系列三节普通阻尼隐藏滑轨配三维把手 (足尺)

FULL EXTENSION CONCEALED DRAWER SLIDES WITH 3D HANDLE (FULL SIZE)



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

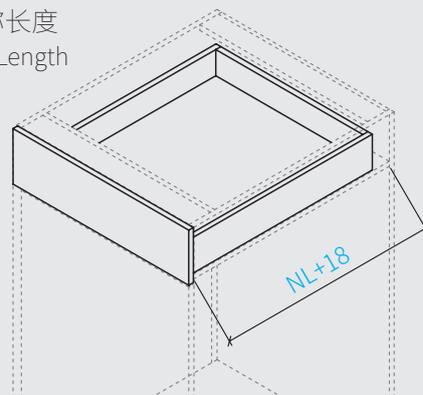

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通阻尼隐藏滑轨 (配三维把手) 左 / 右

FULL EXTENSION CONCEALED DRAWER SLIDES (WITH 3D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	CJH-SW-A (16) - 250	250 mm	CJH-SW-A (19) - 250
300 mm	CJH-SW-A (16) - 300	300 mm	CJH-SW-A (19) - 300
350 mm	CJH-SW-A (16) - 350	350 mm	CJH-SW-A (19) - 350
400 mm	CJH-SW-A (16) - 400	400 mm	CJH-SW-A (19) - 400
450 mm	CJH-SW-A (16) - 450	450 mm	CJH-SW-A (19) - 450
500 mm	CJH-SW-A (16) - 500	500 mm	CJH-SW-A (19) - 500
550 mm	CJH-SW-A (16) - 550	550 mm	CJH-SW-A (19) - 550
600 mm	CJH-SW-A (16) - 600	600 mm	CJH-SW-A (19) - 600



16mm 柜体安装所需空间 Space Requirement

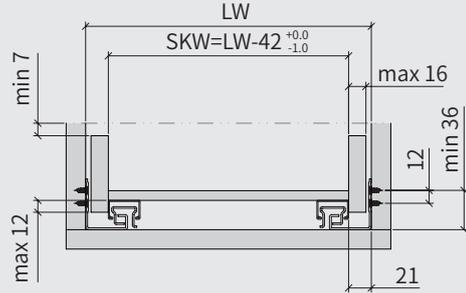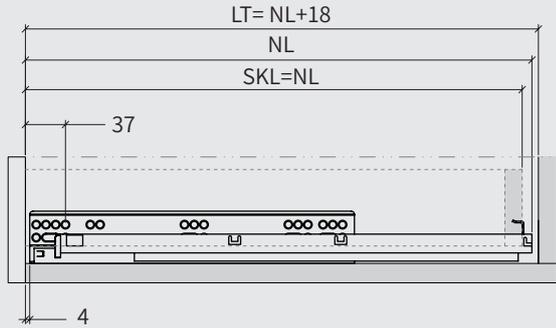

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



19mm 柜体安装所需空间 Space Requirement

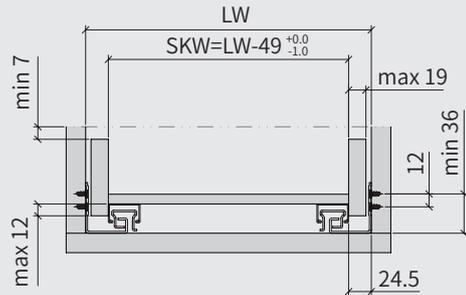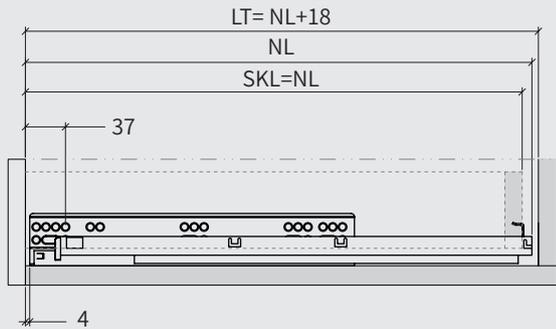

滑轨安装孔尺寸 (mm) Slide rail mounting hole size

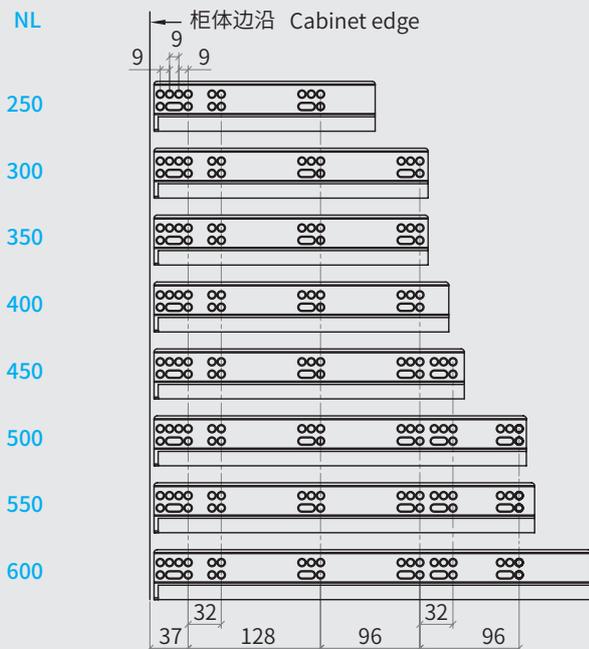

抽屉钻孔尺寸 (mm) drawer drill size

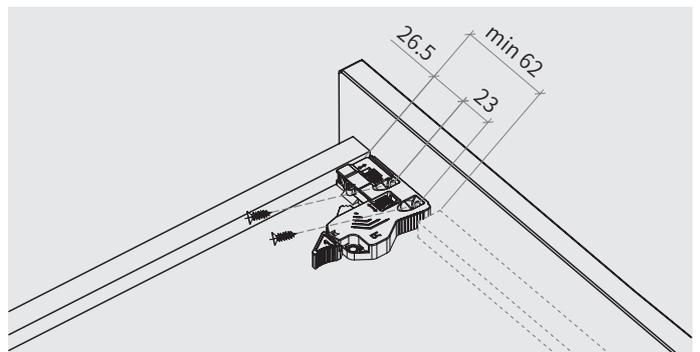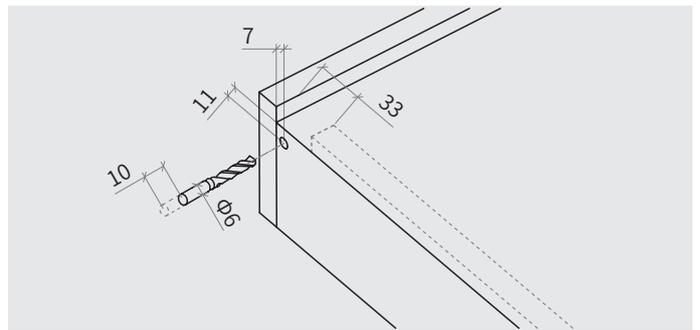

# MCJH-SW-A

## 16mm & 19mm

系列三节普通阻尼隐藏滑轨配三维把手 (减尺)  
 FULL EXTENSION CONCEALED DRAWER SLIDES  
 WITH 3D HANDLE ( SHORTAGE SIZE)



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

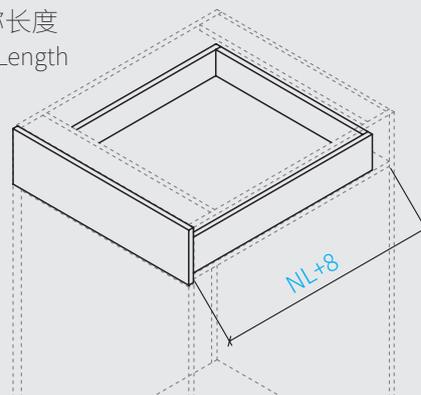

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通阻尼隐藏滑轨 (配三维把手) 左 / 右

FULL EXTENSION CONCEALED DRAWER SLIDES  
 (WITH 3D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MCJH-SW-A (16) - 250	250 mm	MCJH-SW-A (19) - 250
300 mm	MCJH-SW-A (16) - 300	300 mm	MCJH-SW-A (19) - 300
350 mm	MCJH-SW-A (16) - 350	350 mm	MCJH-SW-A (19) - 350
400 mm	MCJH-SW-A (16) - 400	400 mm	MCJH-SW-A (19) - 400
450 mm	MCJH-SW-A (16) - 450	450 mm	MCJH-SW-A (19) - 450
500 mm	MCJH-SW-A (16) - 500	500 mm	MCJH-SW-A (19) - 500
550 mm	MCJH-SW-A (16) - 550	550 mm	MCJH-SW-A (19) - 550
600 mm	MCJH-SW-A (16) - 600	600 mm	MCJH-SW-A (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

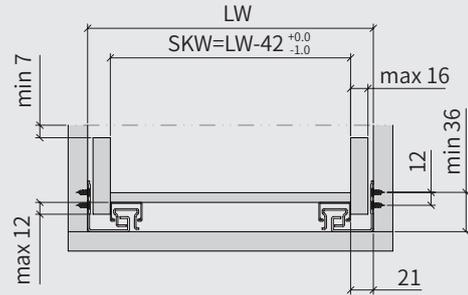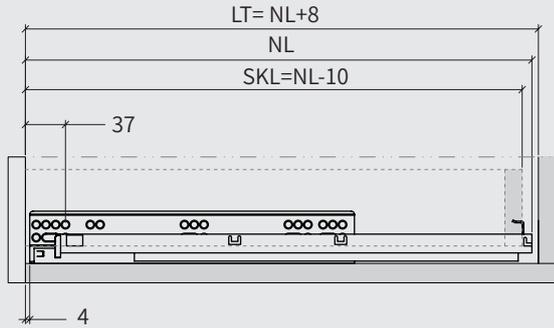

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

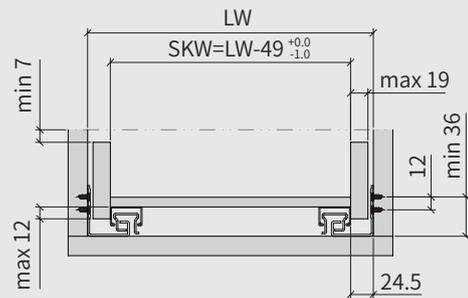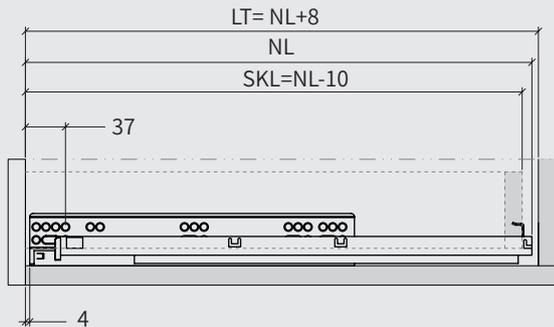

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

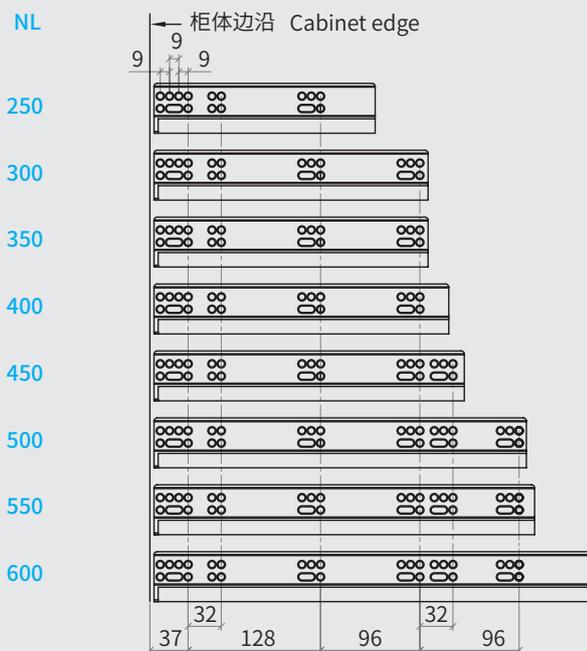

### 抽屉钻孔尺寸 (mm) drawer drill size

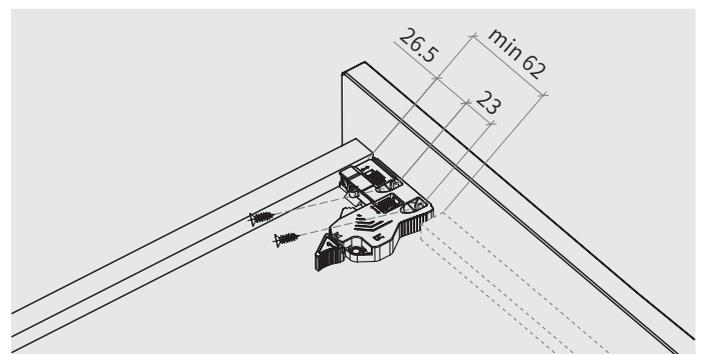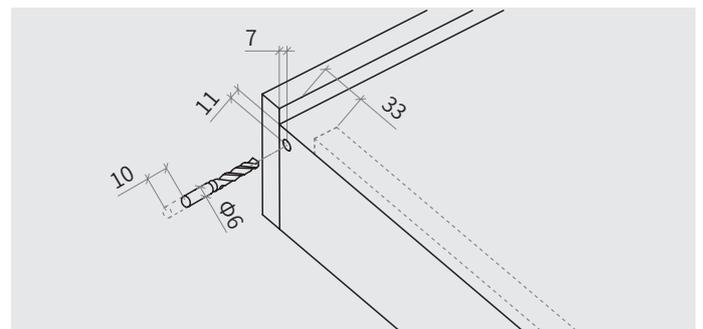

# CTH-A

## 16mm & 19mm

系列三节普通阻尼隐藏滑轨配插销 (足尺)  
FULL EXTENSION CONCEALED DRAWER SLIDES  
WITH PIN (FULL SIZE)



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

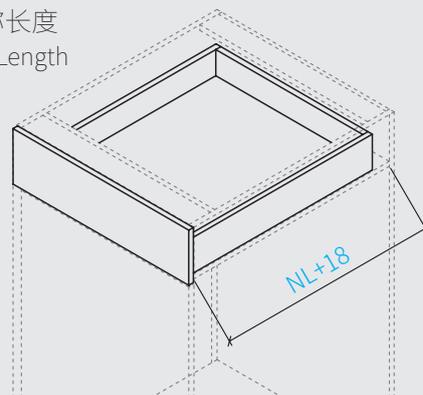

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通阻尼隐藏滑轨 (配插销) 左 / 右

FULL EXTENSION CONCEALED DRAWER SLIDES  
(WITH PIN) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	CTH - A (16) - 250	250 mm	CTH - A (19) - 250
300 mm	CTH - A (16) - 300	300 mm	CTH - A (19) - 300
350 mm	CTH - A (16) - 350	350 mm	CTH - A (19) - 350
400 mm	CTH - A (16) - 400	400 mm	CTH - A (19) - 400
450 mm	CTH - A (16) - 450	450 mm	CTH - A (19) - 450
500 mm	CTH - A (16) - 500	500 mm	CTH - A (19) - 500
550 mm	CTH - A (16) - 550	550 mm	CTH - A (19) - 550
600 mm	CTH - A (16) - 600	600 mm	CTH - A (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

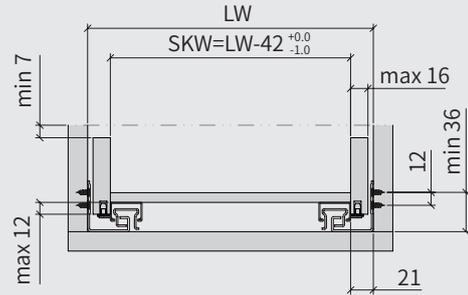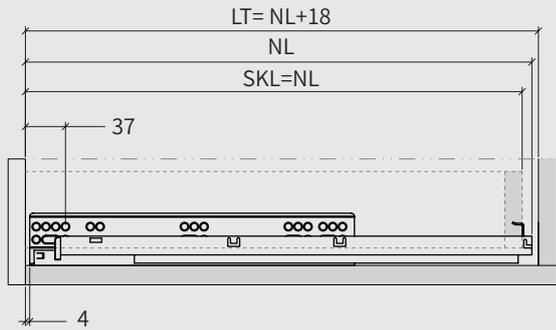

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

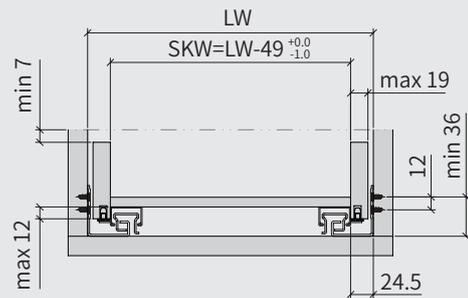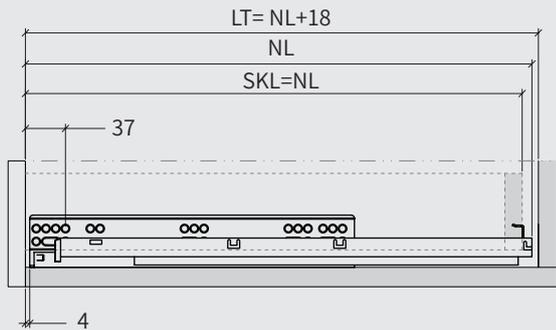

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

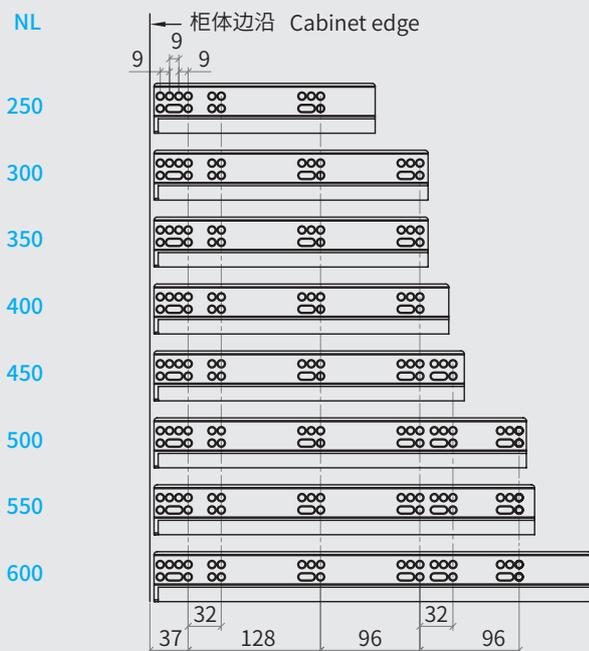

### 抽屉钻孔尺寸 (mm) drawer drill size

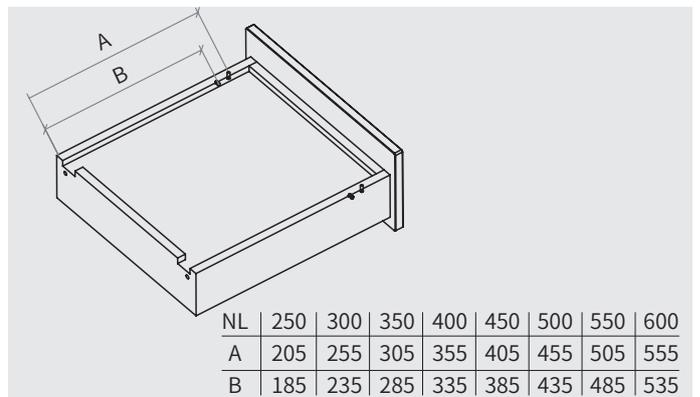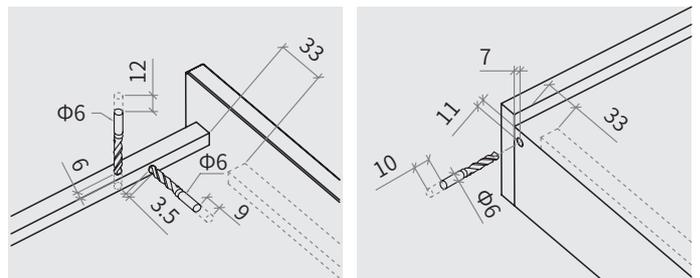

# MCTH-A

## 16mm & 19mm

系列三节普通阻尼隐藏滑轨配插销 (减尺)  
 FULL EXTENSION CONCEALED DRAWER SLIDES  
 WITH PIN (SHORTAGE SIZE)



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

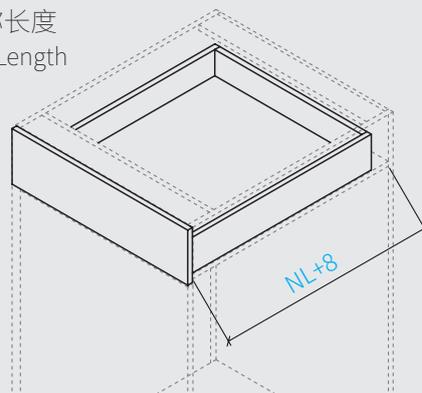

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通阻尼隐藏滑轨 (配插销) 左 / 右

FULL EXTENSION CONCEALED DRAWER SLIDES  
 (WITH PIN) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MCTH - A (16) - 250	250 mm	MCTH - A (19) - 250
300 mm	MCTH - A (16) - 300	300 mm	MCTH - A (19) - 300
350 mm	MCTH - A (16) - 350	350 mm	MCTH - A (19) - 350
400 mm	MCTH - A (16) - 400	400 mm	MCTH - A (19) - 400
450 mm	MCTH - A (16) - 450	450 mm	MCTH - A (19) - 450
500 mm	MCTH - A (16) - 500	500 mm	MCTH - A (19) - 500
550 mm	MCTH - A (16) - 550	550 mm	MCTH - A (19) - 550
600 mm	MCTH - A (16) - 600	600 mm	MCTH - A (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

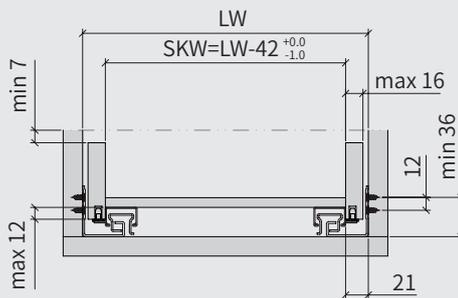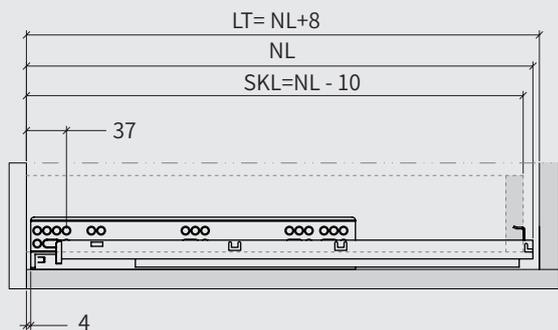

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

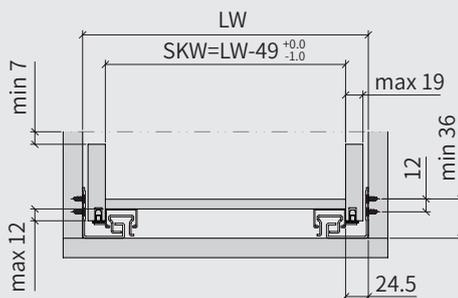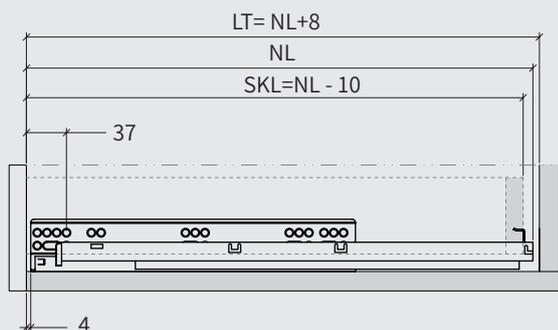

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

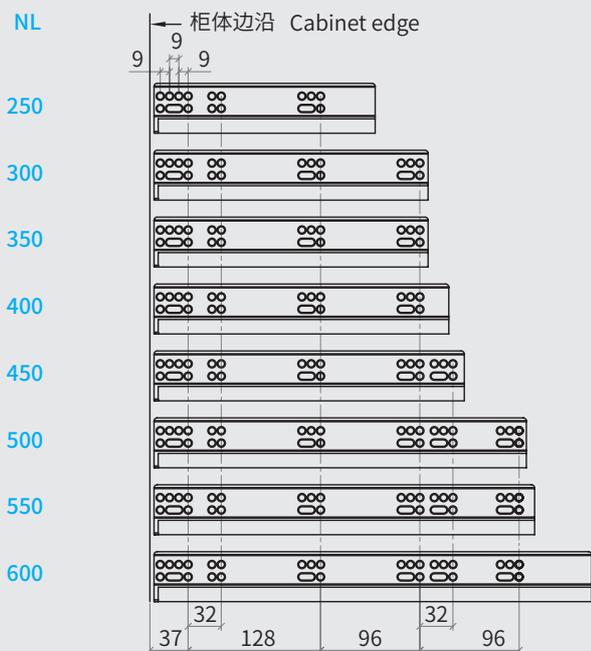


### 抽屉钻孔尺寸 (mm) drawer drill size

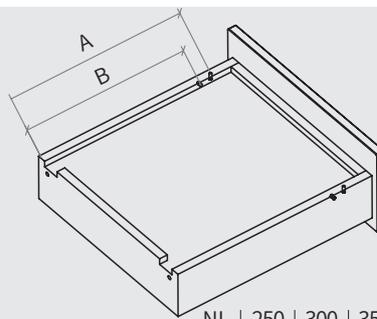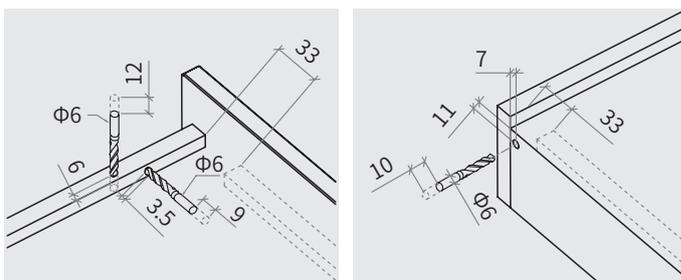

NL	250	300	350	400	450	500	550	600
A	190	245	270	305	330	355	390	415
B	200.5	255.5	280.5	319.5	369.5	419.5	469.5	519.5

# FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES

## 三节同步反弹隐藏滑轨

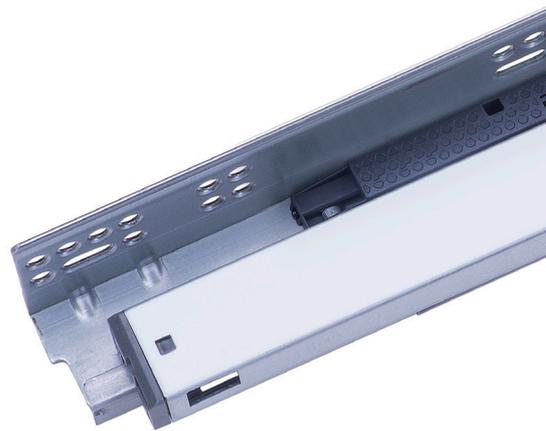

家乐斯

HOUSEHOLD HARDWARE  
PRODUCT MANUAL



EN



配合金把手



配插销



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

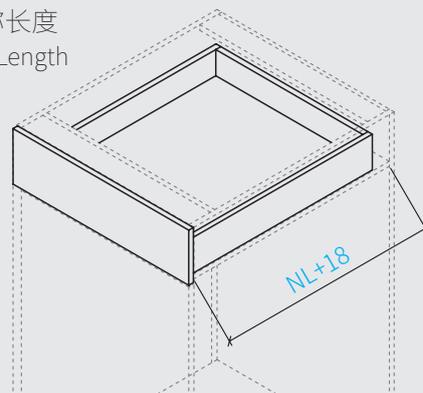

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步反弹隐藏滑轨 (配二维把手) 左 / 右

FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
(WITH 2D HANDLE) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	AJR - A (16) - 300	300 mm	AJR - A (19) - 300
350 mm	AJR - A (16) - 350	350 mm	AJR - A (19) - 350
400 mm	AJR - A (16) - 400	400 mm	AJR - A (19) - 400
450 mm	AJR - A (16) - 450	450 mm	AJR - A (19) - 450
500 mm	AJR - A (16) - 500	500 mm	AJR - A (19) - 500
550 mm	AJR - A (16) - 550	550 mm	AJR - A (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

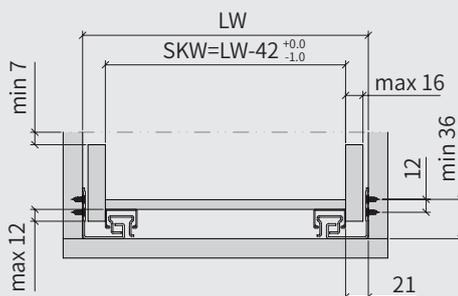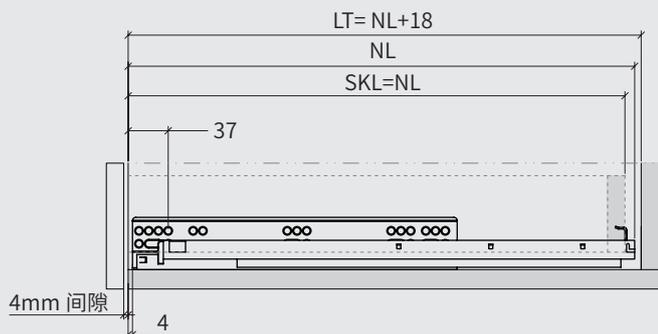

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

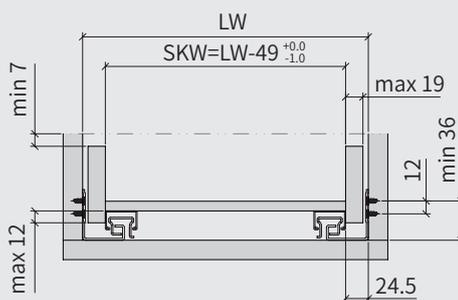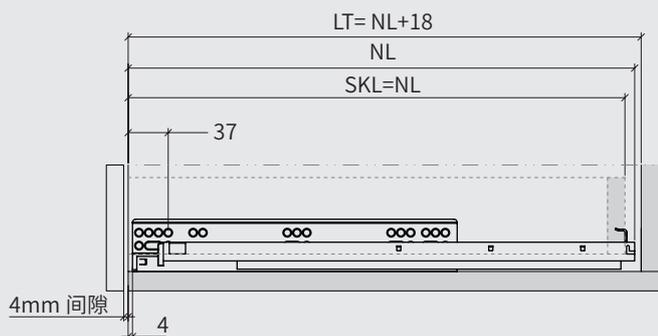

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

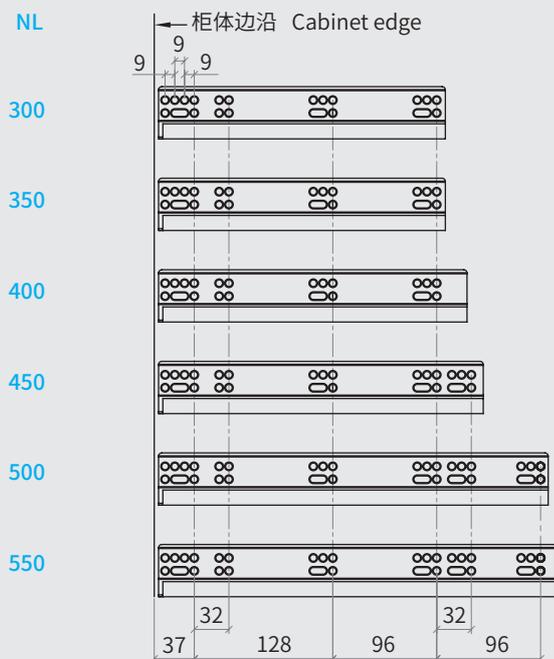

### 抽屉钻孔尺寸 (mm) drawer drill size

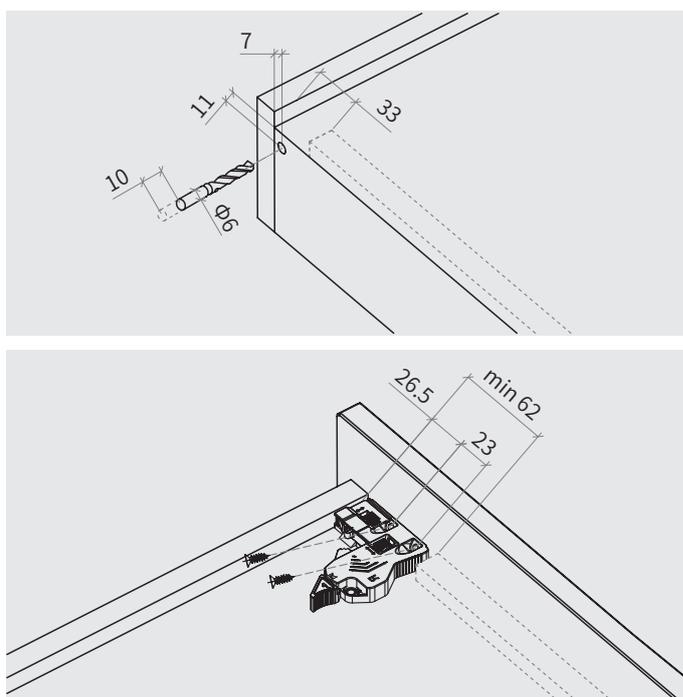

# MAJR-A

## 16mm & 19mm

系列三节同步反弹隐藏滑轨配二维把手 (减尺)  
FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
WITH 2D HANDLE (SHORTAGE SIZE)



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

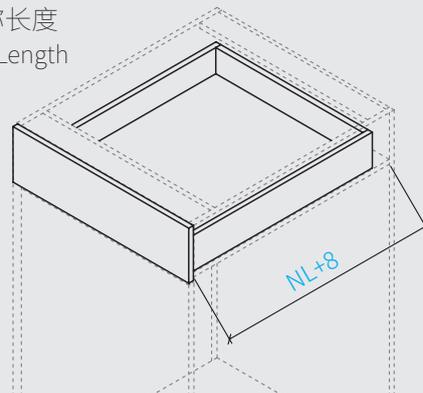

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步反弹隐藏滑轨 (配二维把手) 左 / 右

FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
(WITH 2D HANDLE) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	MAJR - A (16) - 300	300 mm	MAJR - A (19) - 300
350 mm	MAJR - A (16) - 350	350 mm	MAJR - A (19) - 350
400 mm	MAJR - A (16) - 400	400 mm	MAJR - A (19) - 400
450 mm	MAJR - A (16) - 450	450 mm	MAJR - A (19) - 450
500 mm	MAJR - A (16) - 500	500 mm	MAJR - A (19) - 500
550 mm	MAJR - A (16) - 550	550 mm	MAJR - A (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

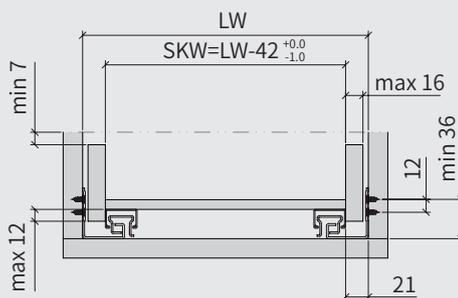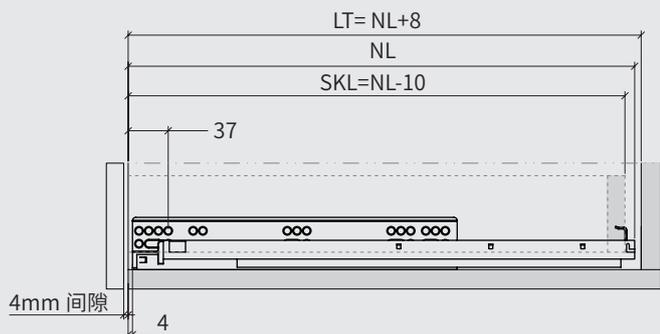

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

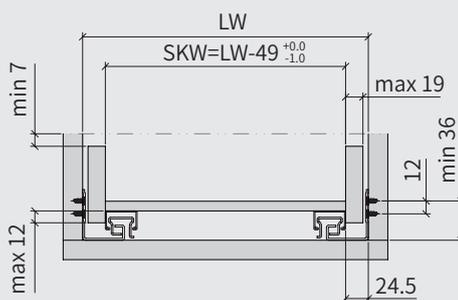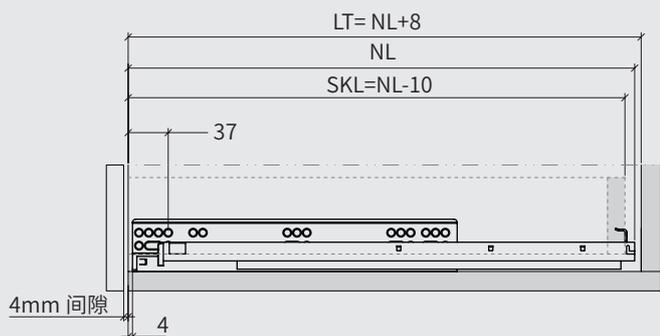

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

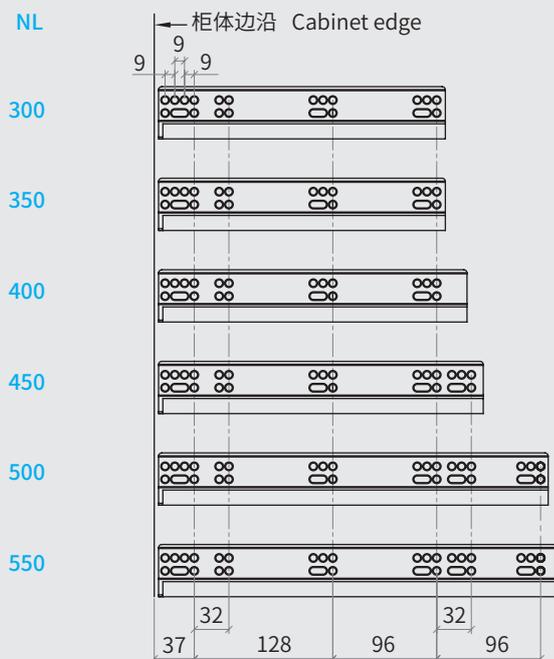

### 抽屉钻孔尺寸 (mm) drawer drill size

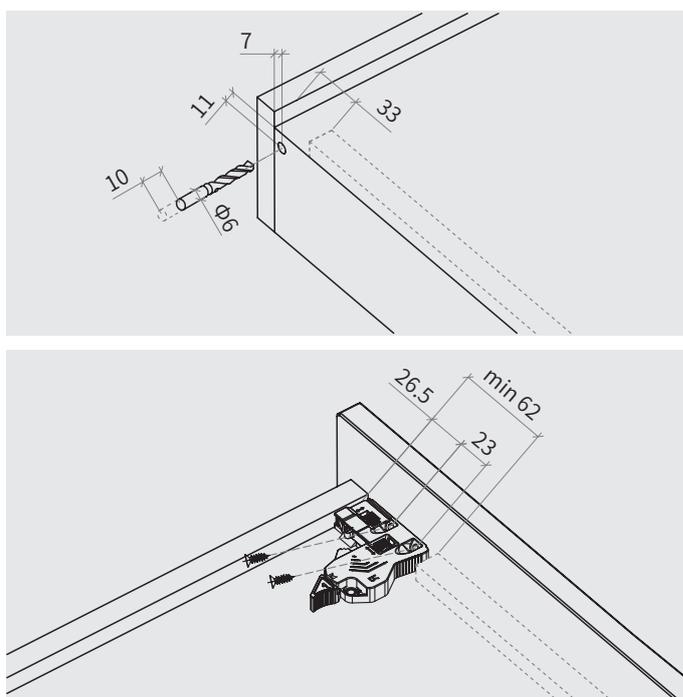

# AJR-B

## 16mm & 19mm

系列三节同步反弹隐藏滑轨配一维把手 (足尺)  
FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
WITH 1D HANDLE ( FULL SIZE)



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

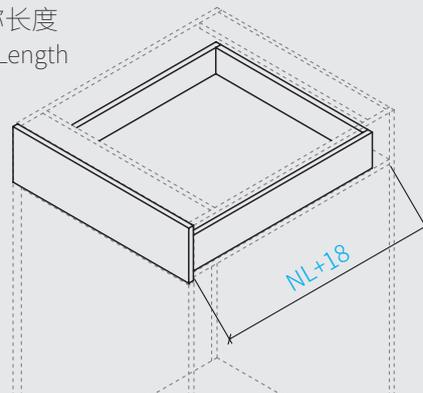

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步反弹隐藏滑轨 (配一维把手) 左 / 右

FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
(WITH 1D HANDLE) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	AJR - B (16) - 300	300 mm	AJR - B (19) - 300
350 mm	AJR - B (16) - 350	350 mm	AJR - B (19) - 350
400 mm	AJR - B (16) - 400	400 mm	AJR - B (19) - 400
450 mm	AJR - B (16) - 450	450 mm	AJR - B (19) - 450
500 mm	AJR - B (16) - 500	500 mm	AJR - B (19) - 500
550 mm	AJR - B (16) - 550	550 mm	AJR - B (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

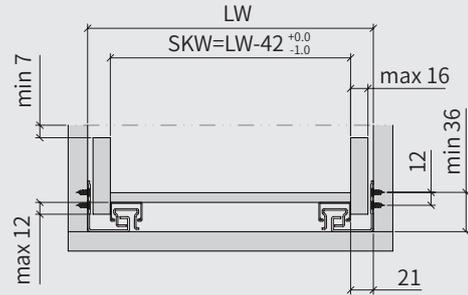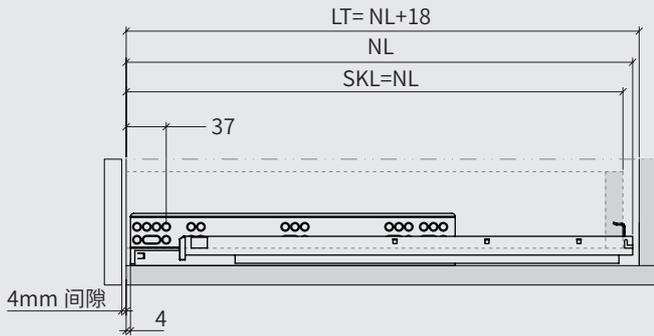

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

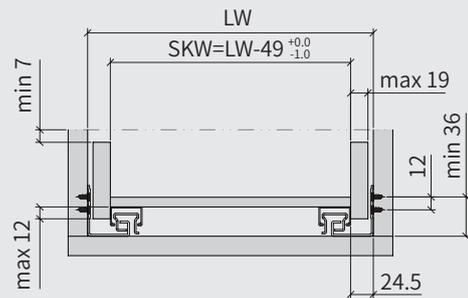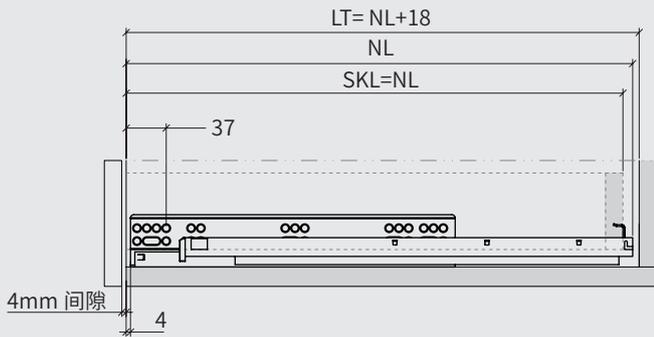

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

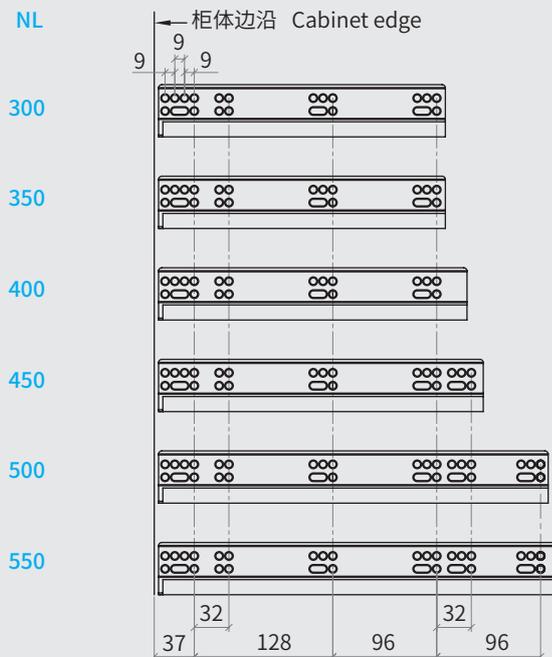

### 抽屉钻孔尺寸 (mm) drawer drill size

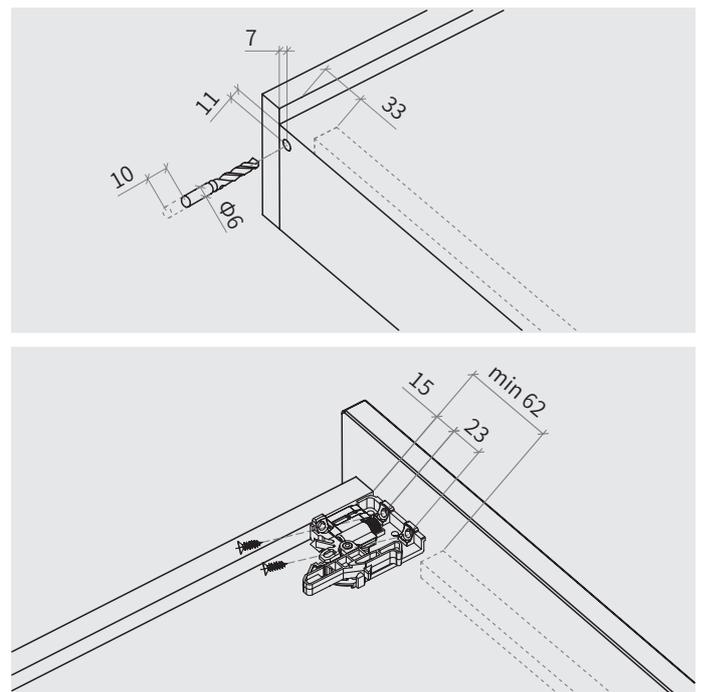

# MAJR-B

## 16mm & 19mm

系列三节同步反弹隐藏滑轨配一维把手 (减尺)  
FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
WITH 1D HANDLE ( FULL SIZE)



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

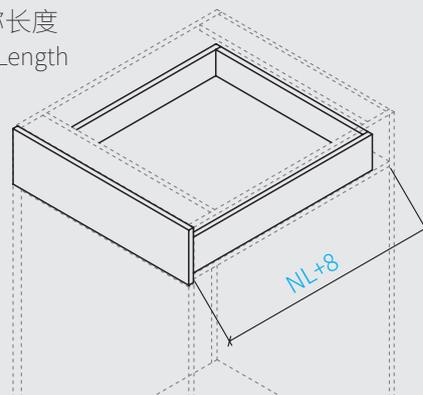

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步反弹隐藏滑轨 (配一维把手) 左 / 右

FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
(WITH 1D HANDLE) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	MAJR - B (16) - 300	300 mm	MAJR - B (19) - 300
350 mm	MAJR - B (16) - 350	350 mm	MAJR - B (19) - 350
400 mm	MAJR - B (16) - 400	400 mm	MAJR - B (19) - 400
450 mm	MAJR - B (16) - 450	450 mm	MAJR - B (19) - 450
500 mm	MAJR - B (16) - 500	500 mm	MAJR - B (19) - 500
550 mm	MAJR - B (16) - 550	550 mm	MAJR - B (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

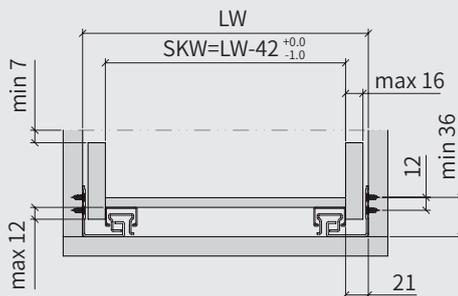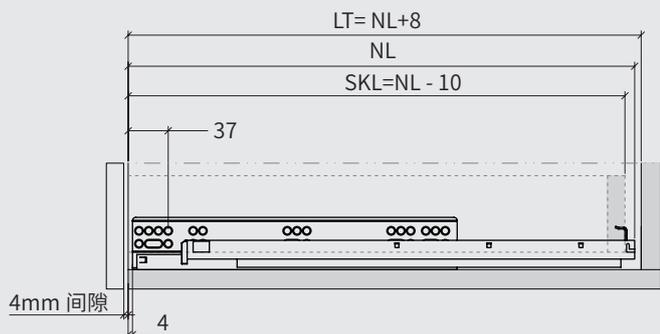

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

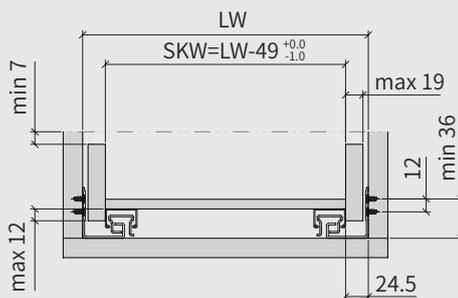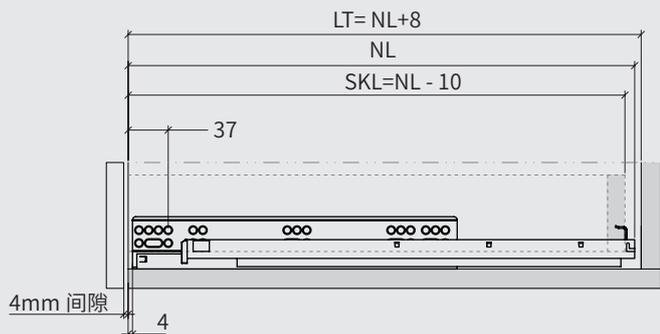

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

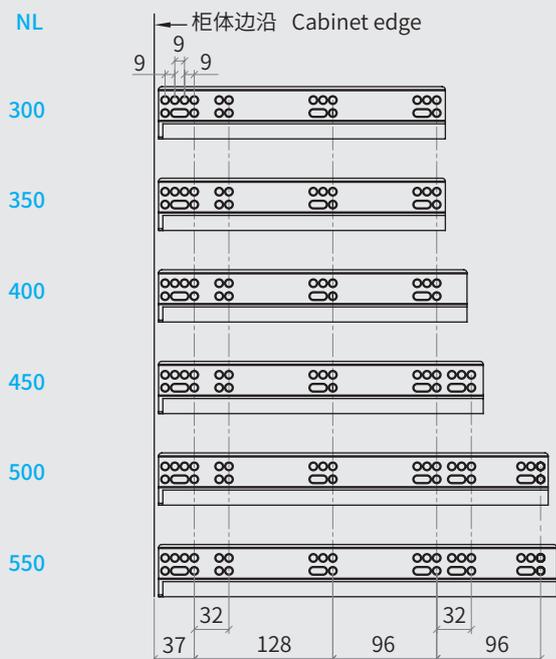

### 抽屉钻孔尺寸 (mm) drawer drill size

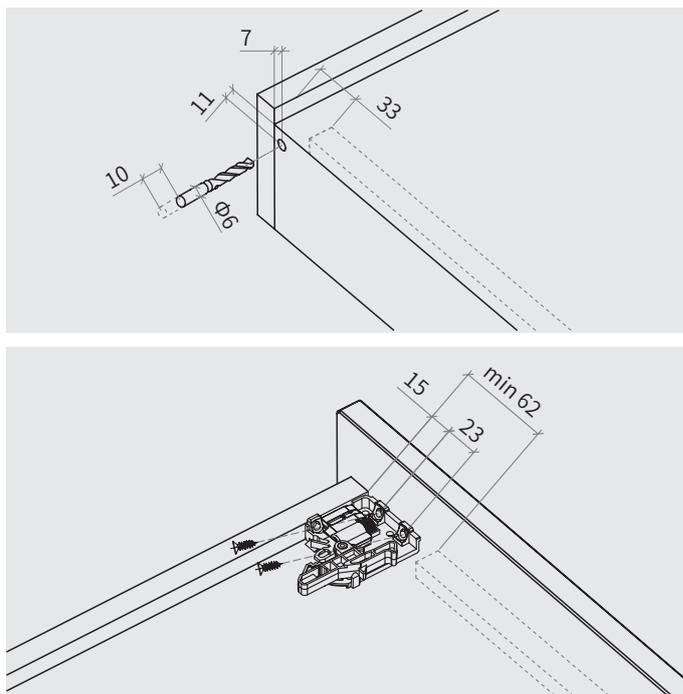



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

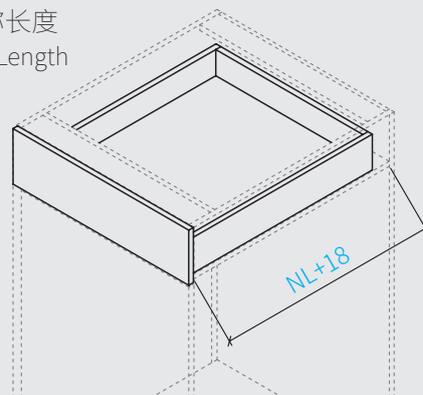

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步反弹隐藏滑轨 (配合金把手) 左 / 右

FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
(WITH METAL HANDLE) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	AJR - C (16) - 300	300 mm	AJR - C (19) - 300
350 mm	AJR - C (16) - 350	350 mm	AJR - C (19) - 350
400 mm	AJR - C (16) - 400	400 mm	AJR - C (19) - 400
450 mm	AJR - C (16) - 450	450 mm	AJR - C (19) - 450
500 mm	AJR - C (16) - 500	500 mm	AJR - C (19) - 500
550 mm	AJR - C (16) - 550	550 mm	AJR - C (19) - 550



16mm 柜体安装所需空间 Space Requirement

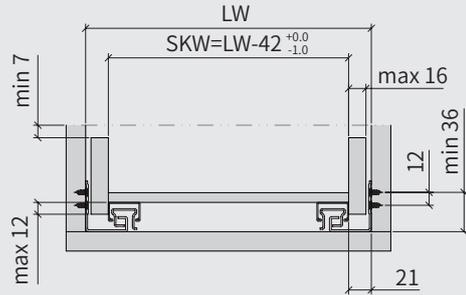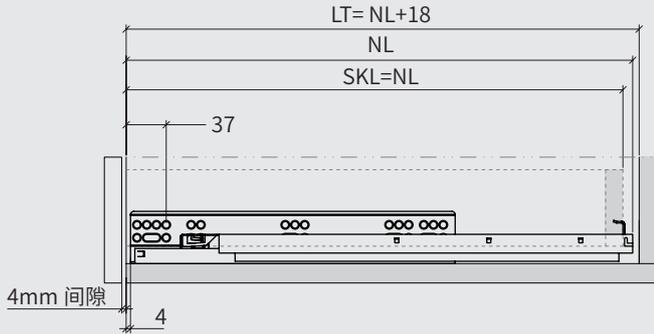

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



19mm 柜体安装所需空间 Space Requirement

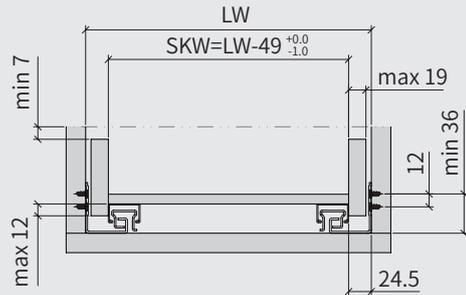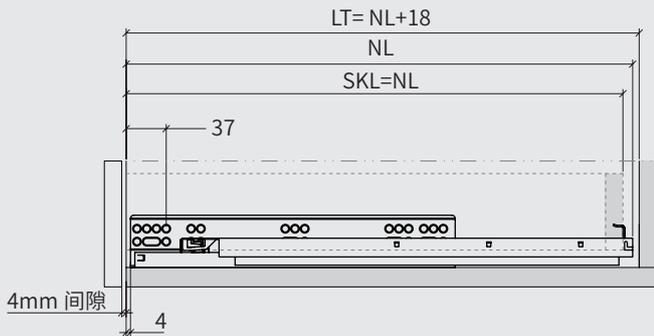

滑轨安装孔尺寸 (mm) Slide rail mounting hole size

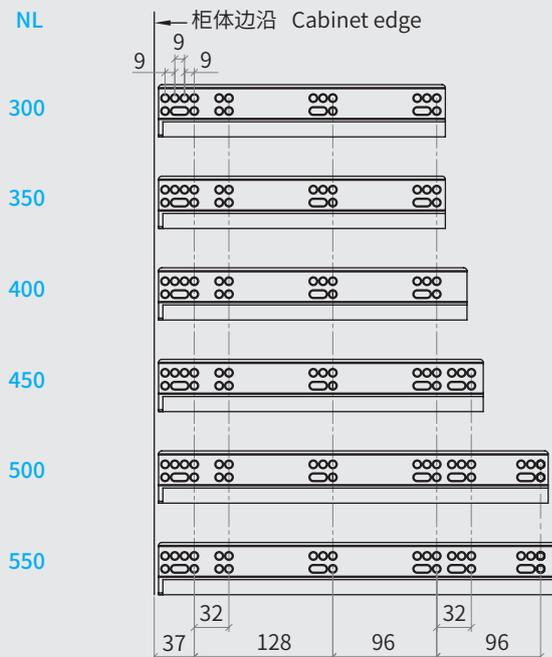

抽屉钻孔尺寸 (mm) drawer drill size

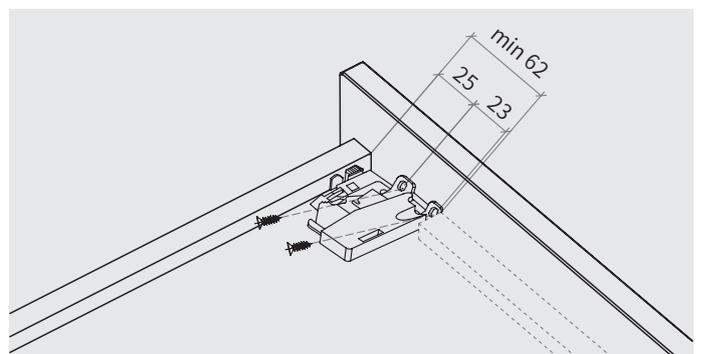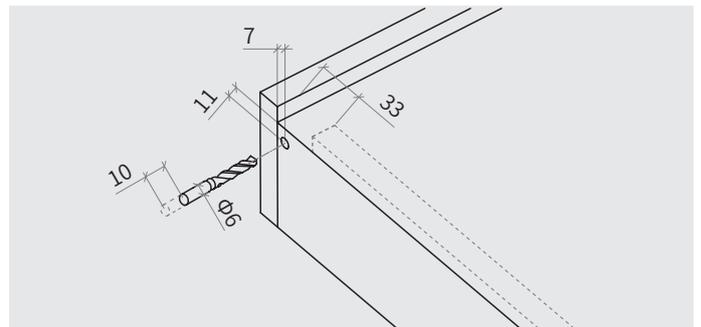

# MAJR-C

## 16mm & 19mm

系列三节同步反弹隐藏滑轨配合金把手 (减尺)  
FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
WITH METAL HANDLE (SHORTAGE SIZE)



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

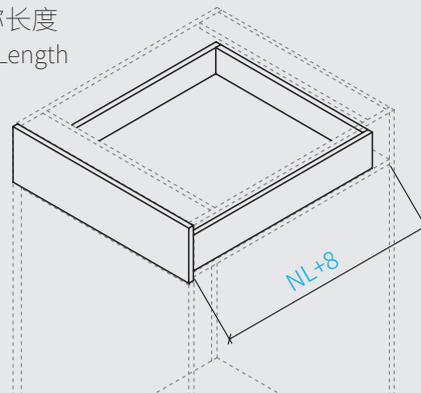

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步反弹隐藏滑轨 (配合金把手) 左 / 右

FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
(WITH METAL HANDLE) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	MAJR - C (16) - 300	300 mm	MAJR - C (19) - 300
350 mm	MAJR - C (16) - 350	350 mm	MAJR - C (19) - 350
400 mm	MAJR - C (16) - 400	400 mm	MAJR - C (19) - 400
450 mm	MAJR - C (16) - 450	450 mm	MAJR - C (19) - 450
500 mm	MAJR - C (16) - 500	500 mm	MAJR - C (19) - 500
550 mm	MAJR - C (16) - 550	550 mm	MAJR - C (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

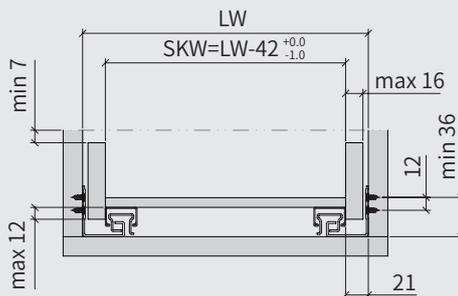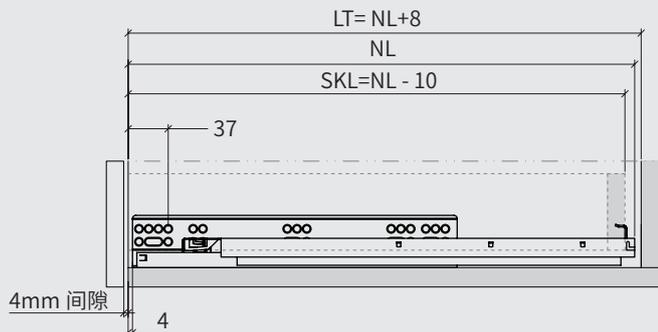

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

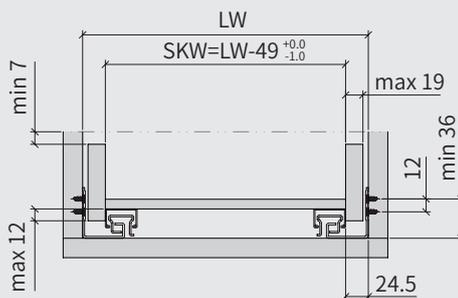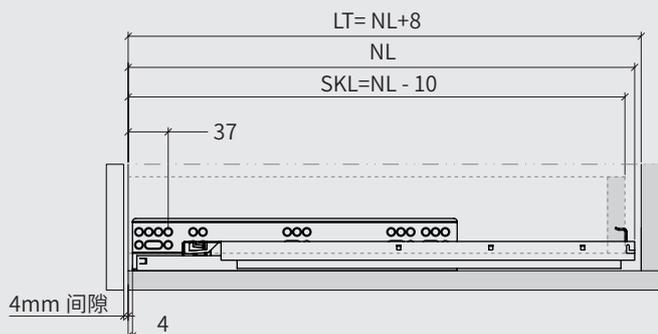

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

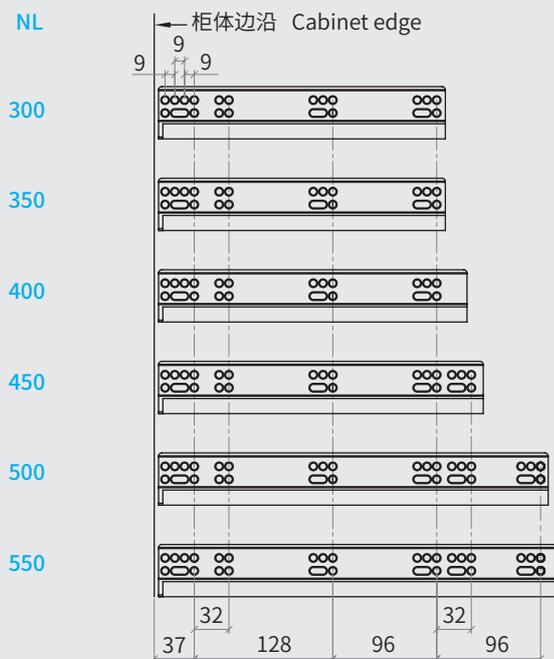

### 抽屉钻孔尺寸 (mm) drawer drill size

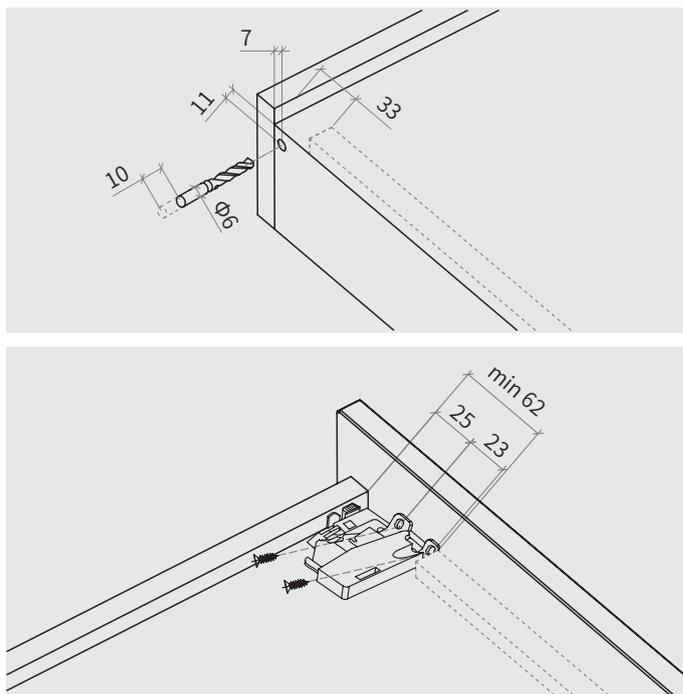

# ATR-A

## 16mm & 19mm

系列三节同步反弹隐藏滑轨配插销 (足尺)  
FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
WITH PIN (FULL SIZE)



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

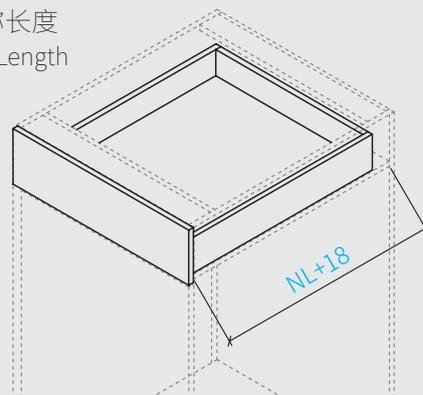

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步反弹隐藏滑轨 (配插销) 左 / 右

FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
(WITH PIN) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	ATR - A (16) - 300	300 mm	ATR - A (19) - 300
350 mm	ATR - A (16) - 350	350 mm	ATR - A (19) - 350
400 mm	ATR - A (16) - 400	400 mm	ATR - A (19) - 400
450 mm	ATR - A (16) - 450	450 mm	ATR - A (19) - 450
500 mm	ATR - A (16) - 500	500 mm	ATR - A (19) - 500
550 mm	ATR - A (16) - 550	550 mm	ATR - A (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

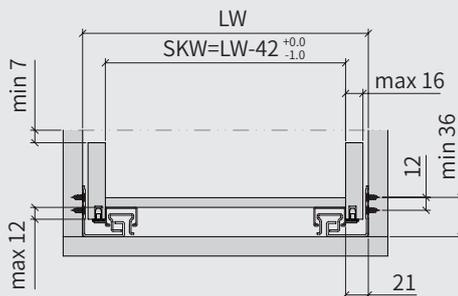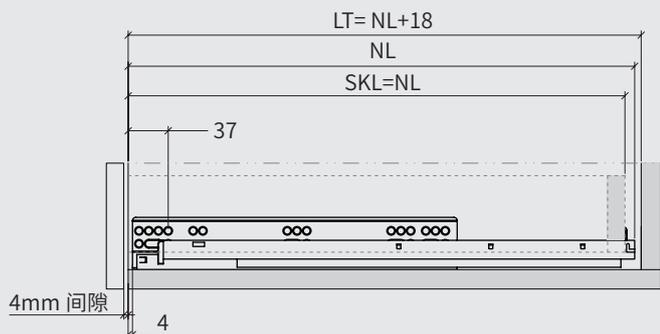

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

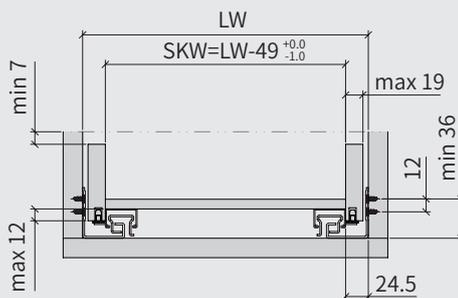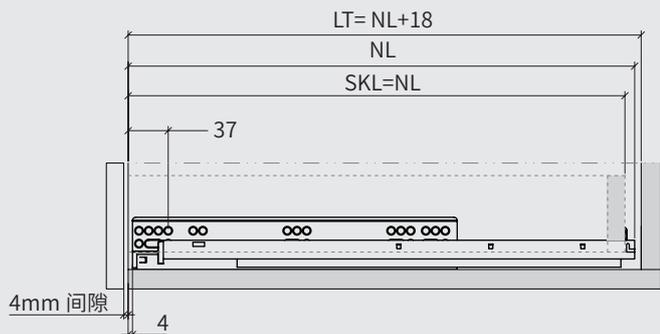

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

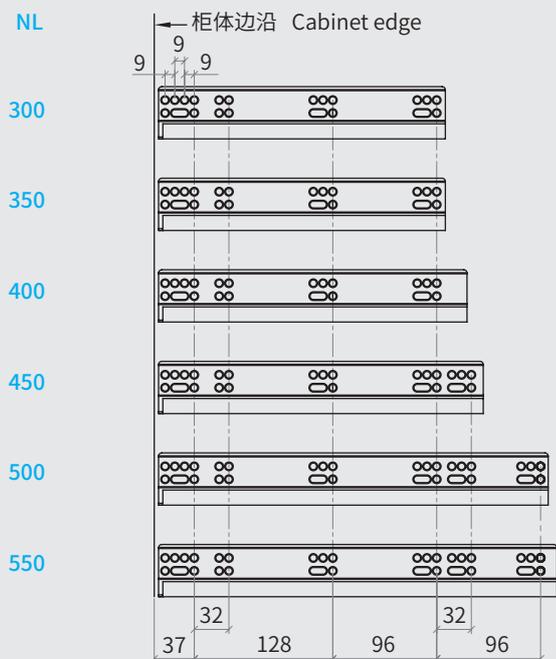

### 抽屉钻孔尺寸 (mm) drawer drill size

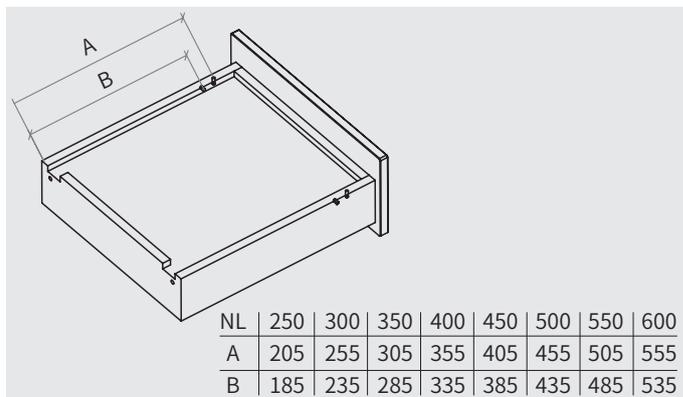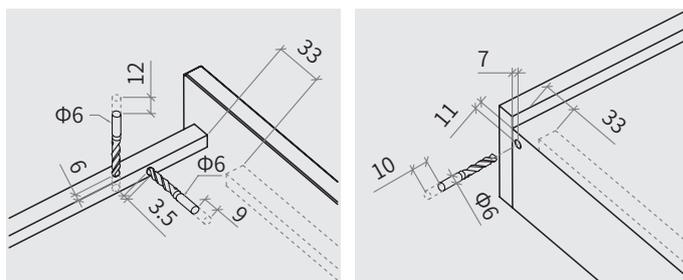

# MATR-A

## 16mm & 19mm

系列三节同步反弹隐藏滑轨配插销 (减尺)  
FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
WITH PIN (SHORTAGE SIZE)



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

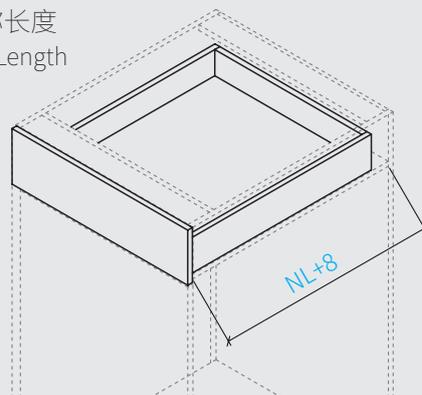

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步反弹隐藏滑轨 (配插销) 左 / 右

FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
(WITH PIN) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	MATR - A (16) - 300	300 mm	MATR - A (19) - 300
350 mm	MATR - A (16) - 350	350 mm	MATR - A (19) - 350
400 mm	MATR - A (16) - 400	400 mm	MATR - A (19) - 400
450 mm	MATR - A (16) - 450	450 mm	MATR - A (19) - 450
500 mm	MATR - A (16) - 500	500 mm	MATR - A (19) - 500
550 mm	MATR - A (16) - 550	550 mm	MATR - A (19) - 550



### 16mm 柜体安装所需空间 Space Requirement

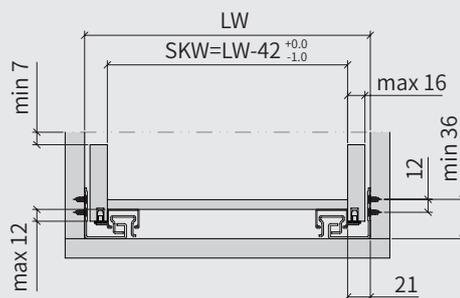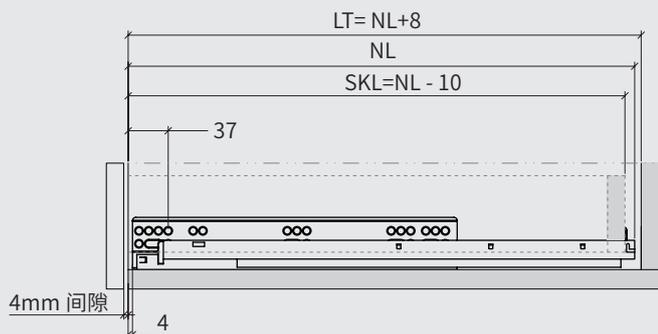

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

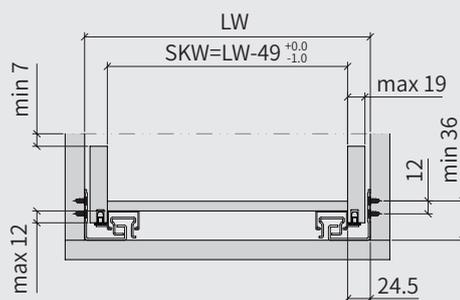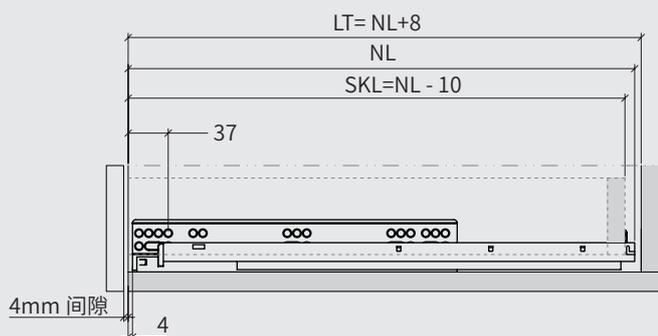

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

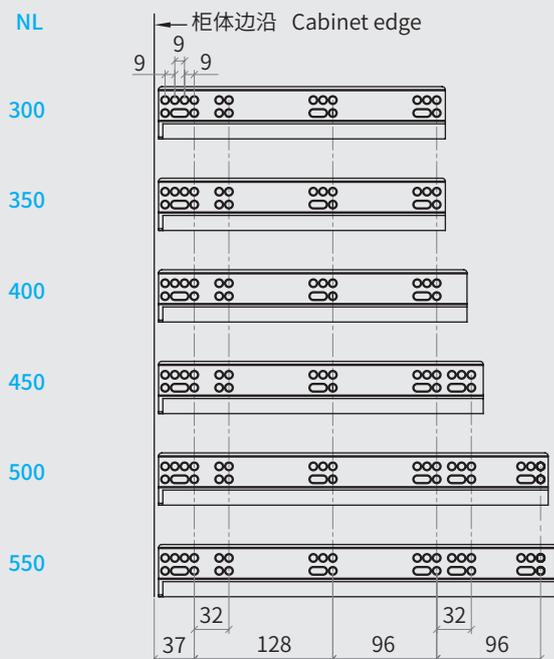

### 抽屉钻孔尺寸 (mm) drawer drill size

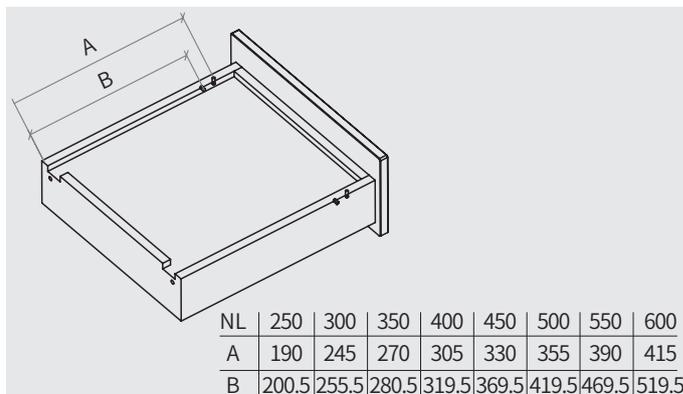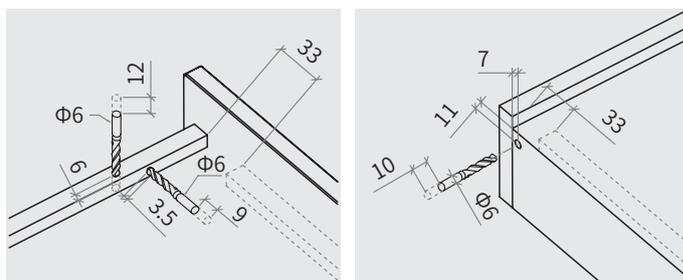


# FULL EXTENSION PUSH OPEN DRAWER SLIDES

## 三节普通反弹隐藏滑轨



家乐斯

HOUSEHOLD HARDWARE  
PRODUCT MANUAL

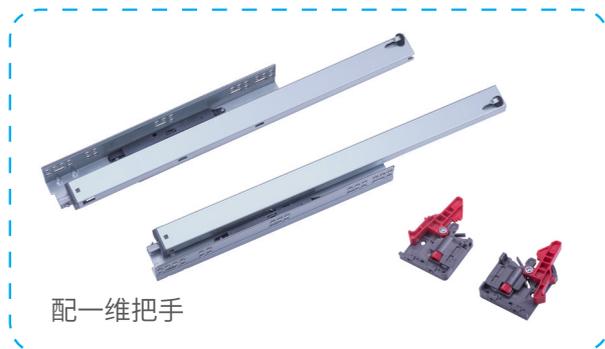



配合金把手



配插销



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

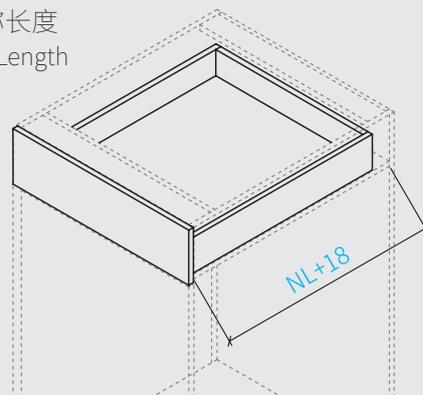

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通反弹隐藏滑轨 (配二维把手) 左 / 右

FULL EXTENSION PUSH OPEN DRAWER SLIDES  
 (WITH 2D HANDLE) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	CJR - A (16) - 250	250 mm	CJR - A (19) - 250
300 mm	CJR - A (16) - 300	300 mm	CJR - A (19) - 300
350 mm	CJR - A (16) - 350	350 mm	CJR - A (19) - 350
400 mm	CJR - A (16) - 400	400 mm	CJR - A (19) - 400
450 mm	CJR - A (16) - 450	450 mm	CJR - A (19) - 450
500 mm	CJR - A (16) - 500	500 mm	CJR - A (19) - 500
550 mm	CJR - A (16) - 550	550 mm	CJR - A (19) - 550
600 mm	CJR - A (16) - 600	600 mm	CJR - A (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

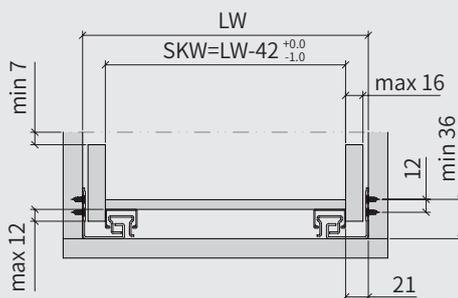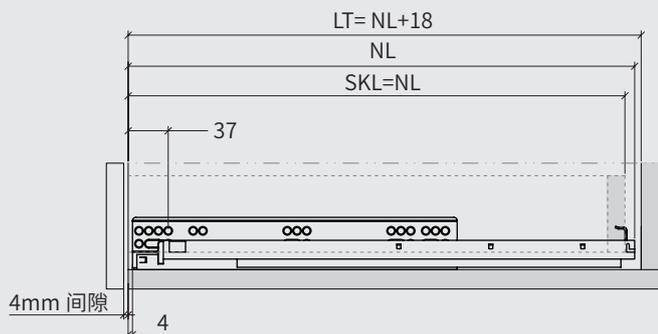

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

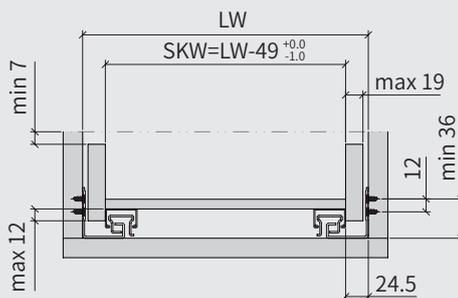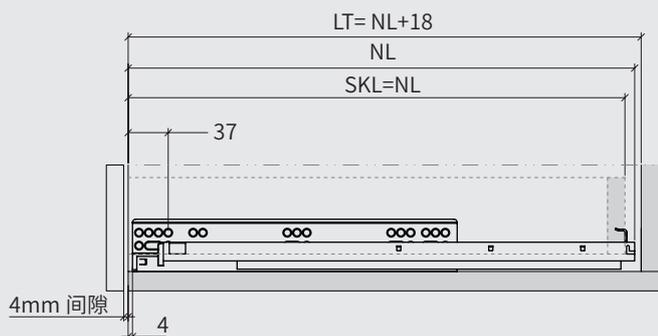

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

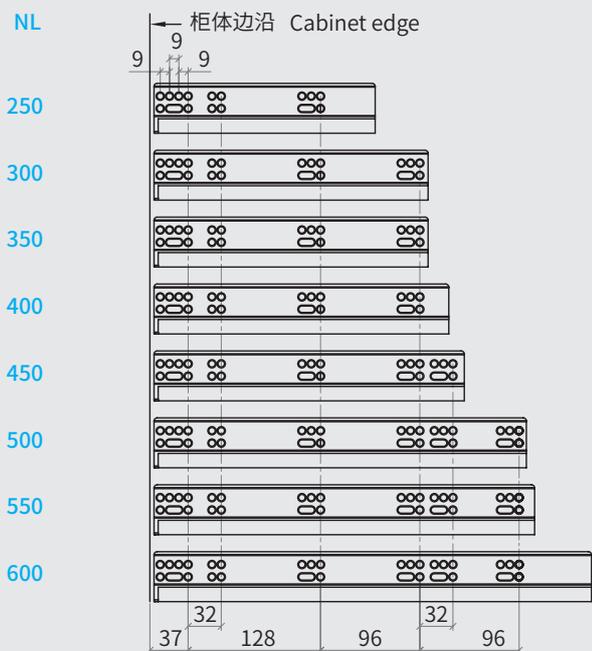

### 抽屉钻孔尺寸 (mm) drawer drill size

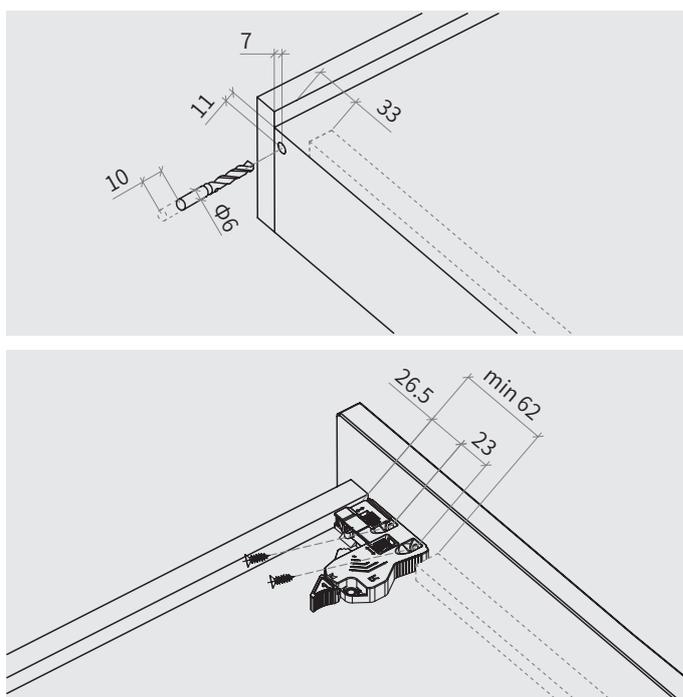

# MCJR-A

## 16mm & 19mm

系列三节普通反弹隐藏滑轨配二维把手 (减尺)  
FULL EXTENSION PUSH OPEN DRAWER SLIDES  
WITH 2D HANDLE (SHORTAGE SIZE)



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

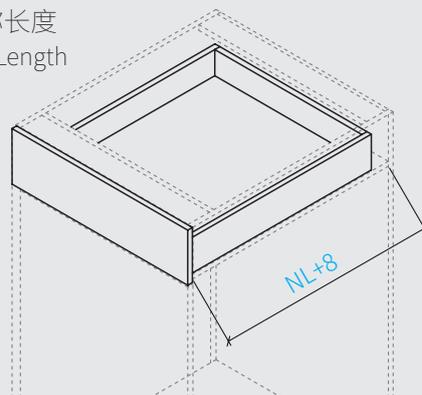

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通反弹隐藏滑轨 (配二维把手) 左 / 右

FULL EXTENSION PUSH OPEN DRAWER SLIDES  
(WITH 2D HANDLE) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MCJR - A (16) - 250	250 mm	MCJR - A (19) - 250
300 mm	MCJR - A (16) - 300	300 mm	MCJR - A (19) - 300
350 mm	MCJR - A (16) - 350	350 mm	MCJR - A (19) - 350
400 mm	MCJR - A (16) - 400	400 mm	MCJR - A (19) - 400
450 mm	MCJR - A (16) - 450	450 mm	MCJR - A (19) - 450
500 mm	MCJR - A (16) - 500	500 mm	MCJR - A (19) - 500
550 mm	MCJR - A (16) - 550	550 mm	MCJR - A (19) - 550
600 mm	MCJR - A (16) - 600	600 mm	MCJR - A (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

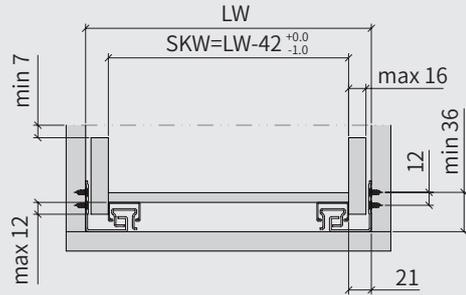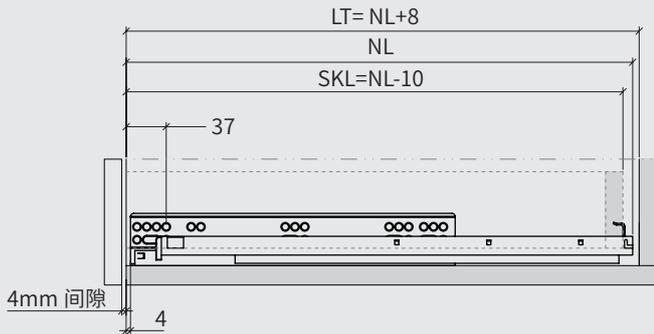

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

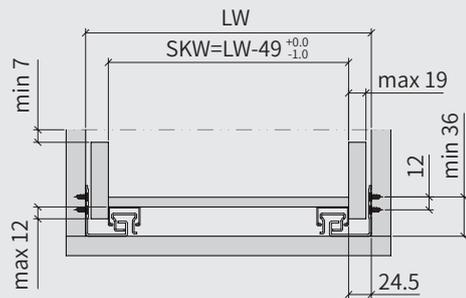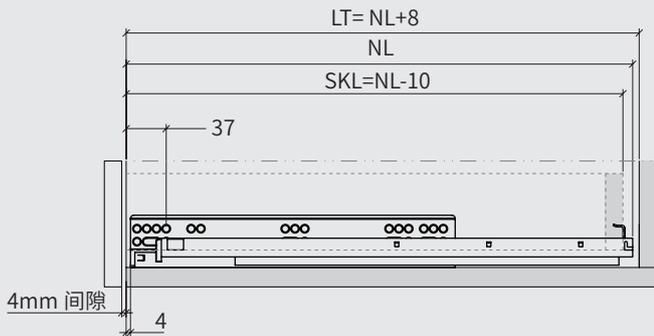

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

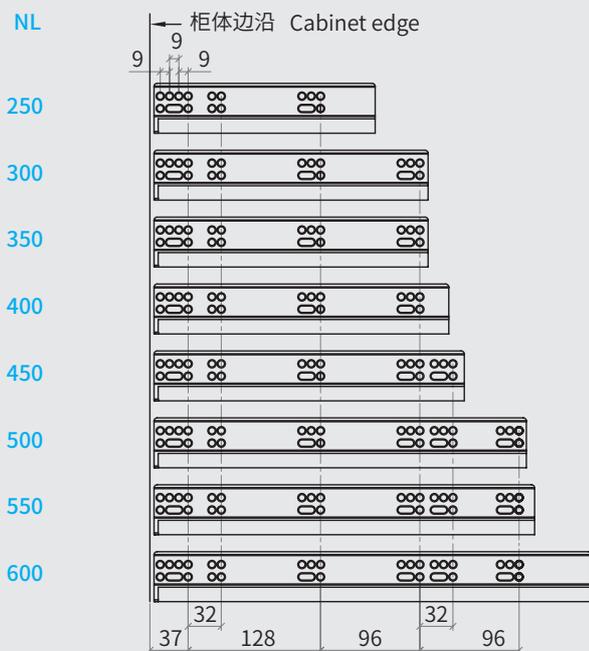

### 抽屉钻孔尺寸 (mm) drawer drill size

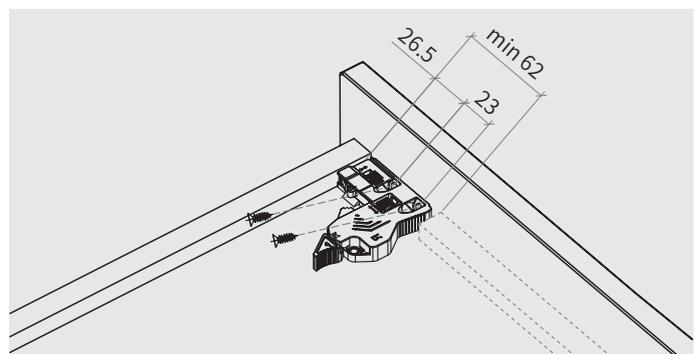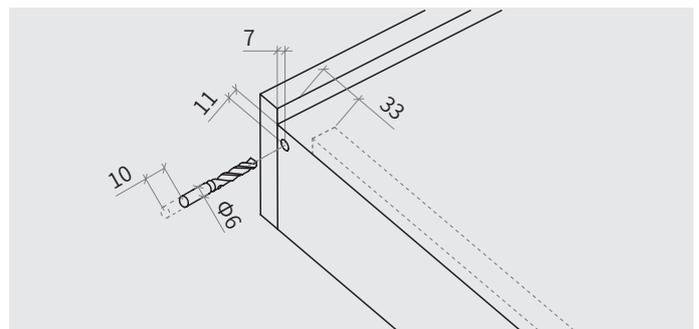

# CJR-B

## 16mm & 19mm

系列三节普通反弹隐藏滑轨配一维把手 (足尺)  
 FULL EXTENSION PUSH OPEN DRAWER SLIDES  
 WITH 1D HANDLE ( FULL SIZE)



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

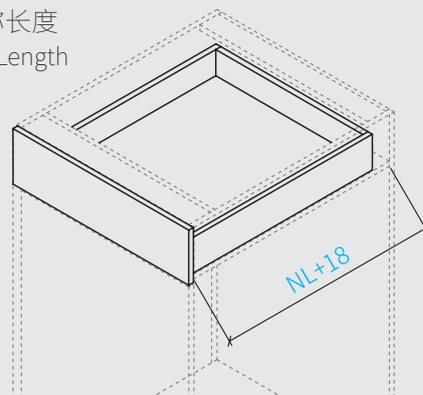

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通反弹隐藏滑轨 (配一维把手) 左 / 右

FULL EXTENSION PUSH OPEN DRAWER SLIDES  
 (WITH 1D HANDLE) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	CJR - B (16) - 250	250 mm	CJR - B (19) - 250
300 mm	CJR - B (16) - 300	300 mm	CJR - B (19) - 300
350 mm	CJR - B (16) - 350	350 mm	CJR - B (19) - 350
400 mm	CJR - B (16) - 400	400 mm	CJR - B (19) - 400
450 mm	CJR - B (16) - 450	450 mm	CJR - B (19) - 450
500 mm	CJR - B (16) - 500	500 mm	CJR - B (19) - 500
550 mm	CJR - B (16) - 550	550 mm	CJR - B (19) - 550
600 mm	CJR - B (16) - 600	600 mm	CJR - B (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

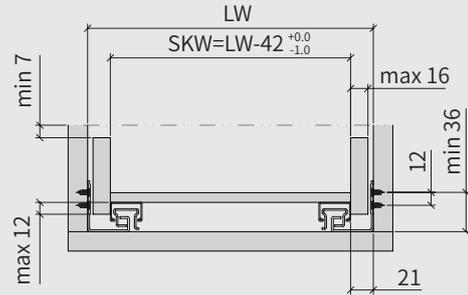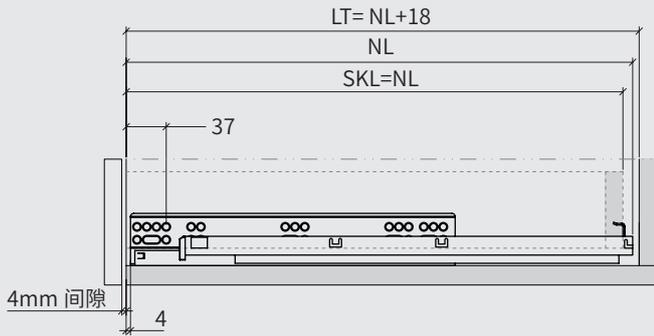

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

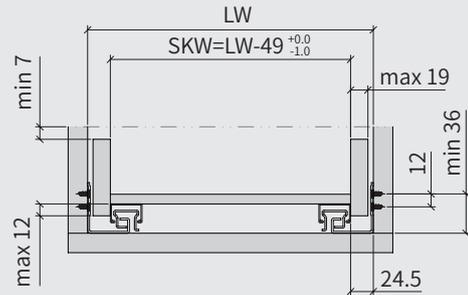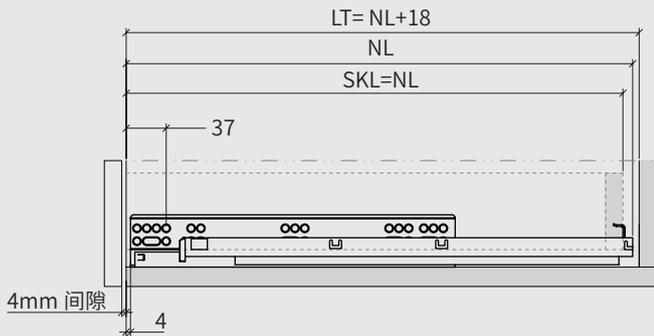

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

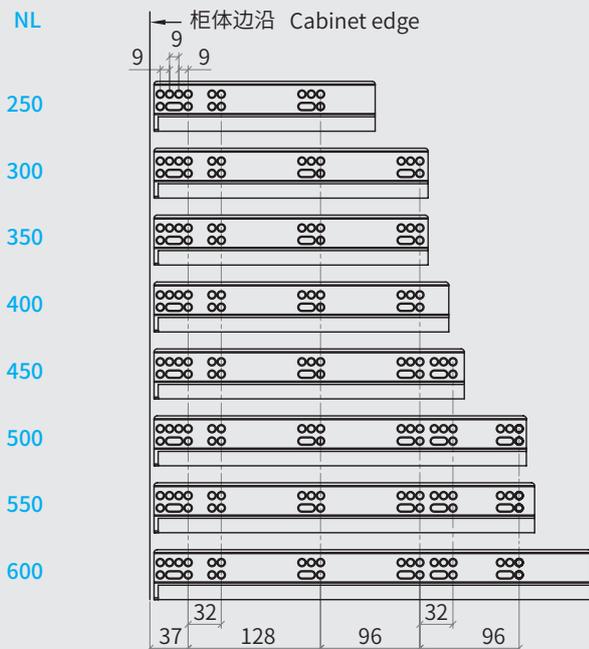

### 抽屉钻孔尺寸 (mm) drawer drill size

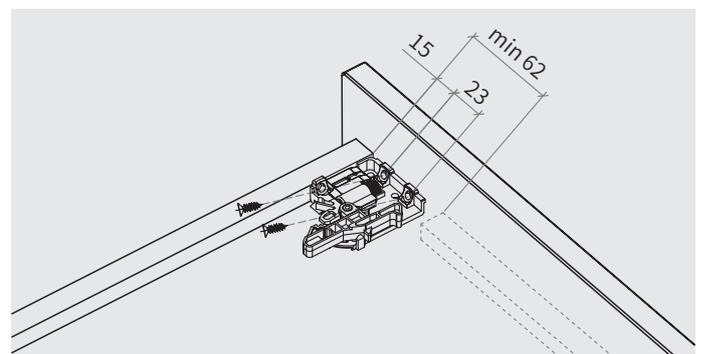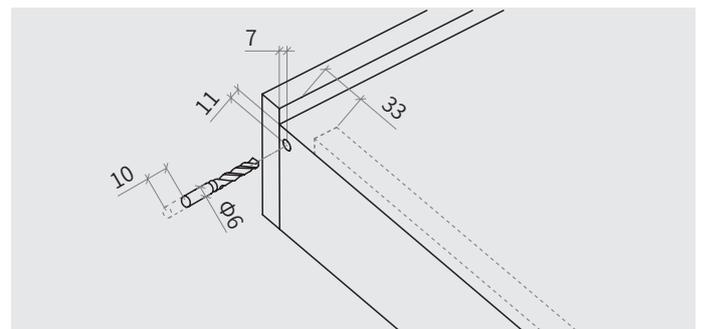

# MCJR-B

## 16mm & 19mm

系列三节普通反弹隐藏滑轨配一维把手 (减尺)  
 FULL EXTENSION PUSH OPEN DRAWER SLIDES  
 WITH 1D HANDLE (SHORTAGE SIZE)



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

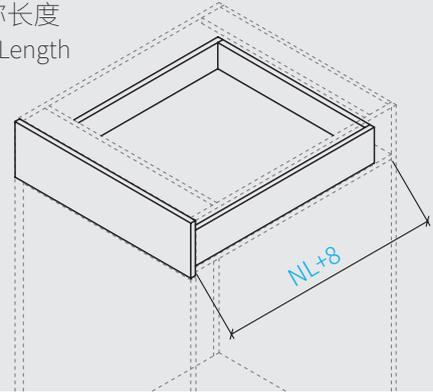

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通反弹隐藏滑轨 (配一维把手) 左 / 右

FULL EXTENSION PUSH OPEN DRAWER SLIDES  
 (WITH 1D HANDLE) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MCJR - B (16) - 250	250 mm	MCJR - B (19) - 250
300 mm	MCJR - B (16) - 300	300 mm	MCJR - B (19) - 300
350 mm	MCJR - B (16) - 350	350 mm	MCJR - B (19) - 350
400 mm	MCJR - B (16) - 400	400 mm	MCJR - B (19) - 400
450 mm	MCJR - B (16) - 450	450 mm	MCJR - B (19) - 450
500 mm	MCJR - B (16) - 500	500 mm	MCJR - B (19) - 500
550 mm	MCJR - B (16) - 550	550 mm	MCJR - B (19) - 550
600 mm	MCJR - B (16) - 600	600 mm	MCJR - B (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

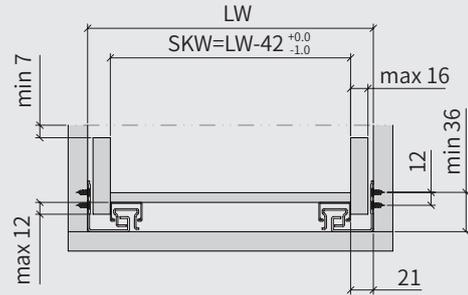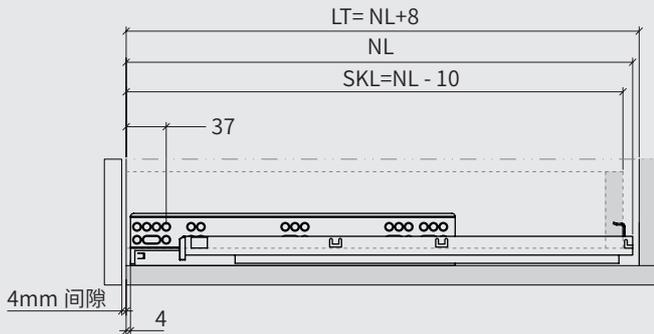

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

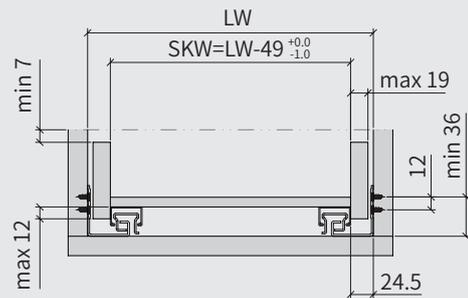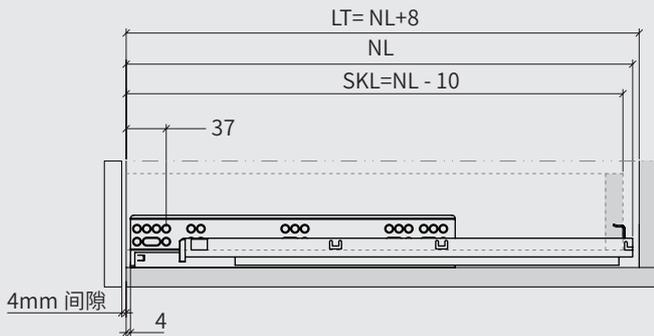

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

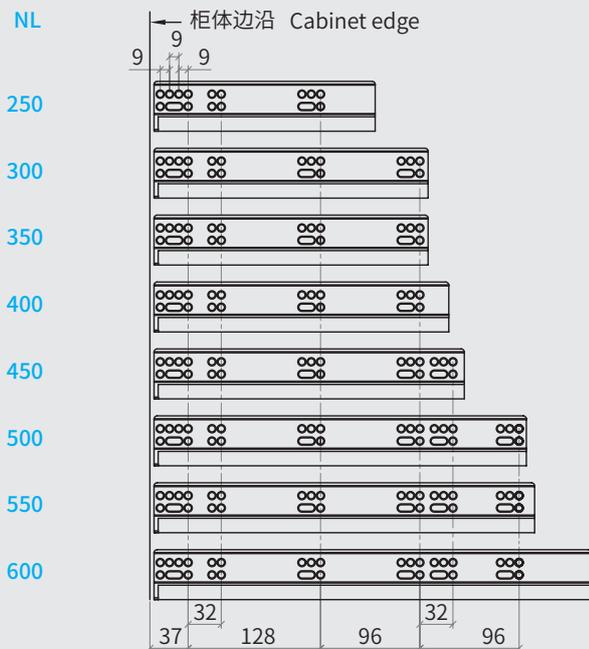

### 抽屉钻孔尺寸 (mm) drawer drill size

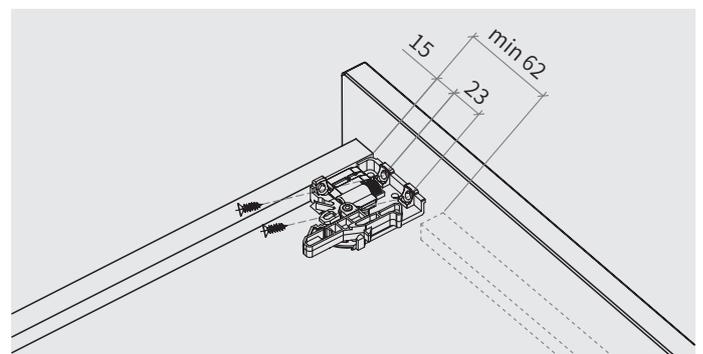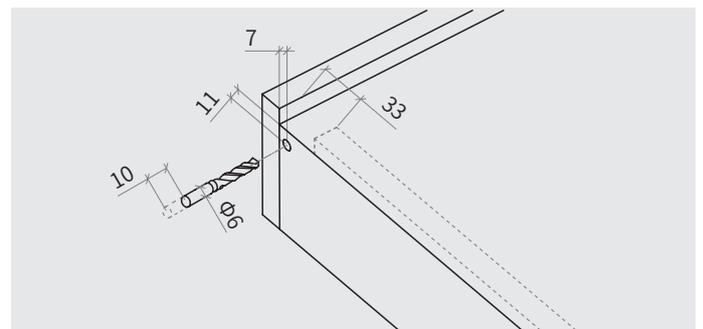



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

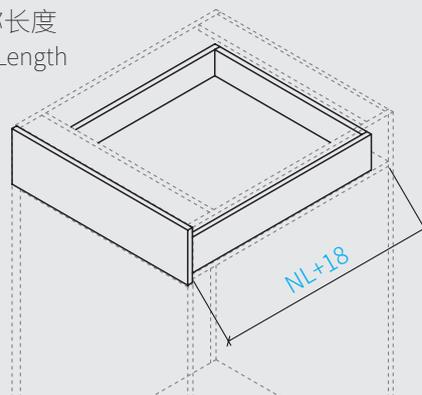

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通反弹隐藏滑轨 (配合金把手) 左 / 右

FULL EXTENSION PUSH OPEN DRAWER SLIDES  
 (WITH METAL HANDLE) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	CJR - C (16) - 250	250 mm	CJR - C (19) - 250
300 mm	CJR - C (16) - 300	300 mm	CJR - C (19) - 300
350 mm	CJR - C (16) - 350	350 mm	CJR - C (19) - 350
400 mm	CJR - C (16) - 400	400 mm	CJR - C (19) - 400
450 mm	CJR - C (16) - 450	450 mm	CJR - C (19) - 450
500 mm	CJR - C (16) - 500	500 mm	CJR - C (19) - 500
550 mm	CJR - C (16) - 550	550 mm	CJR - C (19) - 550
600 mm	CJR - C (16) - 600	600 mm	CJR - C (19) - 600



16mm 柜体安装所需空间 Space Requirement

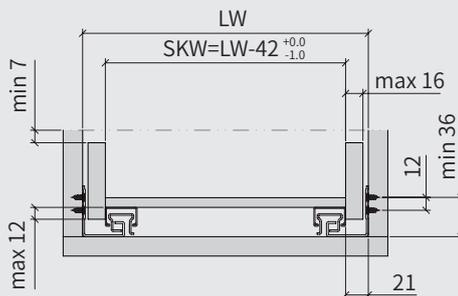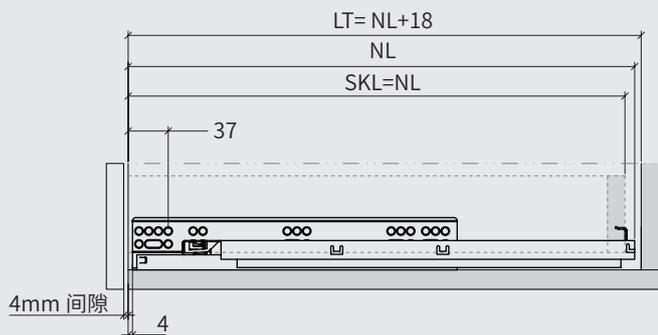

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


19mm 柜体安装所需空间 Space Requirement

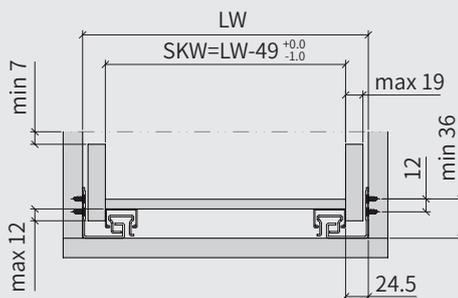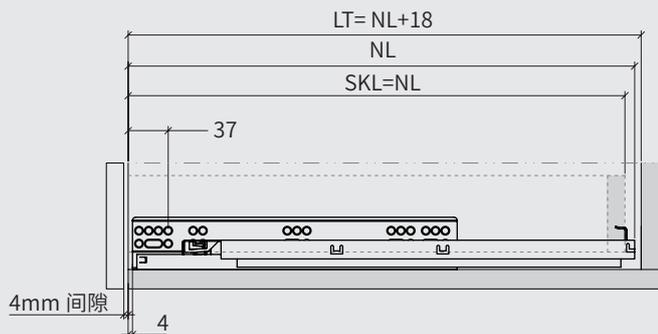

滑轨安装孔尺寸 (mm) Slide rail mounting hole size

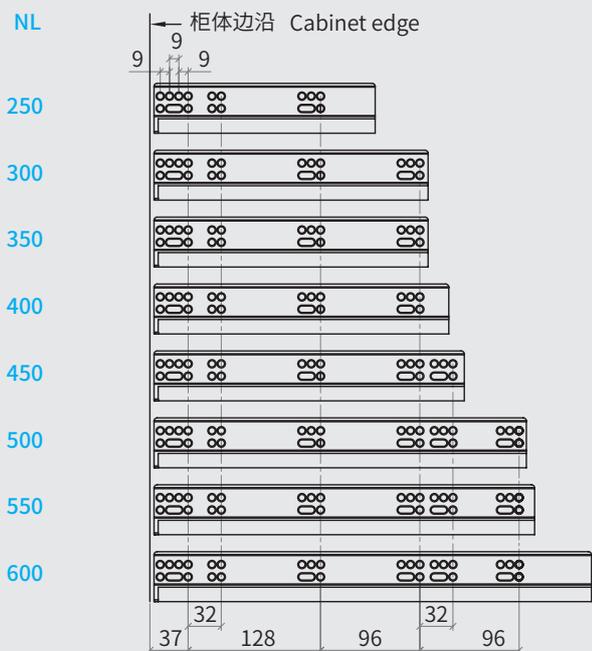

抽屉钻孔尺寸 (mm) drawer drill size

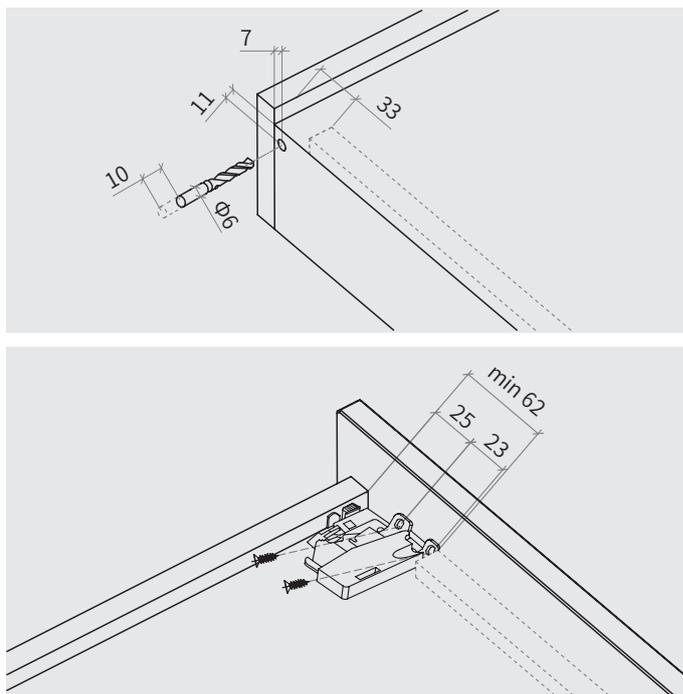

# MCJR-C

## 16mm & 19mm

系列三节普通反弹隐藏滑轨配合金把手 (减尺)  
 FULL EXTENSION PUSH OPEN DRAWER SLIDES  
 WITH METAL HANDLE ( SHORTAGE SIZE)



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

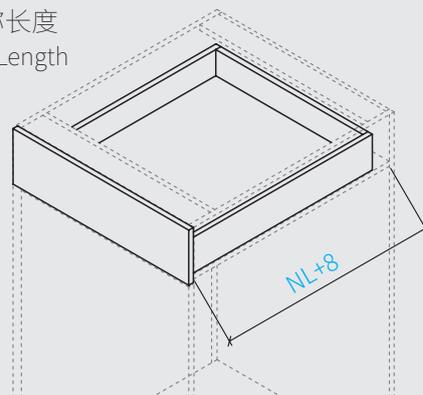

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通反弹隐藏滑轨 (配合金把手) 左 / 右

FULL EXTENSION PUSH OPEN DRAWER SLIDES  
 (WITH METAL HANDLE) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MCJR - C (16) - 250	250 mm	MCJR - C (19) - 250
300 mm	MCJR - C (16) - 300	300 mm	MCJR - C (19) - 300
350 mm	MCJR - C (16) - 350	350 mm	MCJR - C (19) - 350
400 mm	MCJR - C (16) - 400	400 mm	MCJR - C (19) - 400
450 mm	MCJR - C (16) - 450	450 mm	MCJR - C (19) - 450
500 mm	MCJR - C (16) - 500	500 mm	MCJR - C (19) - 500
550 mm	MCJR - C (16) - 550	550 mm	MCJR - C (19) - 550
600 mm	MCJR - C (16) - 600	600 mm	MCJR - C (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

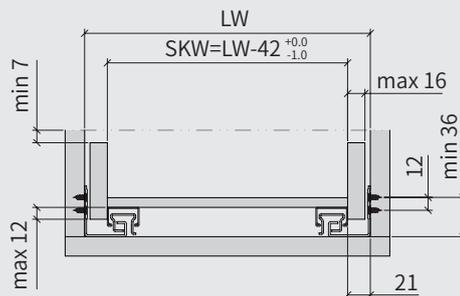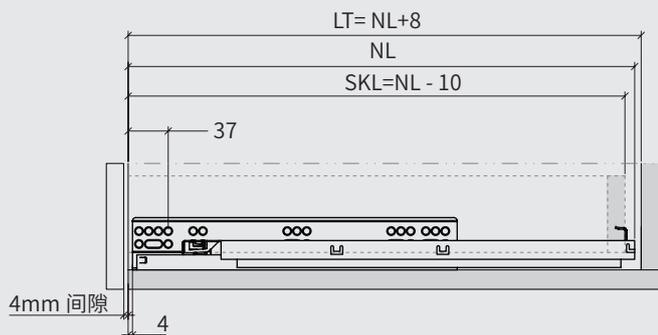

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

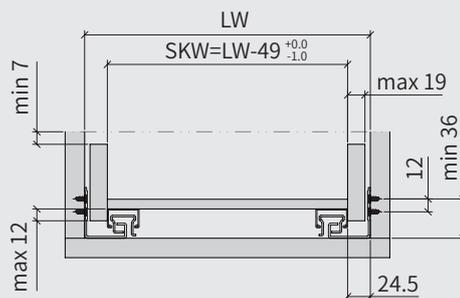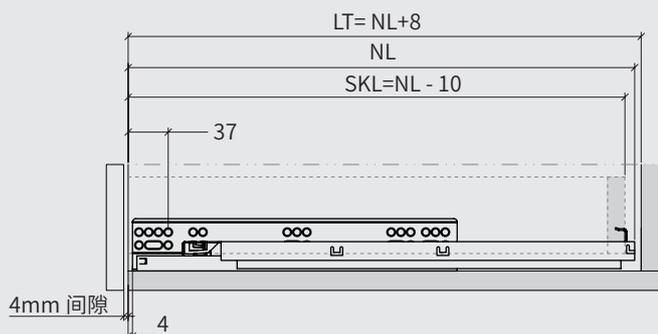

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

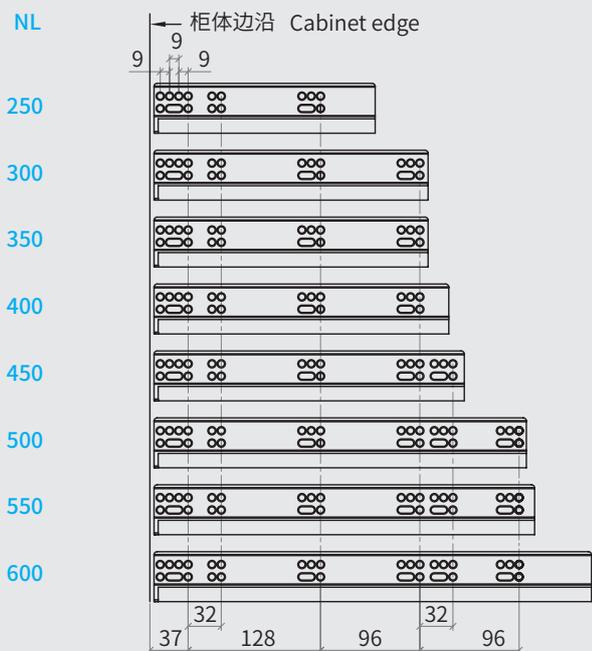

### 抽屉钻孔尺寸 (mm) drawer drill size

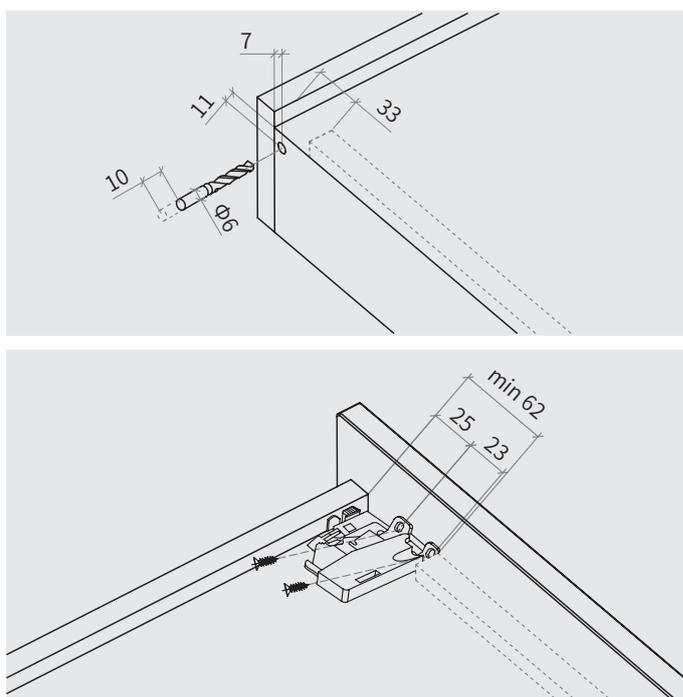



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

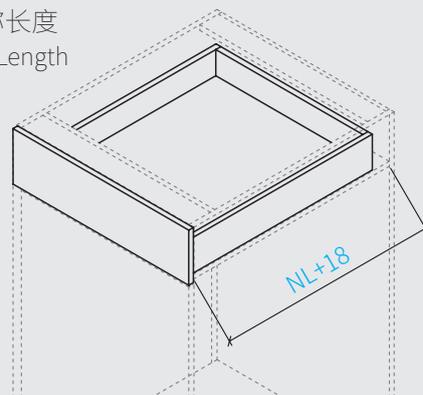

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通反弹隐藏滑轨 (配插销) 左 / 右

FULL EXTENSION PUSH OPEN DRAWER SLIDES  
(WITH PIN) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	CTR - A (16) - 250	250 mm	CTR - A (19) - 250
300 mm	CTR - A (16) - 300	300 mm	CTR - A (19) - 300
350 mm	CTR - A (16) - 350	350 mm	CTR - A (19) - 350
400 mm	CTR - A (16) - 400	400 mm	CTR - A (19) - 400
450 mm	CTR - A (16) - 450	450 mm	CTR - A (19) - 450
500 mm	CTR - A (16) - 500	500 mm	CTR - A (19) - 500
550 mm	CTR - A (16) - 550	550 mm	CTR - A (19) - 550
600 mm	CTR - A (16) - 600	600 mm	CTR - A (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

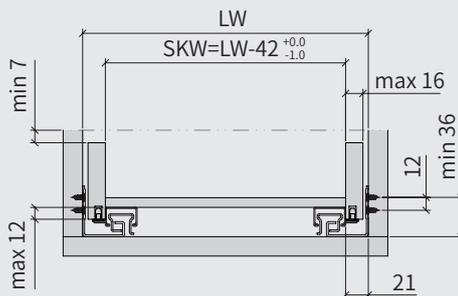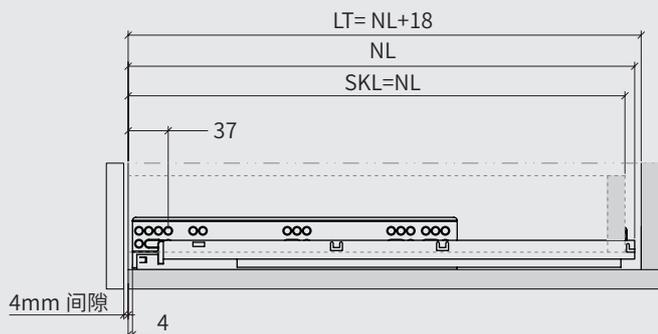

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

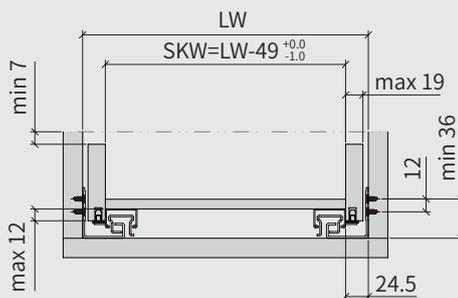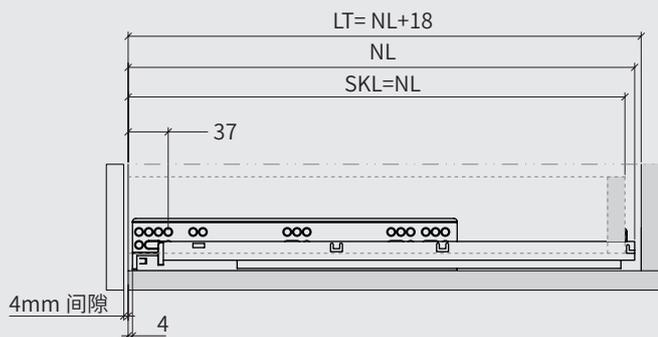

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

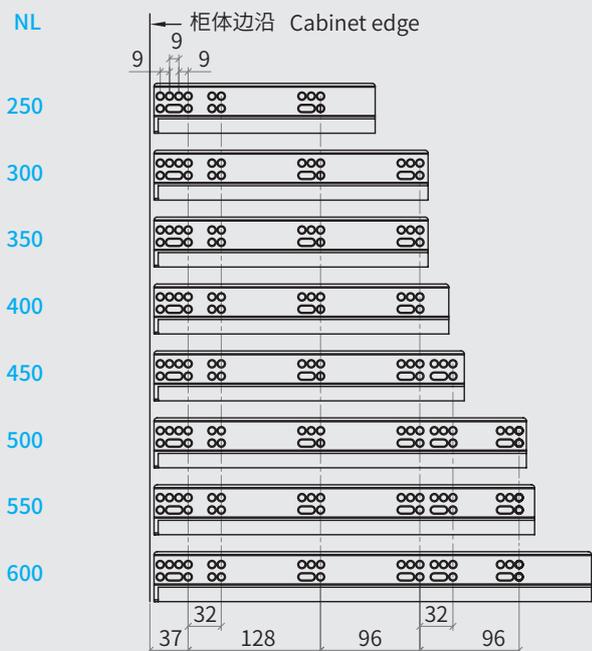

### 抽屉钻孔尺寸 (mm) drawer drill size

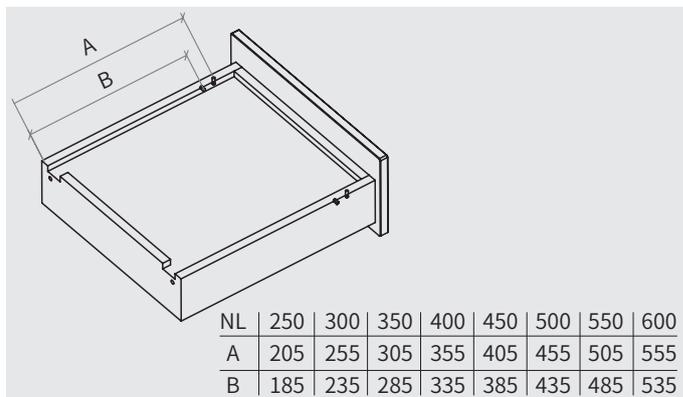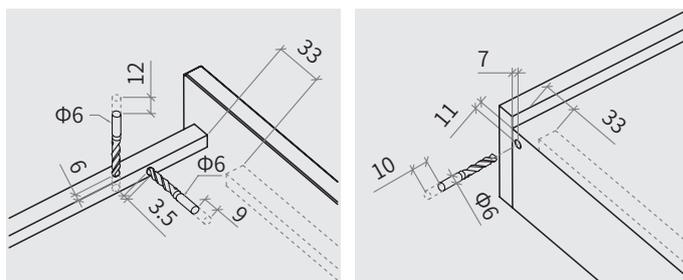

# MCTR-A

## 16mm & 19mm

系列三节普通反弹隐藏滑轨配插销 (减尺)  
 FULL EXTENSION PUSH OPEN DRAWER SLIDES  
 WITH PIN (SHORTAGE SIZE)



全拉出



承重 35KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

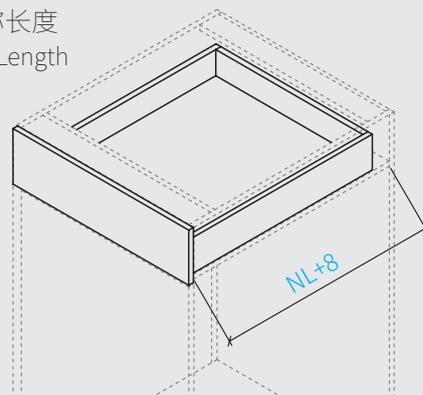

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节普通反弹隐藏滑轨 (配插销) 左 / 右

FULL EXTENSION PUSH OPEN DRAWER SLIDES  
 (WITH PIN) LEFT/RIGHT

35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MCTR - A (16) - 250	250 mm	MCTR - A (19) - 250
300 mm	MCTR - A (16) - 300	300 mm	MCTR - A (19) - 300
350 mm	MCTR - A (16) - 350	350 mm	MCTR - A (19) - 350
400 mm	MCTR - A (16) - 400	400 mm	MCTR - A (19) - 400
450 mm	MCTR - A (16) - 450	450 mm	MCTR - A (19) - 450
500 mm	MCTR - A (16) - 500	500 mm	MCTR - A (19) - 500
550 mm	MCTR - A (16) - 550	550 mm	MCTR - A (19) - 550
600 mm	MCTR - A (16) - 600	600 mm	MCTR - A (19) - 600



### 16mm 柜体安装所需空间 Space Requirement

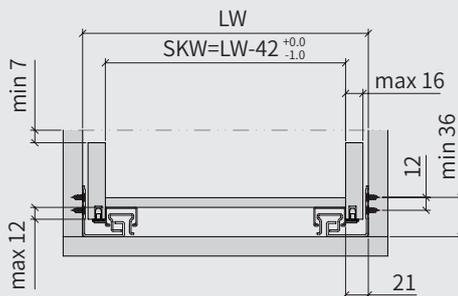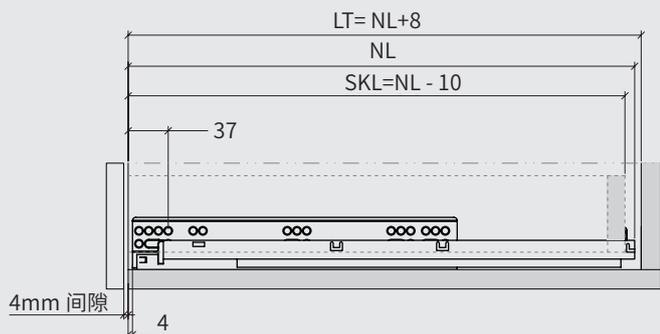

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

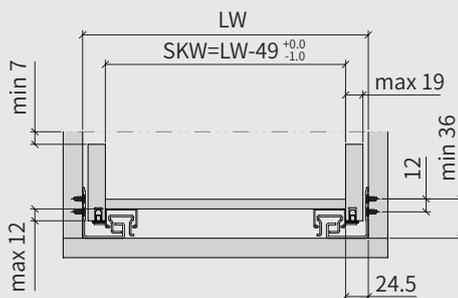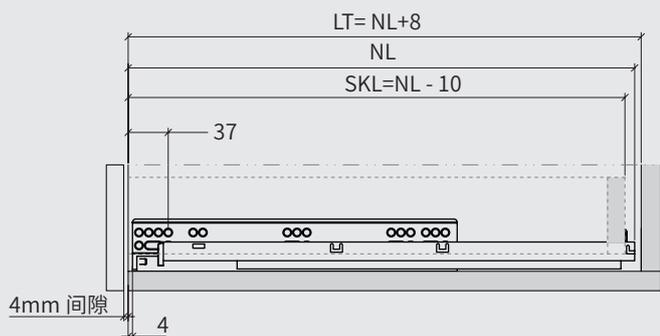

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

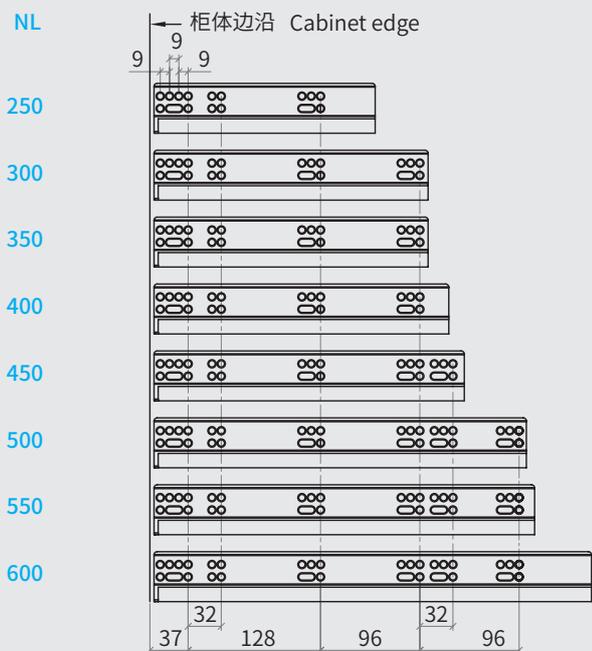

### 抽屉钻孔尺寸 (mm) drawer drill size

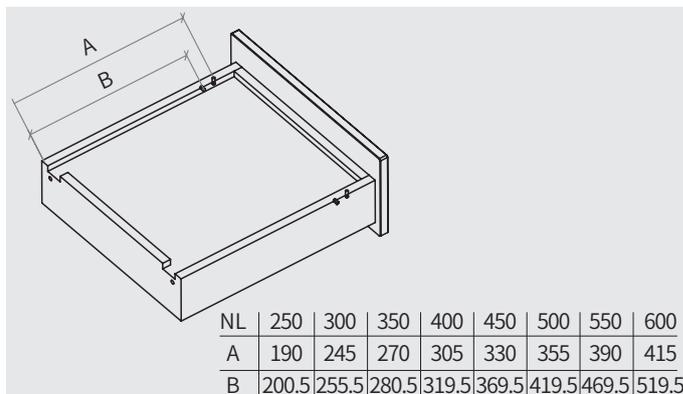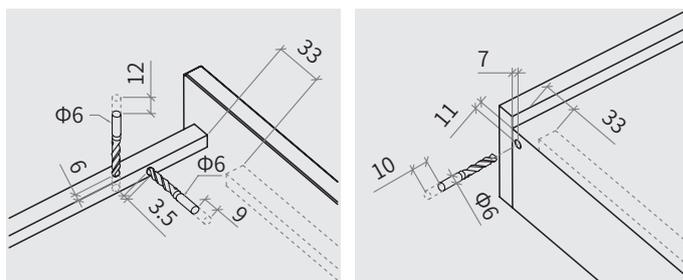

# FULL EXTENSION AMERICAN TYPE CONCEALED DRAWER SLIDES

## 三节美式阻尼隐藏滑轨



家乐斯

HOUSEHOLD HARDWARE  
PRODUCT MANUAL



配二维把手



配一维把手

# AN



配合金把手



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

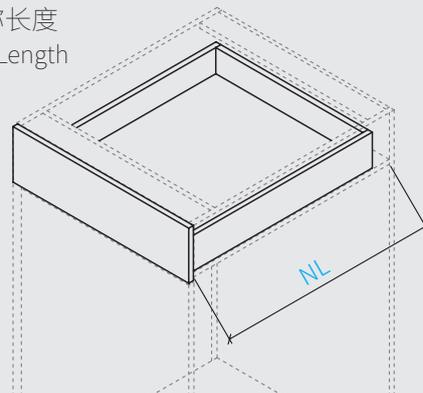

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节美式阻尼隐藏滑轨 (配二维把手) 左 / 右

FULL EXTENSION AMERICAN TYPE CONCEALED DRAWER SLIDES  
(WITH 2D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
229 mm	EJH - A (16) - 9"	229 mm	EJH - A (19) - 9"
305 mm	EJH - A (16) - 12"	305 mm	EJH - A (19) - 12"
381 mm	EJH - A (16) - 15"	381 mm	EJH - A (19) - 15"
457 mm	EJH - A (16) - 18"	457 mm	EJH - A (19) - 18"
533 mm	EJH - A (16) - 21"	533 mm	EJH - A (19) - 21"



### 16mm 柜体安装所需空间 Space Requirement

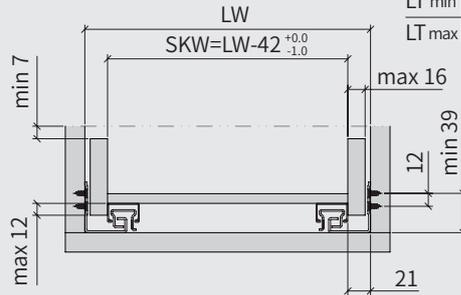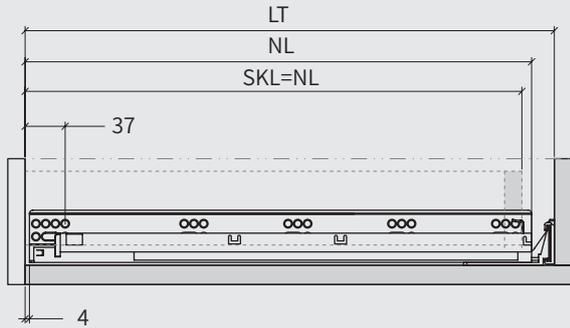

NL	229	305	381	457	533
LT min	275	343	416	494	568
LT max	373	436	514	588	

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width

SKL= 抽屉长度  
Drawer Length


SKW= 抽屉宽度  
Drawer Width

### 19mm 柜体安装所需空间 Space Requirement

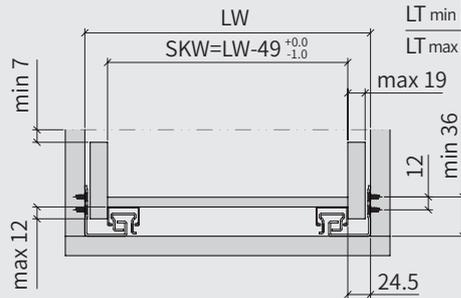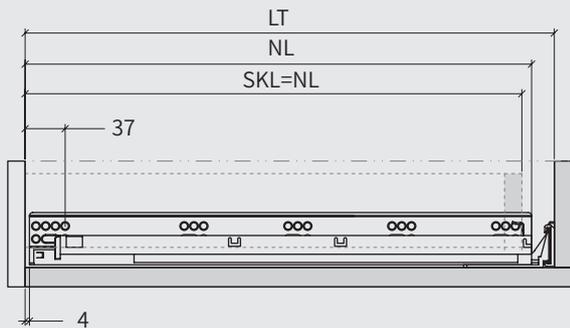


NL	229	305	381	457	533
LT min	275	343	416	494	568
LT max	373	436	514	588	



### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

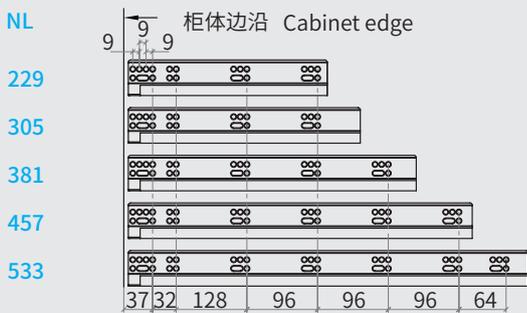

### 抽屉钻孔尺寸 (mm) drawer drill size

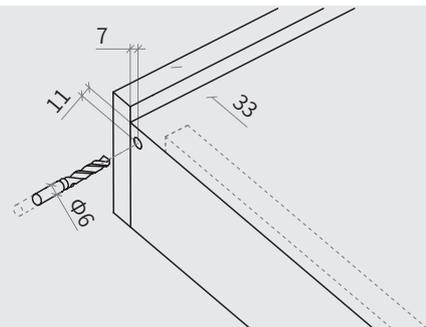

### 塑胶尾支架安装数据 (mm) Plastic tail bracket installation data

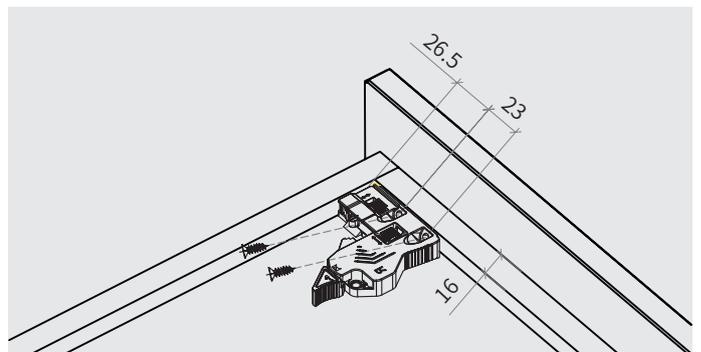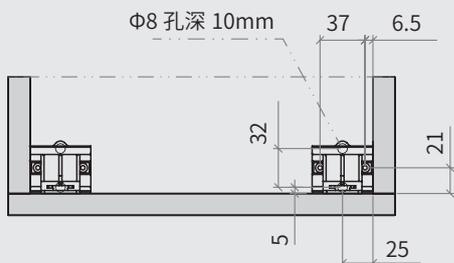

# EJH-B

## 16mm & 19mm

系列三节美式阻尼隐藏滑轨配一维把手

FULL EXTENSION AMERICAN TYPE CONCEALED DRAWER SLIDES WITH 1D HANDLE



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

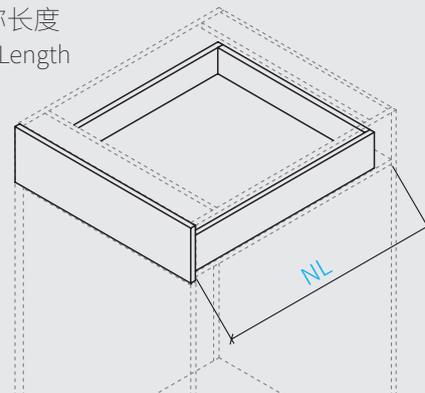

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节美式阻尼隐藏滑轨 (配一维把手) 左 / 右

FULL EXTENSION AMERICAN TYPE CONCEALED DRAWER SLIDES (WITH 1D HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
305 mm	EJH - B (16) - 12"	305 mm	EJH - B (19) - 12"
381 mm	EJH - B (16) - 15"	381 mm	EJH - B (19) - 15"
457 mm	EJH - B (16) - 18"	457 mm	EJH - B (19) - 18"
533 mm	EJH - B (16) - 21"	533 mm	EJH - B (19) - 21"



### 16mm 柜体安装所需空间 Space Requirement

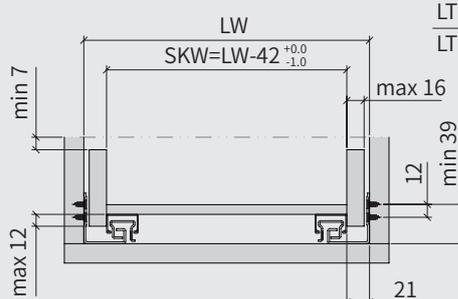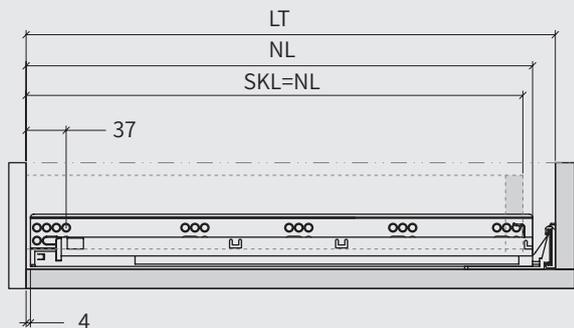

NL	305	381	457	533
LT min	343	416	494	568
LT max	373	436	514	588

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width

SKL= 抽屉长度  
Drawer Length


SKW= 抽屉宽度  
Drawer Width

### 19mm 柜体安装所需空间 Space Requirement

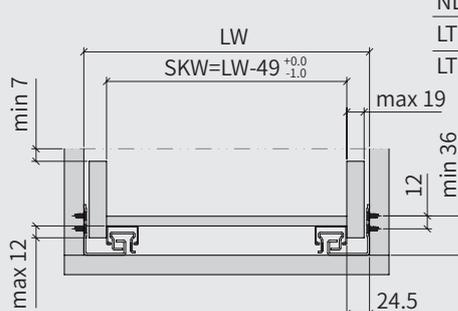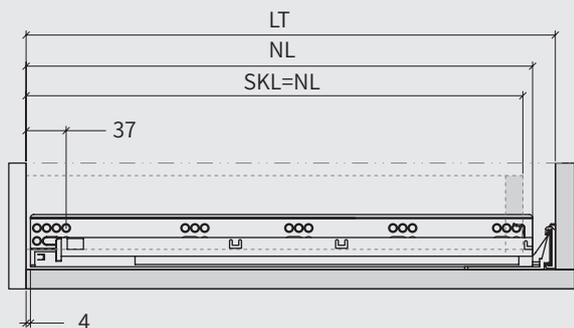


NL	305	381	457	533
LT min	343	416	494	568
LT max	373	436	514	588



### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

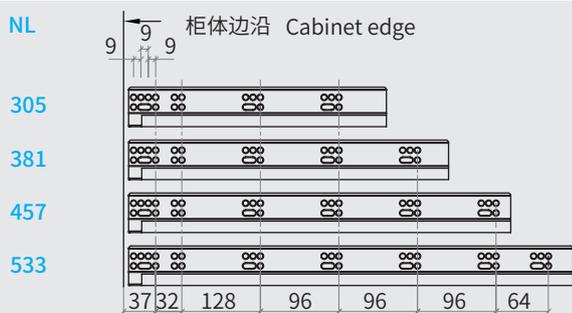

### 抽屉钻孔尺寸 (mm) drawer drill size

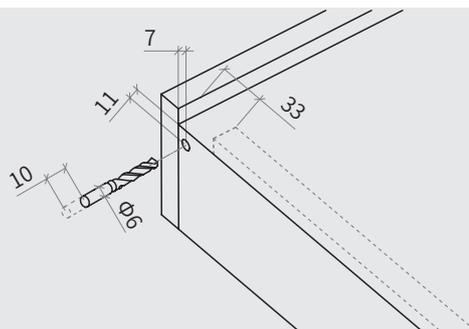

### 塑胶尾支架安装数据 (mm) Plastic tail bracket installation data

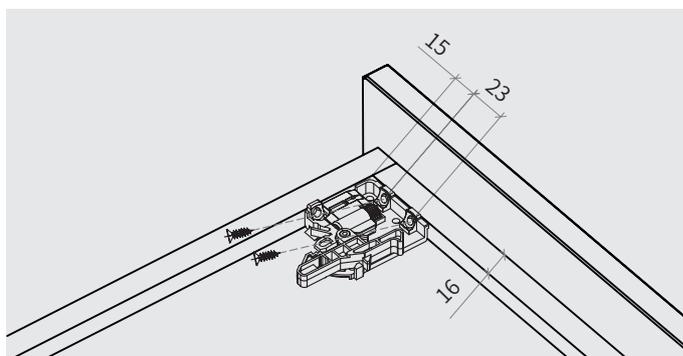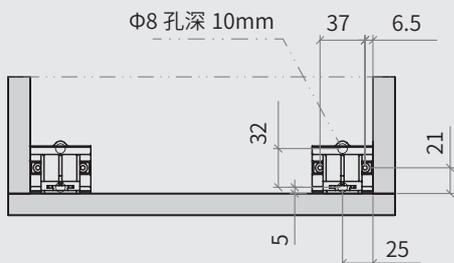



全拉出



承重 35KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

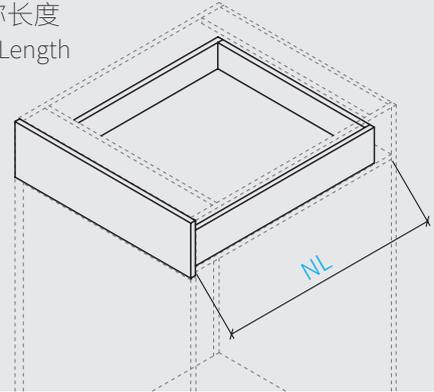

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 加宽滚珠平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 35KG、开合测试 5 万次以上
- Open & close the whole process smoothly silently
- Widened ball smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节美式阻尼隐藏滑轨 (配合金把手) 左 / 右

FULL EXTENSION AMERICAN TYPE CONCEALED DRAWER SLIDES  
(WITH METAL HANDLE) LEFT/RIGHT

35kg 阻尼滑轨 16mm		35kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
305 mm	EJH - C (16) - 12"	305 mm	EJH - C (19) - 12"
381 mm	EJH - C (16) - 15"	381 mm	EJH - C (19) - 15"
457 mm	EJH - C (16) - 18"	457 mm	EJH - C (19) - 18"
533 mm	EJH - C (16) - 21"	533 mm	EJH - C (19) - 21"



### 16mm 柜体安装所需空间 Space Requirement

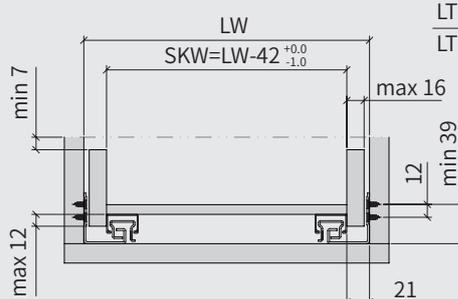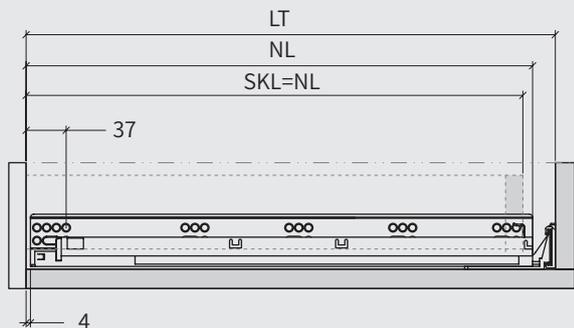

NL	305	381	457	533
LT min	343	416	494	568
LT max	373	436	514	588

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width

SKL= 抽屉长度  
Drawer Length


SKW= 抽屉宽度  
Drawer Width

### 19mm 柜体安装所需空间 Space Requirement

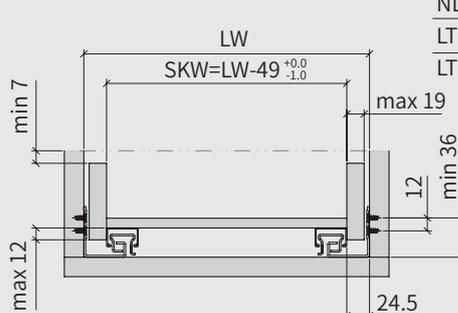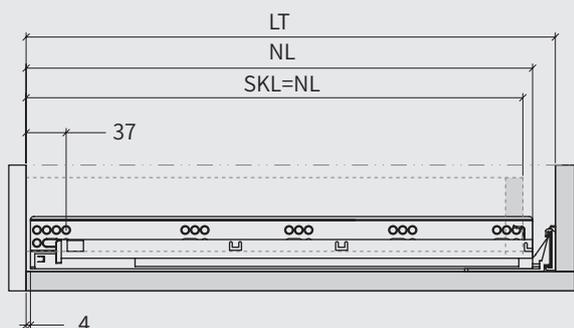


NL	305	381	457	533
LT min	343	416	494	568
LT max	373	436	514	588



### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

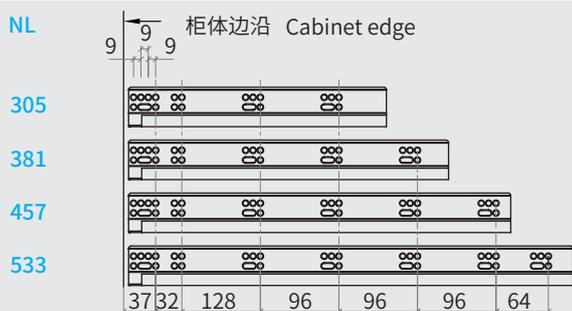


### 抽屉钻孔尺寸 (mm) drawer drill size

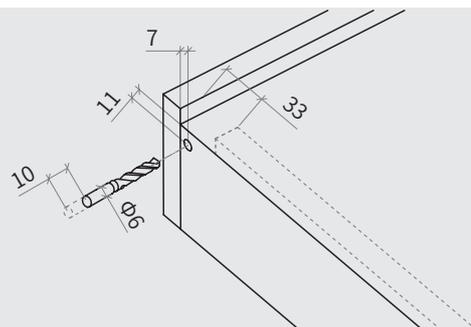

### 塑胶尾支架安装数据 (mm) Plastic tail bracket installation data

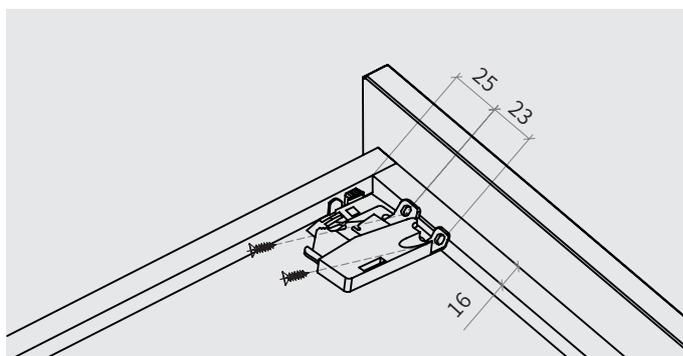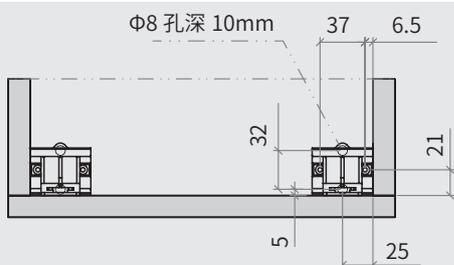

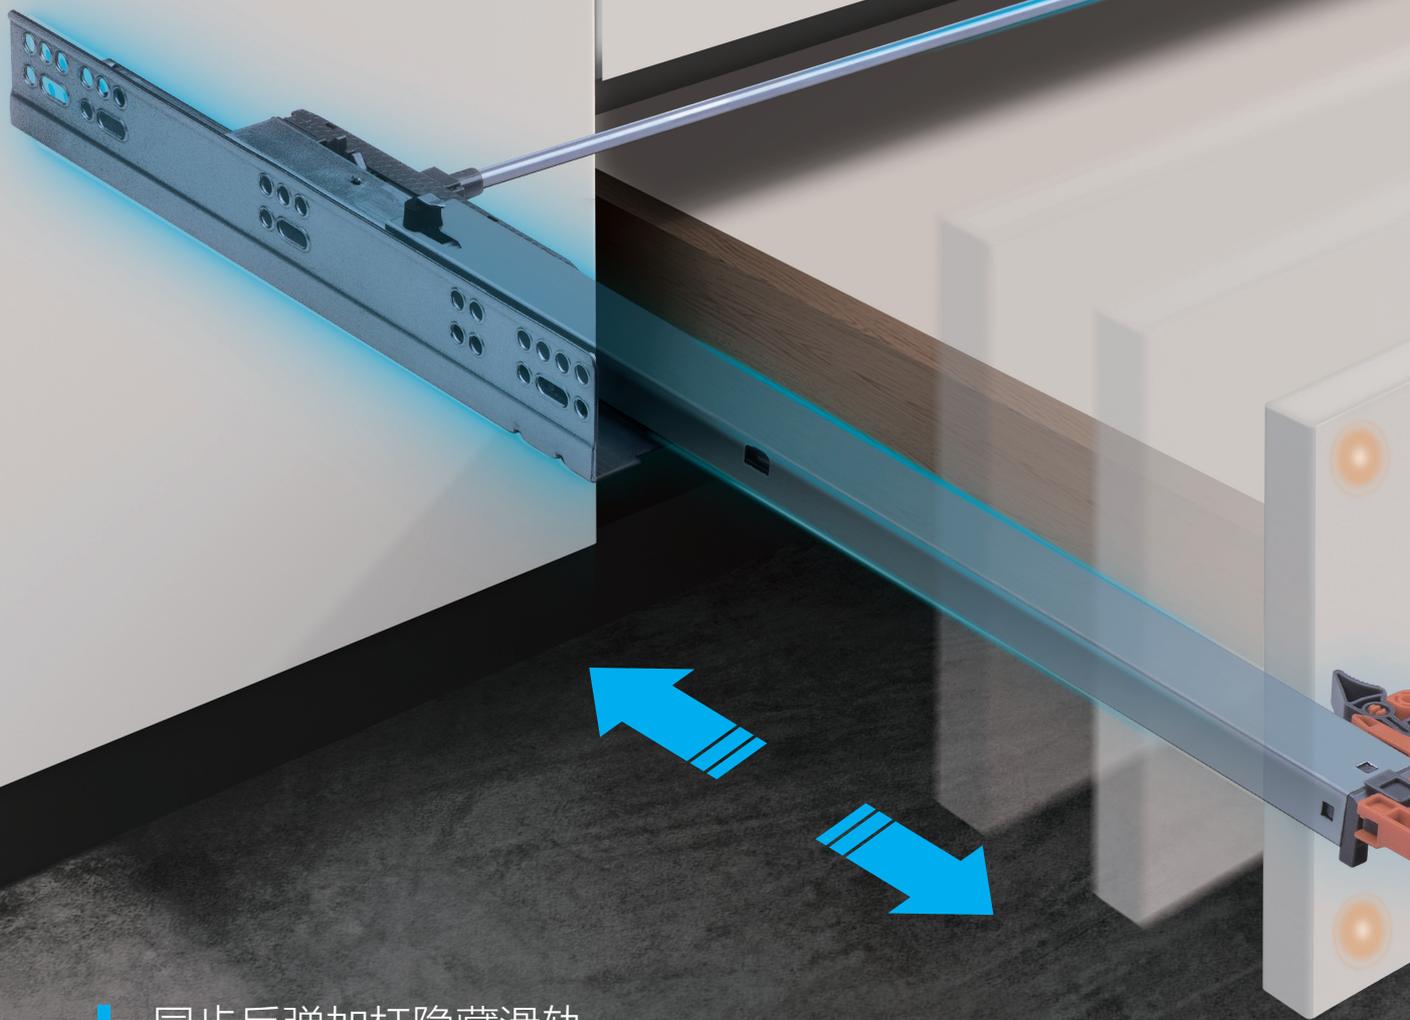


同步反弹加杆隐藏滑轨

任意按！全方位轻盈弹出。



CONCEALED DRAWER SLIDE  
HOUSEHOLD HARDWARE

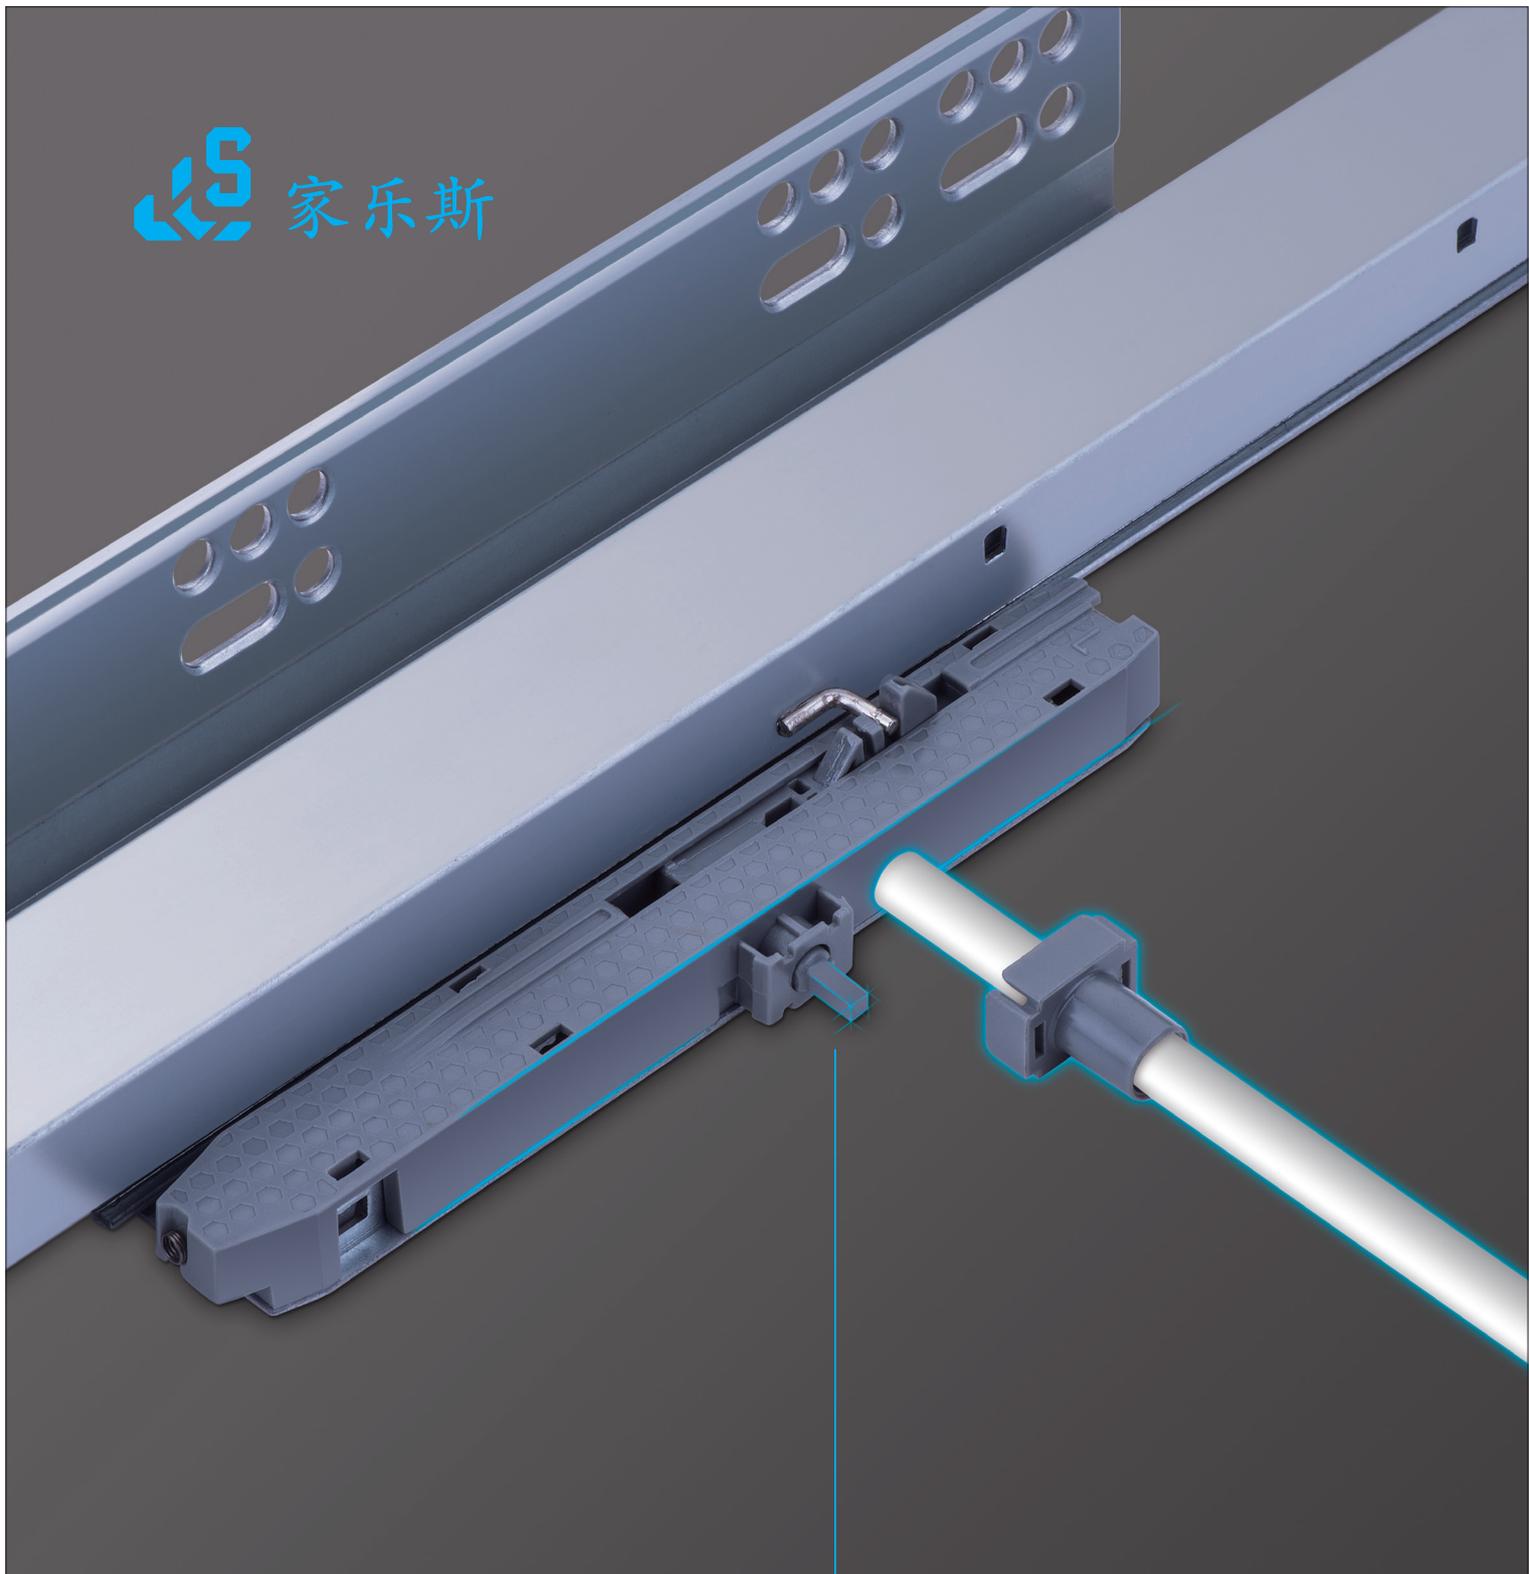

### 安装铝杆简便快捷

Easy and fast installation of aluminum rod

三节同步反弹 + 杆隐藏滑轨

## 创新技术

- 精密齿轮与齿条合程同步吻合 -

三节同步反弹 + 杆隐藏滑轨

# AJR-A-TB

## 16mm & 19mm

系列三节同步反弹 + 杆隐藏滑轨配二维把手 (足尺)  
 FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
 WITH 2D HANDLE AND BAR ( FULL SIZE)




全拉出



承重 35KG




反弹技术

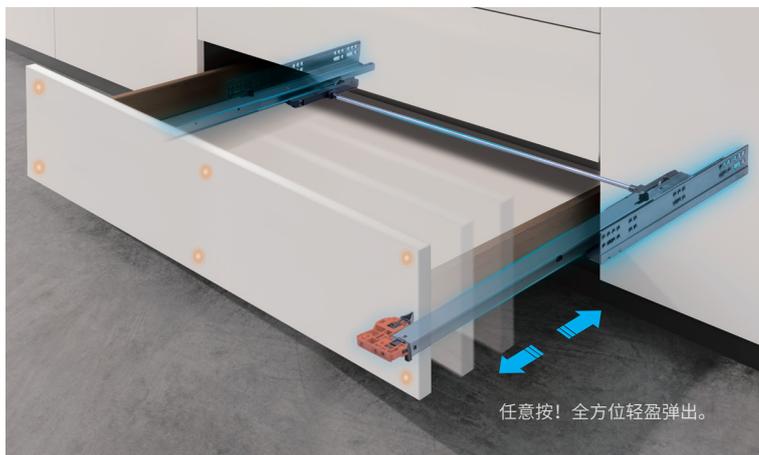

任意按! 全方位轻盈弹出。

### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

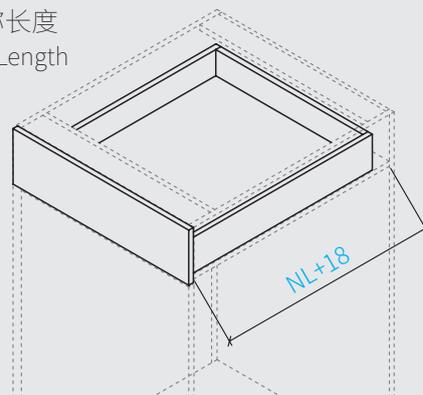

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information



三节同步反弹 + 杆隐藏滑轨 (配二维把手) 左 / 右

FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
 (WITH 2D HANDLE AND BAR) LEFT/RIGHT


35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	AJR - A - TB (16) - 300	300 mm	AJR - A - TB (19) - 300
350 mm	AJR - A - TB (16) - 350	350 mm	AJR - A - TB (19) - 350
400 mm	AJR - A - TB (16) - 400	400 mm	AJR - A - TB (19) - 400
450 mm	AJR - A - TB (16) - 450	450 mm	AJR - A - TB (19) - 450
500 mm	AJR - A - TB (16) - 500	500 mm	AJR - A - TB (19) - 500
550 mm	AJR - A - TB(16) - 550	550 mm	AJR - A - TB (19) - 550



### 16mm 柜体安装所需空间 Space Requirement


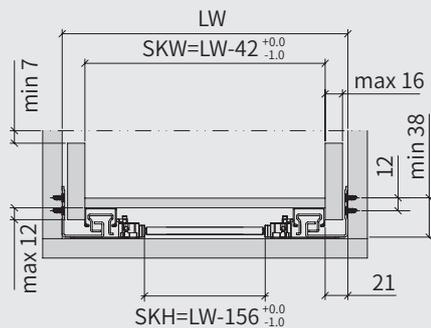
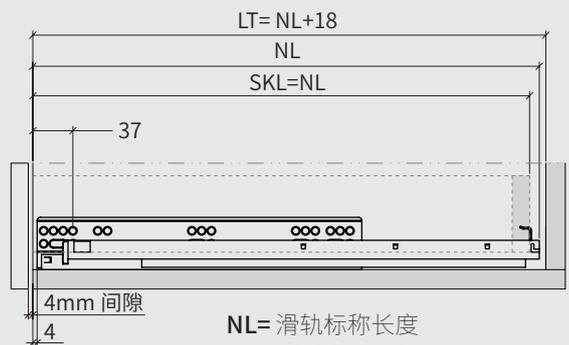


### 抽屉钻孔尺寸 (mm) drawer drill size

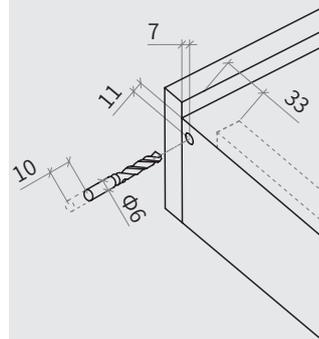


LT= 柜体内部深度 Cabinet Interior Depth    LW= 柜体内部宽度 Cabinet Internal Width    SKL= 抽屉长度 Drawer Length    SKW= 抽屉宽度 Drawer Width    SKH= 同步杆长度 Rod length

### 19mm 柜体安装所需空间 Space Requirement

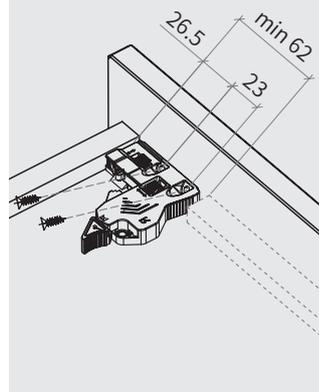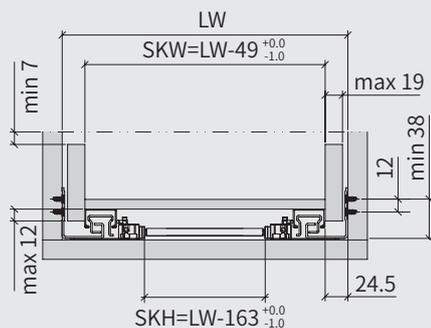
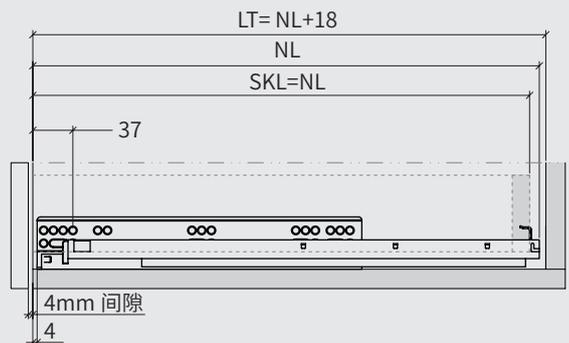


### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

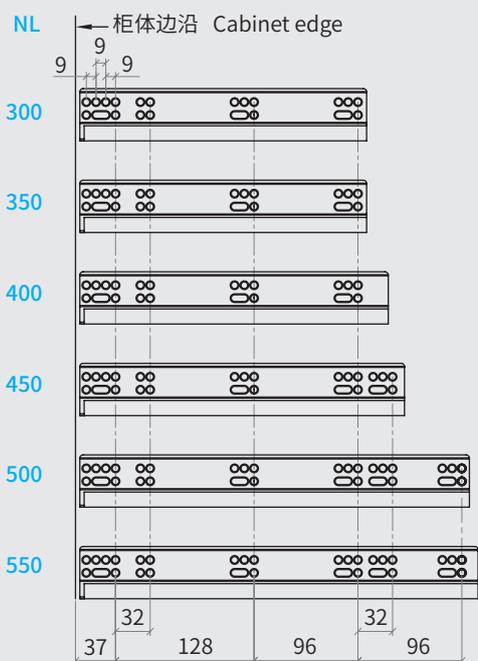


### 同步杆安装步骤 Rod installation procedure

步骤一：将轴套装入同步杆（注意方向）  
Step 1: Install the shaft sleeve into the synchronization rod (pay attention to the direction)

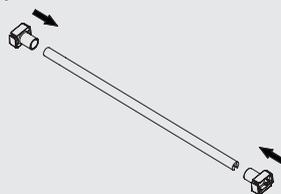


轴套装入同步杆形成组件  
Install the shaft sleeve into the synchronization rod to form a component

步骤二：将同步杆组件架入同步器转轴  
Step 2: Mount the synchronizing rod assembly into the synchronizer shaft

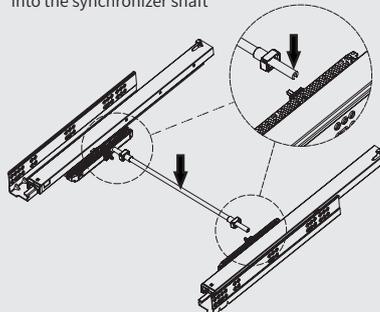

步骤三：将轴套扣入同步器  
Step 3: buckle the shaft sleeve into the synchronizer

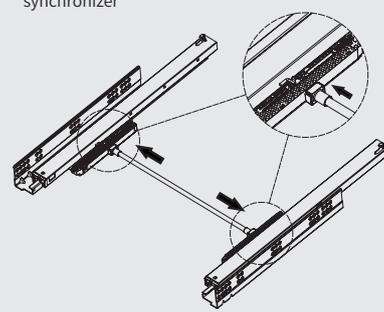

# MAJR-A-TB

## 16mm & 19mm

系列三节同步反弹隐 + 杆藏滑轨配二维把手 (减尺)  
 FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
 WITH 2D HANDLE AND BAR (SHORTAGE SIZE)




全拉出



承重 35KG




反弹技术

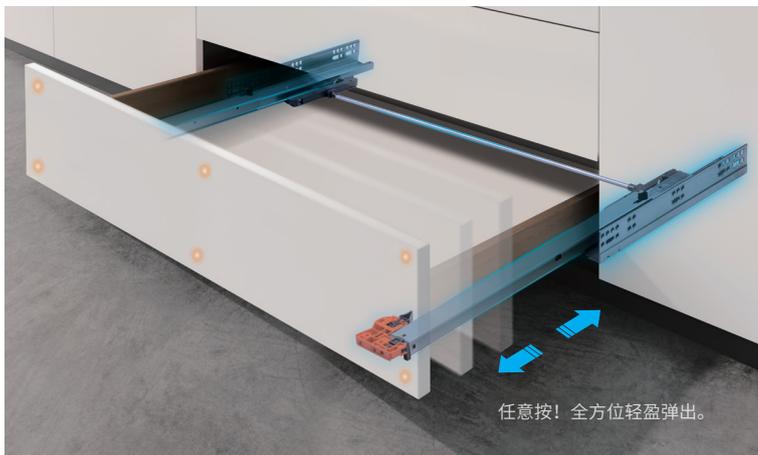

任意按! 全方位轻盈弹出。

### 所需空间 Space Requirement

NL= 标称长度  
 Nominal Length

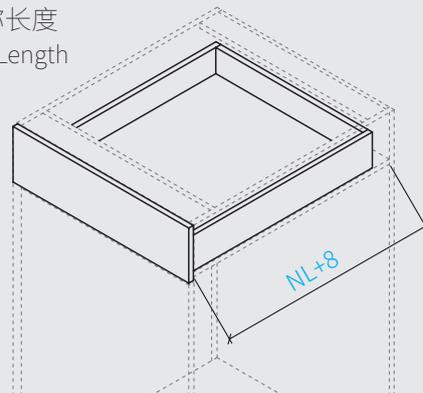

### 产品信息 Product Description

- 全程同步、柔顺静音
- 全拉出防脱齿、防下沉结构
- 精密反弹器可强拉设计
- 负重 35KG、开合测试 5 万次以上
- Full synchronization, soft mute
- Full pull-out anti-drop tooth and anti-sinking structure
- Precision rebounder can be forced to pull design
- More than 50,000 opening and closing tests with a load of 35KG

### 订货信息 Ordering Information

三节同步反弹 + 杆隐藏滑轨 (配二维把手) 左 / 右

FULL EXTENSION SYNCHRONIZED PUSH OPEN DRAWER SLIDES  
 (WITH 2D HANDLE AND BAR) LEFT/RIGHT


35kg 反弹滑轨 16mm		35kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
300 mm	MAJR - A - TB (16) - 300	300 mm	MAJR - A - TB (19) - 300
350 mm	MAJR - A - TB (16) - 350	350 mm	MAJR - A - TB (19) - 350
400 mm	MAJR - A - TB (16) - 400	400 mm	MAJR - A - TB (19) - 400
450 mm	MAJR - A - TB (16) - 450	450 mm	MAJR - A - TB (19) - 450
500 mm	MAJR - A - TB (16) - 500	500 mm	MAJR - A - TB (19) - 500
550 mm	MAJR - A - TB (16) - 550	550 mm	MAJR - A - TB (19) - 550



### 16mm 柜体安装所需空间 Space Requirement




NL= 滑轨标称长度  
Nominal Slide Length



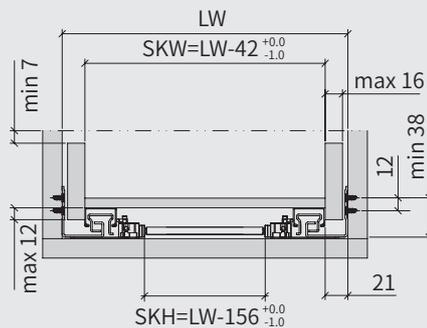


LT= 柜体内部深度 Cabinet Interior Depth    LW= 柜体内部宽度 Cabinet Internal Width    SKL= 抽屉长度 Drawer Length    SKW= 抽屉宽度 Drawer Width    SKH= 同步杆长度 Rod length


### 抽屉钻孔尺寸 (mm) drawer drill size

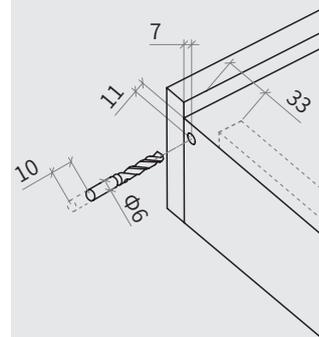

### 19mm 柜体安装所需空间 Space Requirement

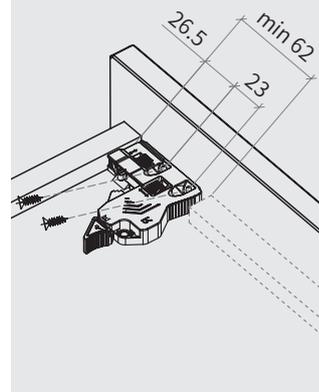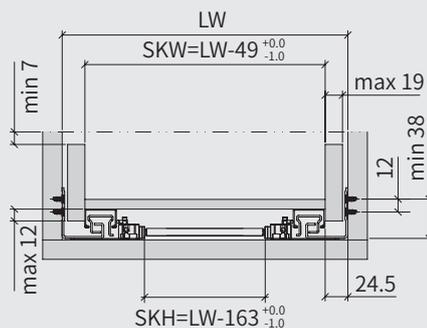
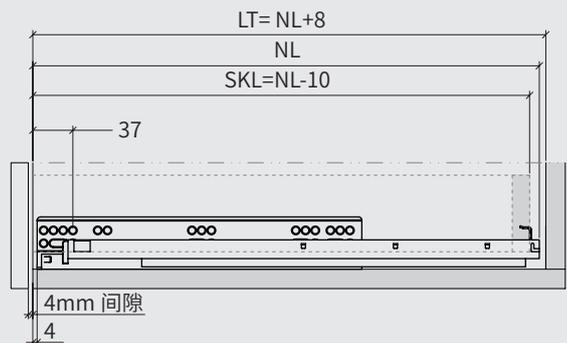


### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

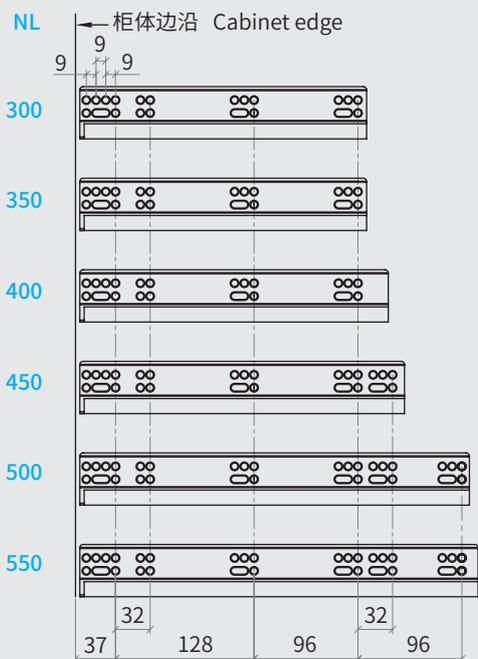


### 同步杆安装步骤 Rod installation procedure

步骤一：将轴套装入同步杆（注意方向）  
Step 1: Install the shaft sleeve into the synchronization rod (pay attention to the direction)

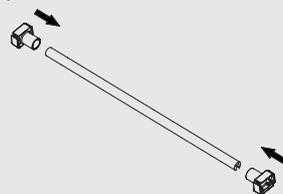


轴套装入同步杆形成组件  
Install the shaft sleeve into the synchronization rod to form a component

步骤二：将同步杆组件架入同步器转轴  
Step 2: Mount the synchronizing rod assembly into the synchronizer shaft

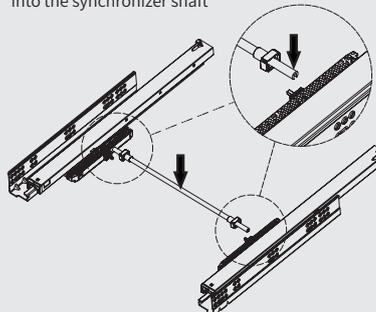

步骤三：将轴套扣入同步器  
Step 3: Buckle the shaft sleeve into the synchronizer

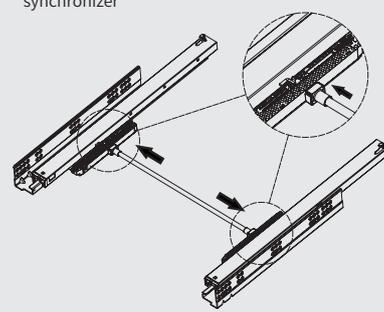

# SINGEL EXTENSION CONCEALED DRAWER SLIDES

二节普通阻尼隐藏滑轨



家乐斯

HOUSEHOLD HARDWARE  
PRODUCT MANUAL



配插销



配一维把手



配插销



配一维把手

# BTH-A

## 16mm & 19mm

系列两节阻尼隐藏滑轨配插销 (足尺)  
SINGLE EXTENSION CONCEALED DRAWER SLIDES  
WITH PIN (FULL SIZE)



半拉出



承重 25KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

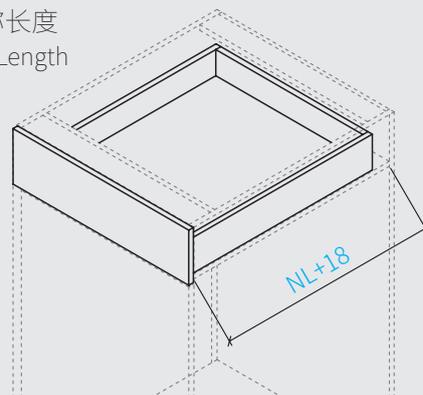

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳半拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth semi-pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information



两节阻尼隐藏滑轨 (配插销) 左 / 右

SINGLE EXTENSION CONCEALED DRAWER SLIDES  
(WITH PIN) LEFT/RIGHT

25kg 阻尼滑轨 16mm		25kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	BTH - A (16) - 250	250 mm	BTH - A (19) - 250
300 mm	BTH - A (16) - 300	300 mm	BTH - A (19) - 300
350 mm	BTH - A (16) - 350	350 mm	BTH - A (19) - 350
400 mm	BTH - A (16) - 400	400 mm	BTH - A (19) - 400
450 mm	BTH - A (16) - 450	450 mm	BTH - A (19) - 450
500 mm	BTH - A (16) - 500	500 mm	BTH - A (19) - 500



### 16mm 柜体安装所需空间 Space Requirement

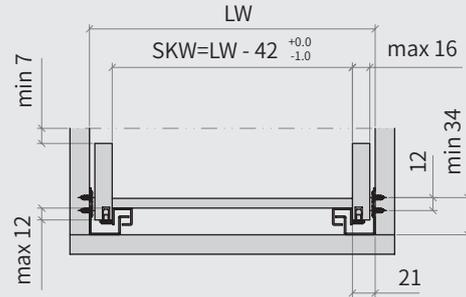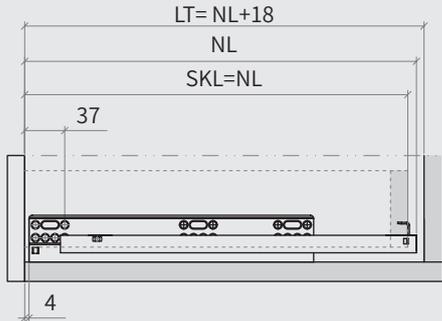

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

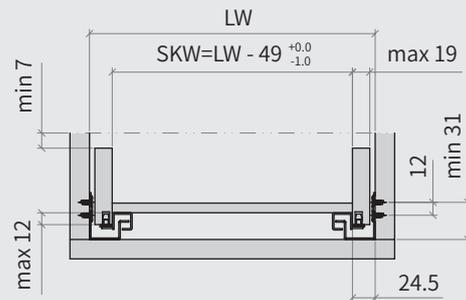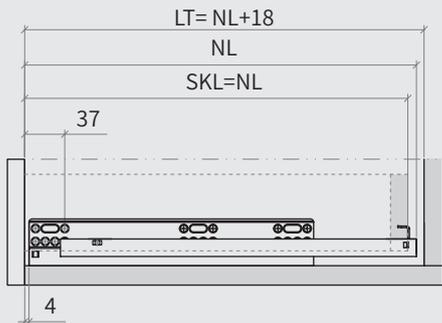

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

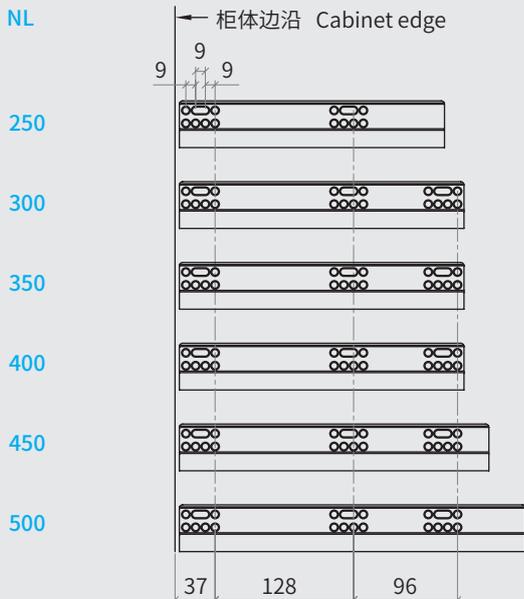

### 抽屉钻孔尺寸 (mm) drawer drill size

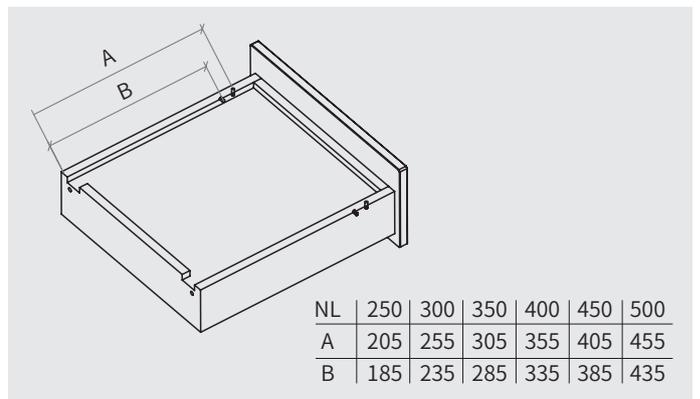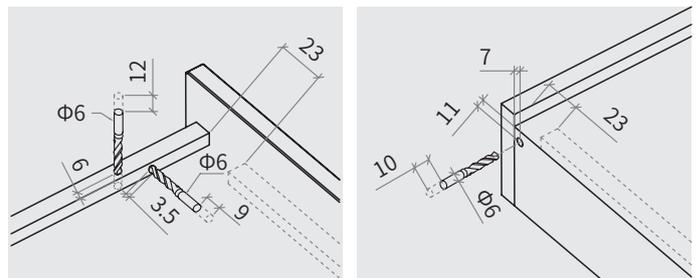

# MBTH-A

## 16mm & 19mm

系列两节阻尼隐藏滑轨配插销 (减尺)  
SINGLE EXTENSION CONCEALED DRAWER SLIDES  
WITH PIN (SHORTAGE SIZE)



半拉出



承重 25KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

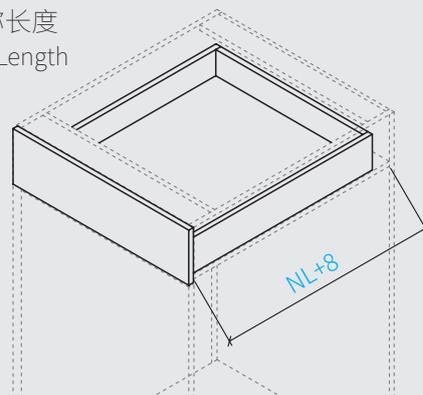

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳半拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth semi-pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information



两节阻尼隐藏滑轨 (配插销) 左 / 右

SINGLE EXTENSION CONCEALED DRAWER SLIDES  
( WITH PIN) LEFT/RIGHT

25kg 阻尼滑轨 16mm		25kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MBTH - A (16) - 250	250 mm	MBTH - A (19) - 250
300 mm	MBTH - A (16) - 300	300 mm	MBTH - A (19) - 300
350 mm	MBTH - A (16) - 350	350 mm	MBTH - A (19) - 350
400 mm	MBTH - A (16) - 400	400 mm	MBTH - A (19) - 400
450 mm	MBTH - A (16) - 450	450 mm	MBTH - A (19) - 450
500 mm	MBTH - A (16) - 500	500 mm	MBTH - A (19) - 500



### 16mm 柜体安装所需空间 Space Requirement

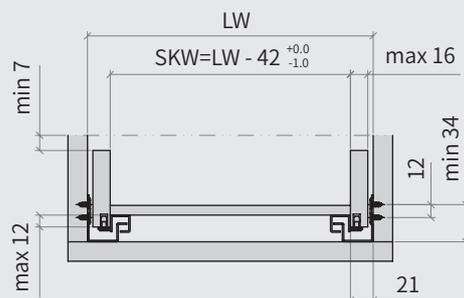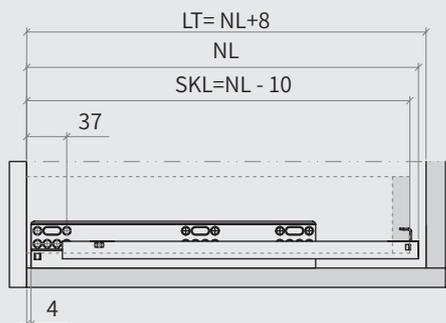

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

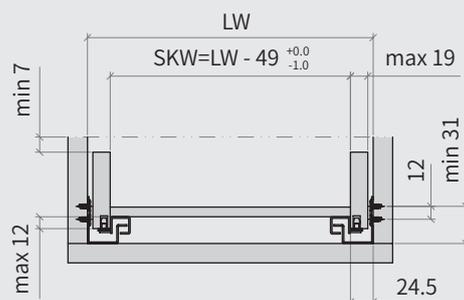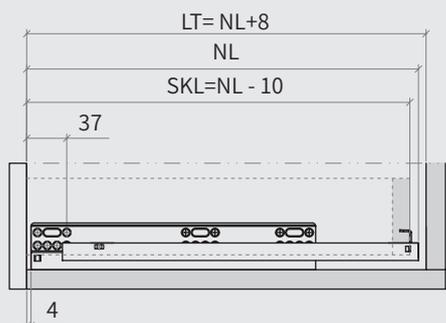

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

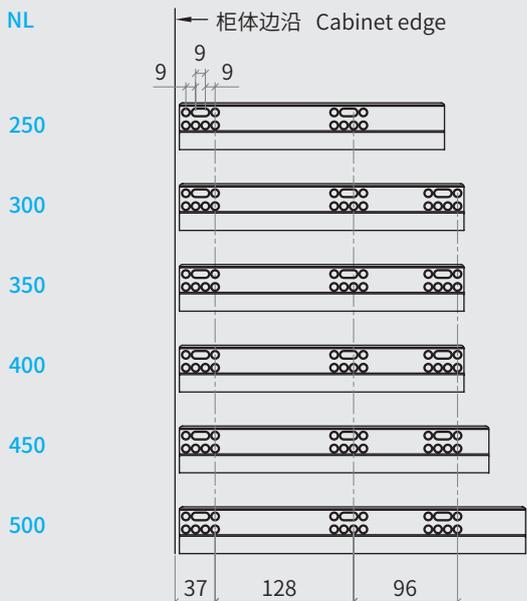

### 抽屉钻孔尺寸 (mm) drawer drill size

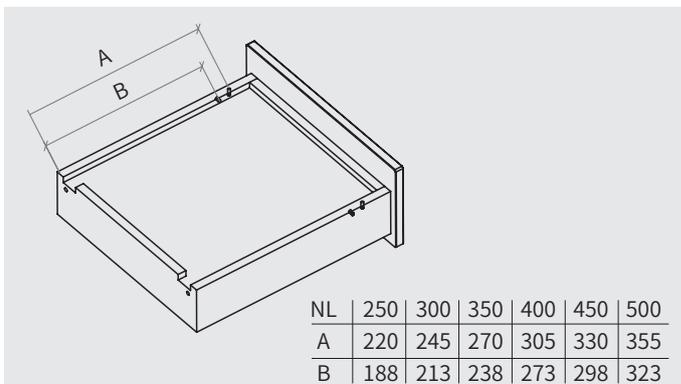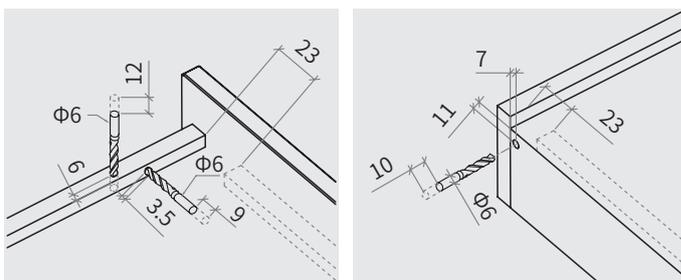

# BJH-A

## 16mm & 19mm

系列两节阻尼隐藏滑轨配一维把手 (足尺)  
SINGLE EXTENSION CONCEALED DRAWER SLIDES  
WITH 1D HANDLE (FULL SIZE)



半拉出



承重 25KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

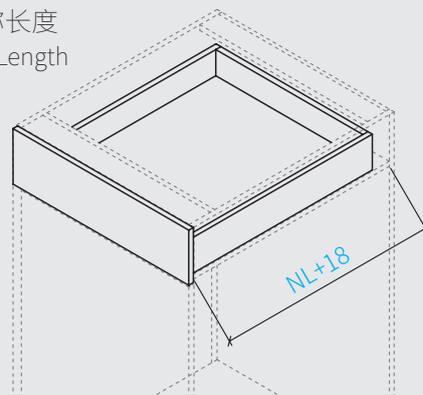

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳半拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth semi-pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information



两节阻尼隐藏滑轨 (配一维把手) 左 / 右

SINGLE EXTENSION CONCEALED DRAWER SLIDES  
(WITH 1D HANDLE) LEFT/RIGHT

25kg 阻尼滑轨 16mm		25kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	BJH - A (16) - 250	250 mm	BJH - A (19) - 250
300 mm	BJH - A (16) - 300	300 mm	BJH - A (19) - 300
350 mm	BJH - A (16) - 350	350 mm	BJH - A (19) - 350
400 mm	BJH - A (16) - 400	400 mm	BJH - A (19) - 400
450 mm	BJH - A (16) - 450	450 mm	BJH - A (19) - 450
500 mm	BJH - A (16) - 500	500 mm	BJH - A (19) - 500



### 16mm 柜体安装所需空间 Space Requirement

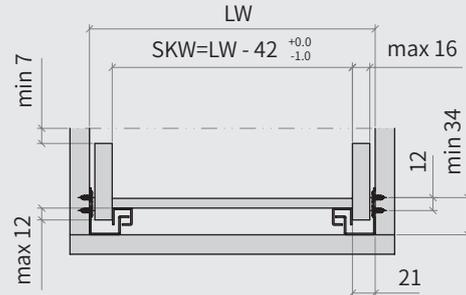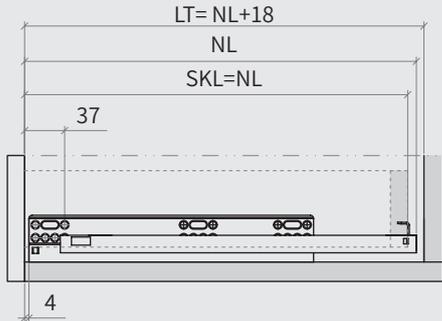

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

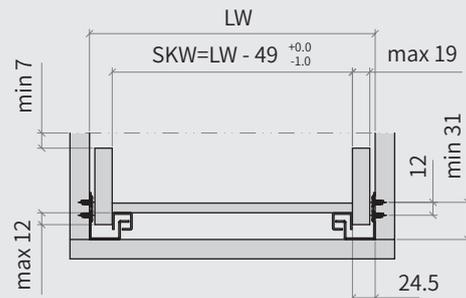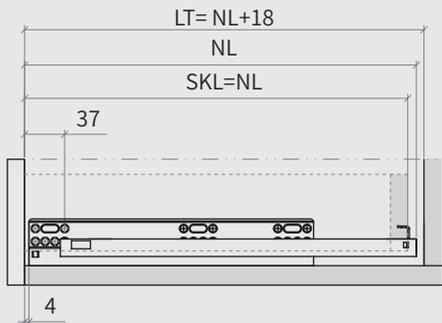

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

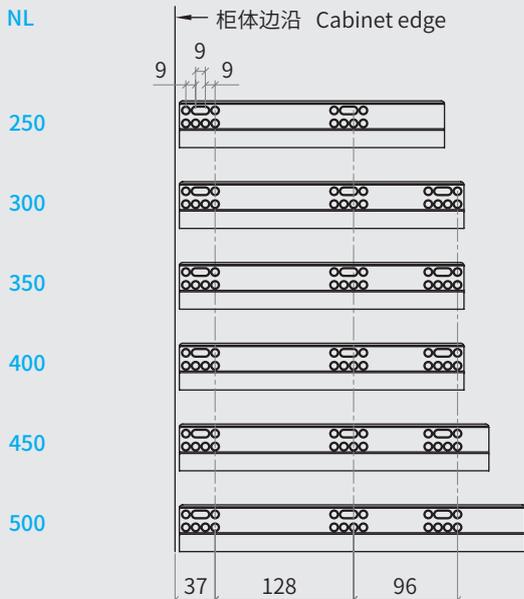

### 抽屉钻孔尺寸 (mm) drawer drill size

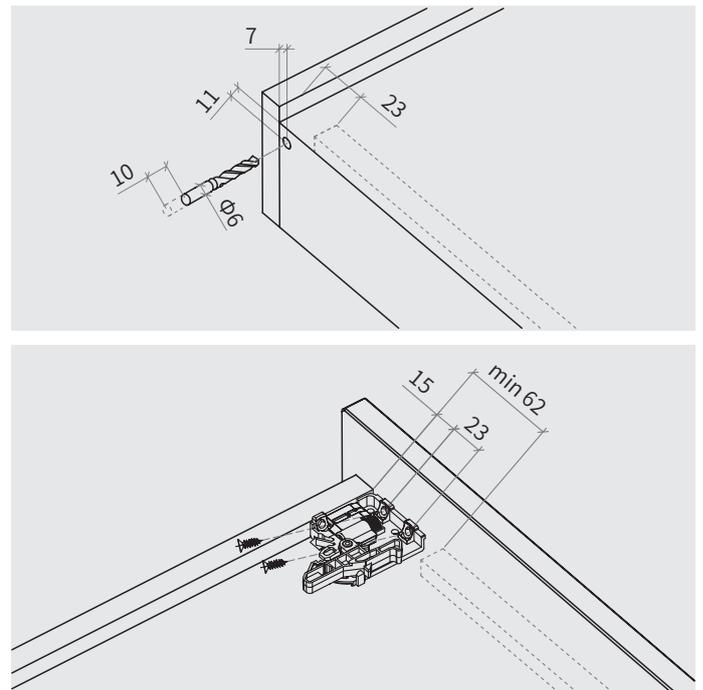

# MBJH-A

## 16mm & 19mm

系列两节阻尼隐藏滑轨配一维把手（减尺）  
SINGLE EXTENSION CONCEALED DRAWER SLIDES  
WITH 1D HANDLE (SHORTAGE SIZE)



半拉出



承重 25KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

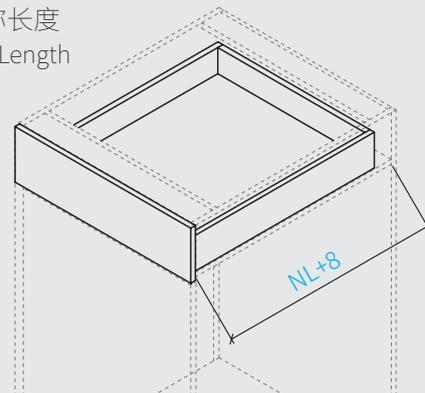

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳半拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth semi-pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information



两节阻尼隐藏滑轨（配一维把手）左 / 右

SINGLE EXTENSION CONCEALED DRAWER SLIDES  
(WITH 1D HANDLE) LEFT/RIGHT

25kg 阻尼滑轨 16mm		25kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MBJH - A (16) - 250	250 mm	MBJH - A (19) - 250
300 mm	MBJH - A (16) - 300	300 mm	MBJH - A (19) - 300
350 mm	MBJH - A (16) - 350	350 mm	MBJH - A (19) - 350
400 mm	MBJH - A (16) - 400	400 mm	MBJH - A (19) - 400
450 mm	MBJH - A (16) - 450	450 mm	MBJH - A (19) - 450
500 mm	MBJH - A (16) - 500	500 mm	MBJH - A (19) - 500



### 16mm 柜体安装所需空间 Space Requirement

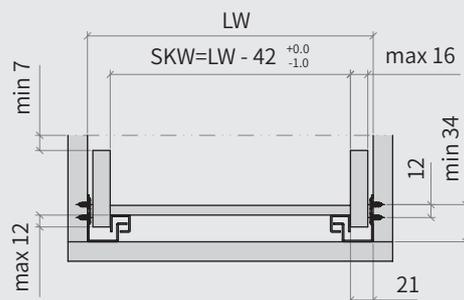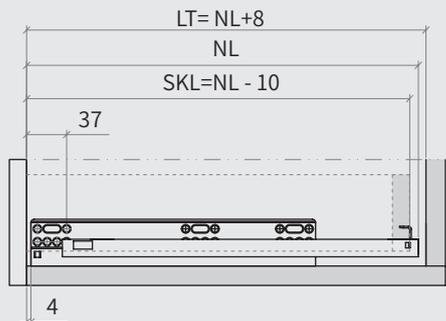

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

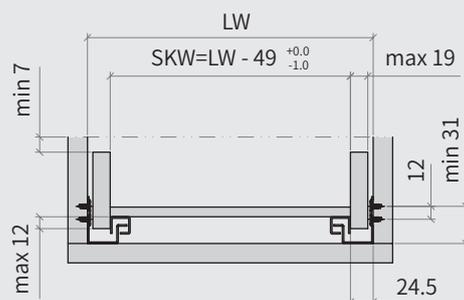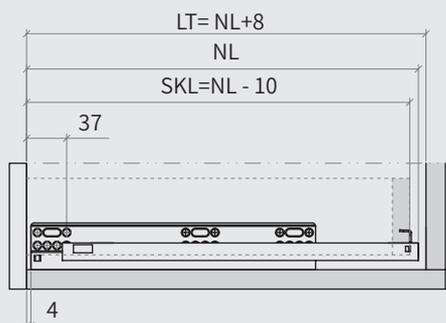

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

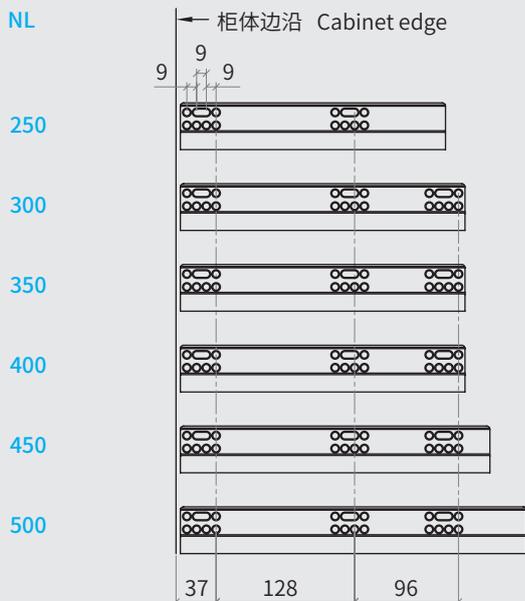

### 抽屉钻孔尺寸 (mm) drawer drill size

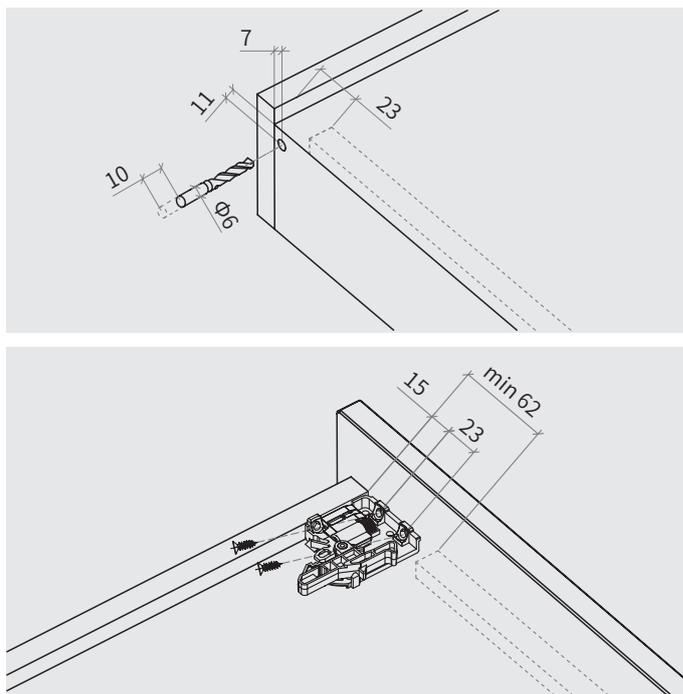



全拉出



承重 25KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

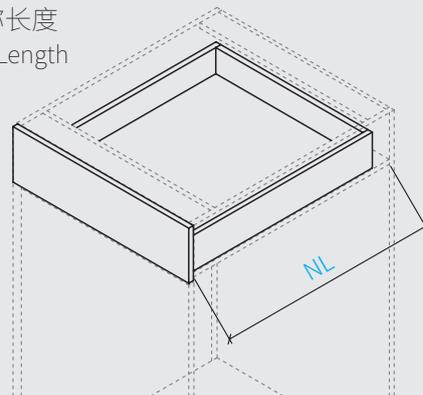

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information


两节阻尼隐藏滑轨 (配插销) 左 / 右

TWO SECTION FULL EXTENSION CONCEALED DRAWER SLIDES  
(WITH PIN) LEFT/RIGHT


25kg 阻尼滑轨 16mm		25kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	BTH - C (16) - 250	250 mm	BTH - C (19) - 250
300 mm	BTH - C (16) - 300	300 mm	BTH - C (19) - 300
350 mm	BTH - C (16) - 350	350 mm	BTH - C (19) - 350
400 mm	BTH - C (16) - 400	400 mm	BTH - C (19) - 400
450 mm	BTH - C (16) - 450	450 mm	BTH - C (19) - 450
500 mm	BTH - C (16) - 500	500 mm	BTH - C (19) - 500



### 16mm 柜体安装所需空间 Space Requirement

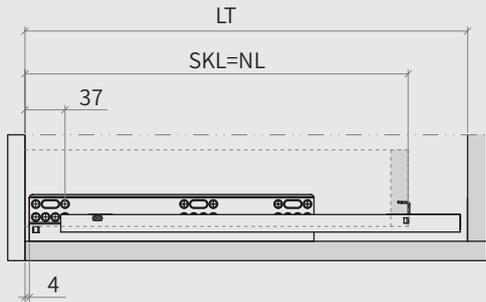


NL= 滑轨标称长度  
Nominal Slide Length  
LT= 柜体内部深度  
Cabinet Interior Depth

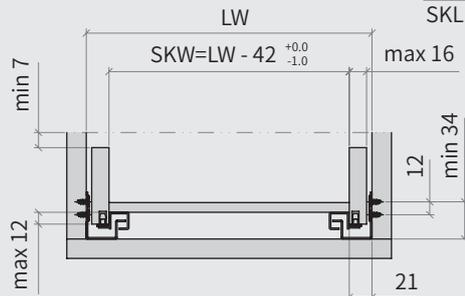


LW= 柜体内部宽度  
Cabinet Internal Width  
SKL= 抽屉长度  
Drawer Length  
SKW= 抽屉宽度  
Drawer Width

NL	250	300	350	400	450	500
LT	325	385	435	495	555	615
SKL	250	300	350	400	450	500

### 19mm 柜体安装所需空间 Space Requirement

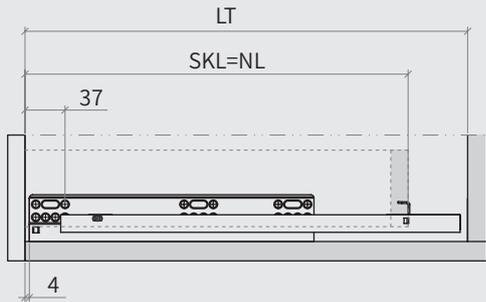


NL= 滑轨标称长度  
Nominal Slide Length  
LT= 柜体内部深度  
Cabinet Interior Depth

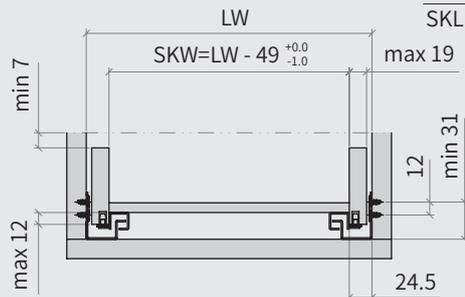



LW= 柜体内部宽度  
Cabinet Internal Width  
SKL= 抽屉长度  
Drawer Length  
SKW= 抽屉宽度  
Drawer Width

NL	250	300	350	400	450	500
LT	325	385	435	495	555	615
SKL	250	300	350	400	450	500

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

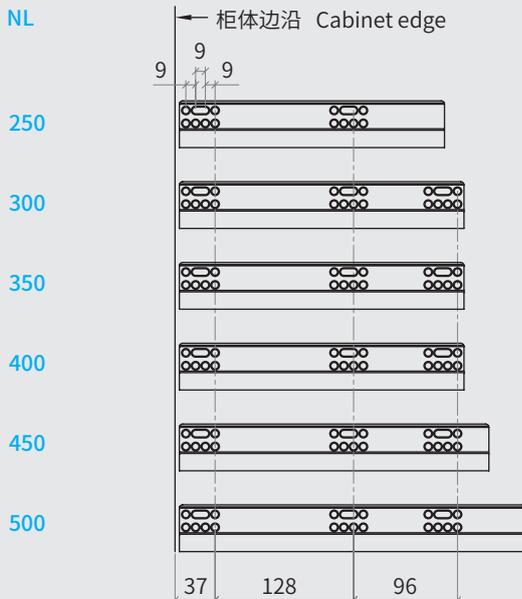

### 抽屉钻孔尺寸 (mm) drawer drill size

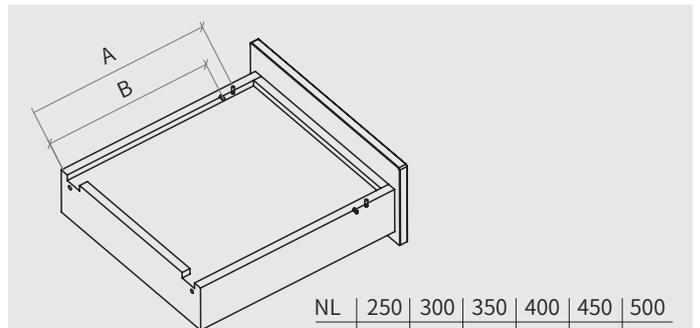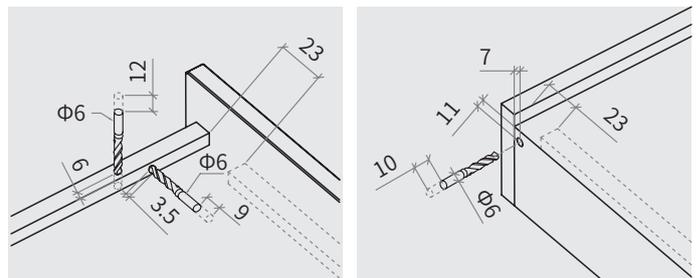

NL	250	300	350	400	450	500
A	205	255	305	355	405	455
B	185	235	285	335	385	435

# MBTH-C

## 16mm & 19mm

系列两节全拉出阻尼隐藏滑轨配插销 (减尺)  
TWO SECTION FULL EXTENSION CONCEALED DRAWER SLIDES  
WITH PIN (SHORTAGE SIZE)



全拉出



承重 25KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

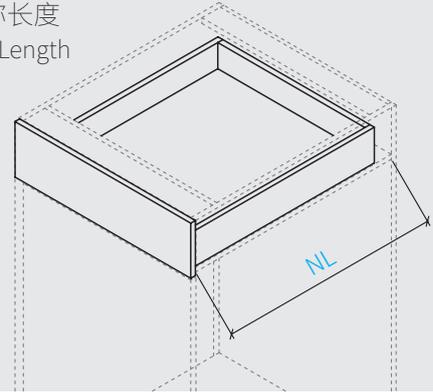

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information


两节阻尼隐藏滑轨 (配插销) 左 / 右

TWO SECTION FULL EXTENSION CONCEALED DRAWER SLIDES  
(WITH PIN) LEFT/RIGHT


25kg 阻尼滑轨 16mm		25kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MBTH - C (16) - 250	250 mm	MBTH - C (19) - 250
300 mm	MBTH - C (16) - 300	300 mm	MBTH - C (19) - 300
350 mm	MBTH - C (16) - 350	350 mm	MBTH - C (19) - 350
400 mm	MBTH - C (16) - 400	400 mm	MBTH - C (19) - 400
450 mm	MBTH - C (16) - 450	450 mm	MBTH - C (19) - 450
500 mm	MBTH - C (16) - 500	500 mm	MBTH - C (19) - 500



### 16mm 柜体安装所需空间 Space Requirement

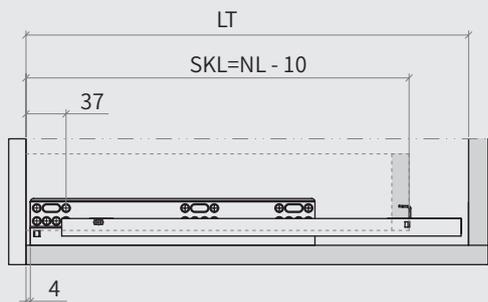



NL= 滑轨标称长度  
Nominal Slide Length  
LT= 柜体内部深度  
Cabinet Interior Depth

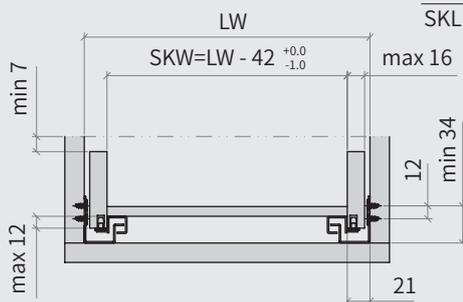

LW= 柜体内部宽度  
Cabinet Internal Width  
SKL= 抽屉长度  
Drawer Length  
SKW= 抽屉宽度  
Drawer Width


NL	250	300	350	400	450	500
LT	315	375	425	485	545	605
SKL	240	290	340	390	440	490

### 19mm 柜体安装所需空间 Space Requirement

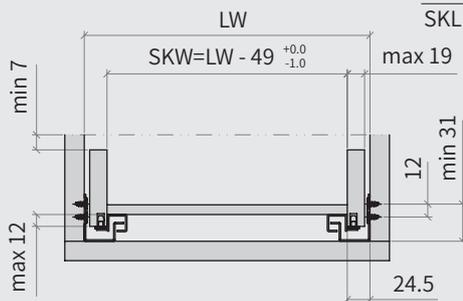
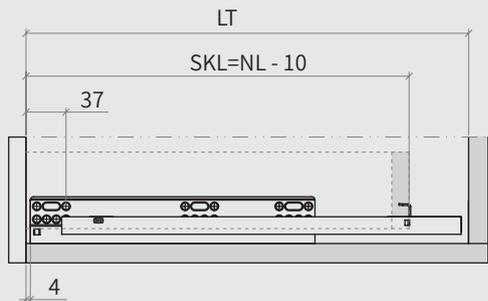


NL	250	300	350	400	450	500
LT	315	375	425	485	545	605
SKL	240	290	340	390	440	490

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

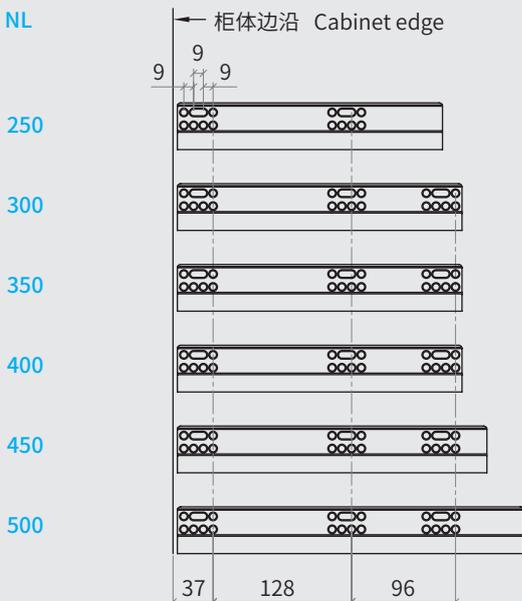

### 抽屉钻孔尺寸 (mm) drawer drill size

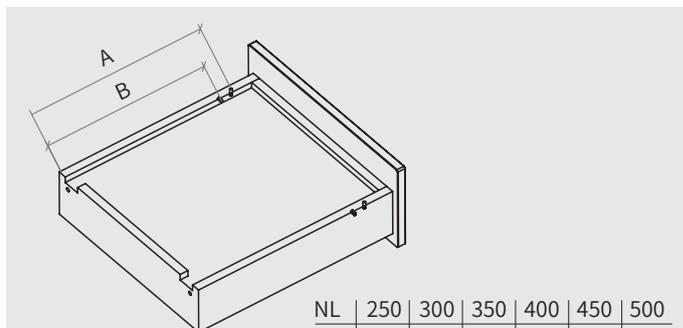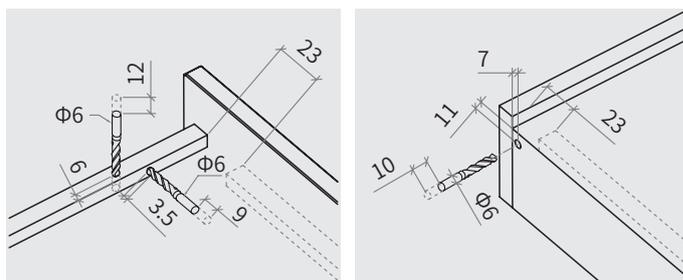

NL	250	300	350	400	450	500
A	220	245	270	305	330	355
B	188	213	238	273	298	323



全拉出



承重 25KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

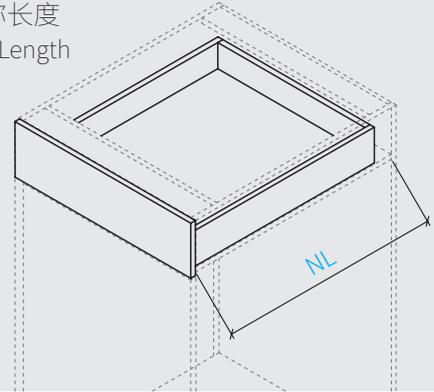

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information

两节阻尼隐藏滑轨 (配一维把手) 左 / 右


TWO SECTION FULL EXTENSION CONCEALED DRAWER SLIDES  
(WITH 1D HANDLE) LEFT/RIGHT

25kg 阻尼滑轨 16mm		25kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	BJH - C (16) - 250	250 mm	BJH - C (19) - 250
300 mm	BJH - C (16) - 300	300 mm	BJH - C (19) - 300
350 mm	BJH - C (16) - 350	350 mm	BJH - C (19) - 350
400 mm	BJH - C (16) - 400	400 mm	BJH - C (19) - 400
450 mm	BJH - C (16) - 450	450 mm	BJH - C (19) - 450
500 mm	BJH - C (16) - 500	500 mm	BJH - C (19) - 500




### 16mm 柜体安装所需空间 Space Requirement

NL	250	300	350	400	450	500
LT	325	385	435	495	555	615
SKL	250	300	350	400	450	500

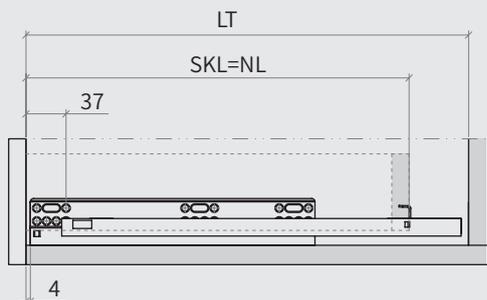



NL= 滑轨标称长度  
Nominal Slide Length  
LT= 柜体内部深度  
Cabinet Interior Depth

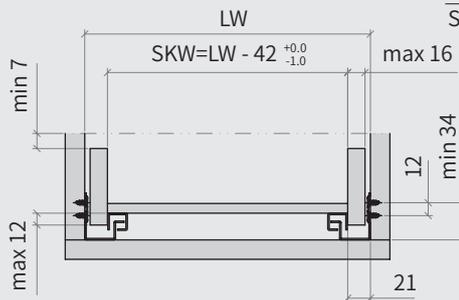


LW= 柜体内部宽度  
Cabinet Internal Width  
SKL= 抽屉长度  
Drawer Length  
SKW= 抽屉宽度  
Drawer Width

### 19mm 柜体安装所需空间 Space Requirement


NL	250	300	350	400	450	500
LT	325	385	435	495	555	615
SKL	250	300	350	400	450	500

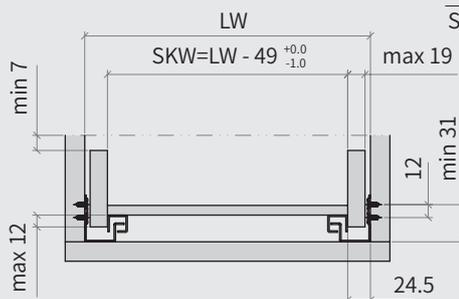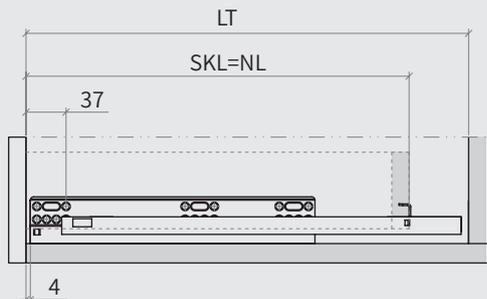

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

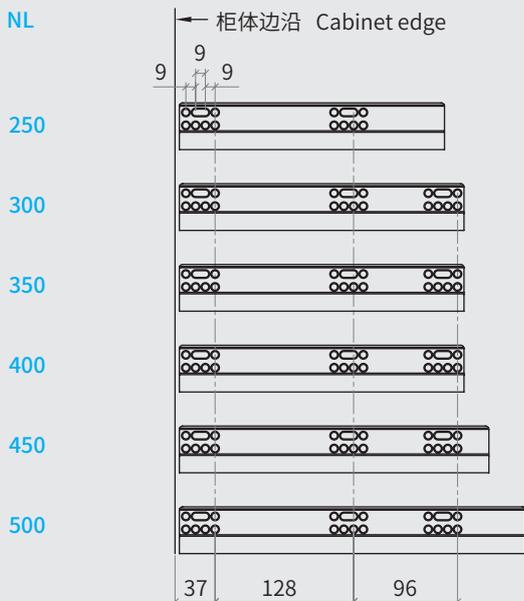

### 抽屉钻孔尺寸 (mm) drawer drill size

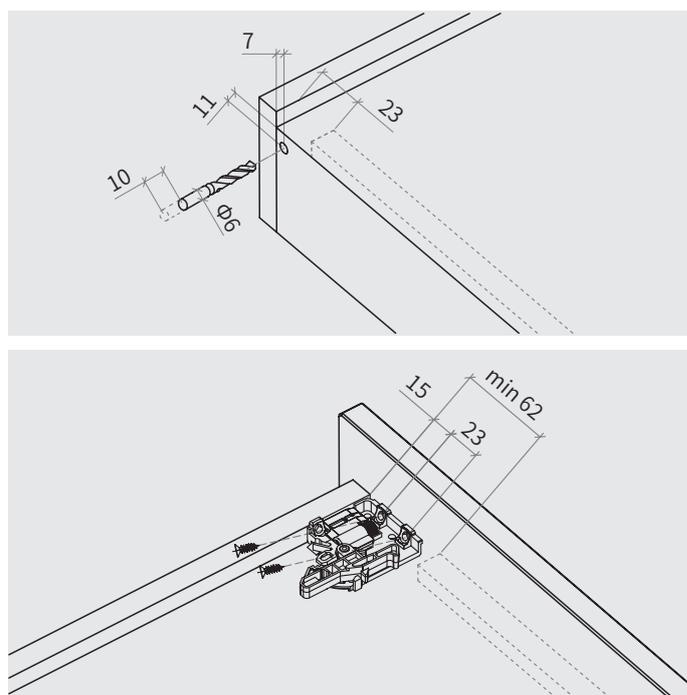

# MBJH-C

## 16mm & 19mm

系列两节全拉出阻尼隐藏滑轨配一维把手 (减尺)  
TWO SECTION FULL EXTENSION CONCEALED DRAWER SLIDES  
WITH 1D HANDLE (SHORTAGE SIZE)



全拉出



承重 25KG




缓冲技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

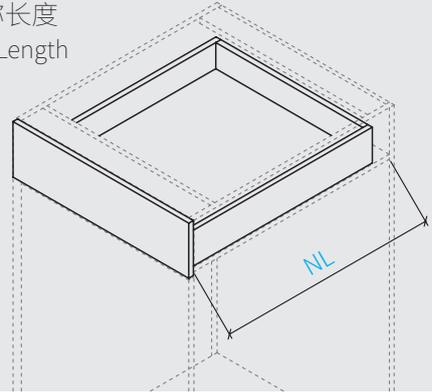

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳全拉出结构
- 精密塑性阻尼油管 + 旋簧设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth full pull-out structure
- Precision plastic damping tubing + coil spring design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information


两节阻尼隐藏滑轨 (配一维把手) 左 / 右

TWO SECTION FULL EXTENSION CONCEALED DRAWER SLIDES  
(WITH 1D HANDLE) LEFT/RIGHT

25kg 阻尼滑轨 16mm		25kg 阻尼滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MBJH - C (16) - 250	250 mm	MBJH - C (19) - 250
300 mm	MBJH - C (16) - 300	300 mm	MBJH - C (19) - 300
350 mm	MBJH - C (16) - 350	350 mm	MBJH - C (19) - 350
400 mm	MBJH - C (16) - 400	400 mm	MBJH - C (19) - 400
450 mm	MBJH - C (16) - 450	450 mm	MBJH - C (19) - 450
500 mm	MBJH - C (16) - 500	500 mm	MBJH - C (19) - 500




### 16mm 柜体安装所需空间 Space Requirement

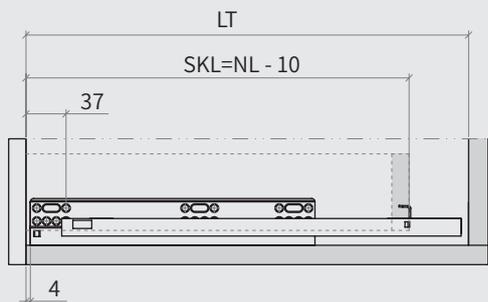

NL= 滑轨标称长度  
Nominal Slide Length

LT= 柜体内部深度  
Cabinet Interior Depth

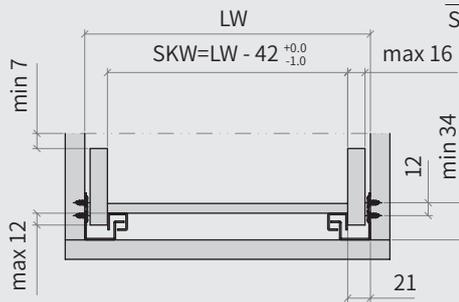


LW= 柜体内部宽度  
Cabinet Internal Width

SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


NL	250	300	350	400	450	500
LT	315	375	425	485	545	605
SKL	240	290	340	390	440	490

### 19mm 柜体安装所需空间 Space Requirement

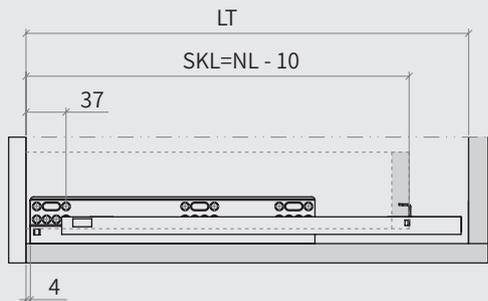

NL= 滑轨标称长度  
Nominal Slide Length

LT= 柜体内部深度  
Cabinet Interior Depth

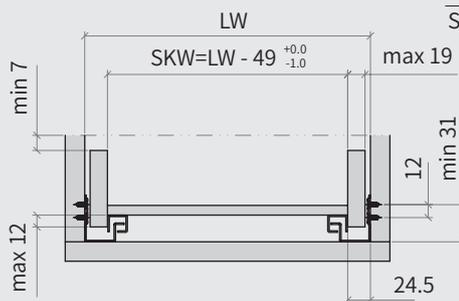


LW= 柜体内部宽度  
Cabinet Internal Width

SKL= 抽屉长度  
Drawer Length


SKW= 抽屉宽度  
Drawer Width

NL	250	300	350	400	450	500
LT	315	375	425	485	545	605
SKL	240	290	340	390	440	490

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

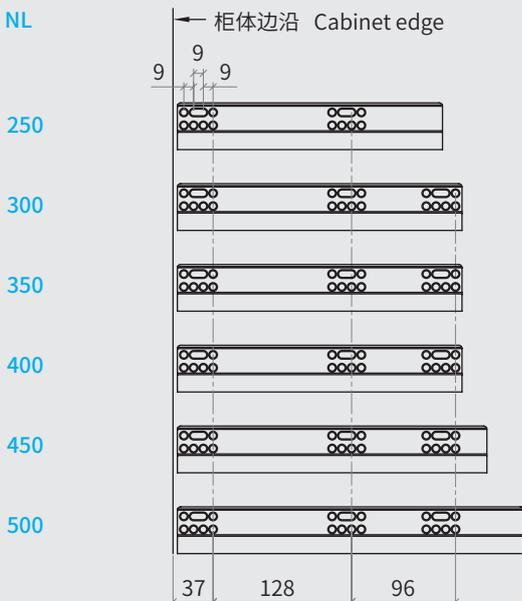

### 抽屉钻孔尺寸 (mm) drawer drill size

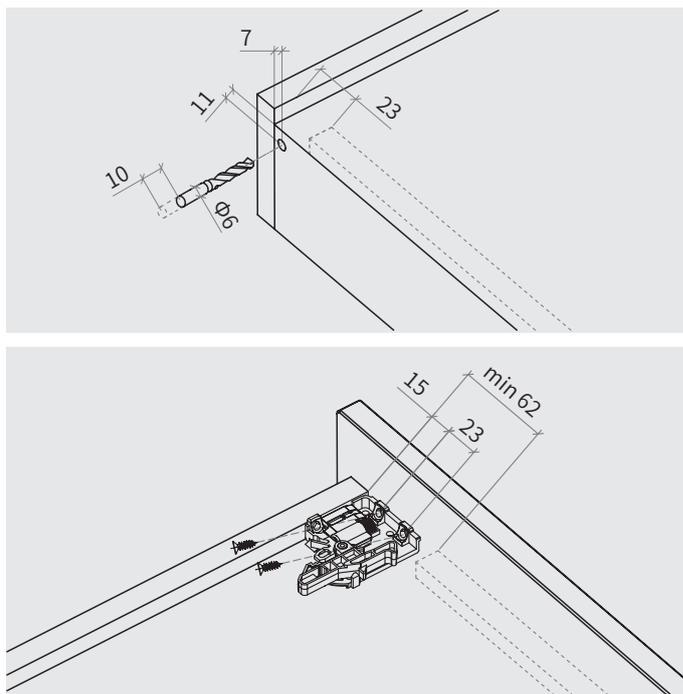

# SINGEL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES

## 二节普通反弹隐藏滑轨



HOUSEHOLD HARDWARE  
PRODUCT MANUAL





配插销



配一维把手

# BTR-A

## 16mm & 19mm

系列两节反弹隐藏滑轨配插销 (足尺)

SINGEL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES  
WITH PIN (FULL SIZE)



半拉出



承重 25KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

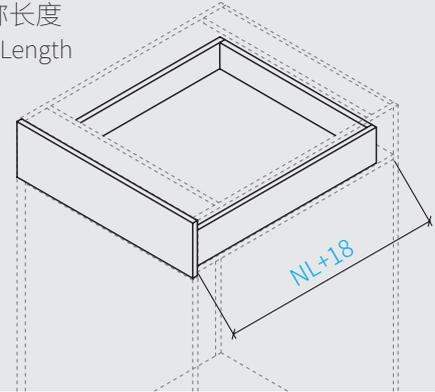

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳半拉出结构
- 精密反弹器可强拉设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth semi-pull-out structure
- Precision rebounder can be forced to pull design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information



两节反弹隐藏滑轨 (配插销) 左 / 右

SINGEL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES  
(WITH PIN) LEFT/RIGHT

25kg 反弹滑轨 16mm		25kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	BTR - A (16) - 250	250 mm	BTR - A (19) - 250
300 mm	BTR - A (16) - 300	300 mm	BTR - A (19) - 300
350 mm	BTR - A (16) - 350	350 mm	BTR - A (19) - 350
400 mm	BTR - A (16) - 400	400 mm	BTR - A (19) - 400
450 mm	BTR - A (16) - 450	450 mm	BTR - A (19) - 450
500 mm	BTR - A (16) - 500	500 mm	BTR - A (19) - 500



16mm 柜体安装所需空间 Space Requirement

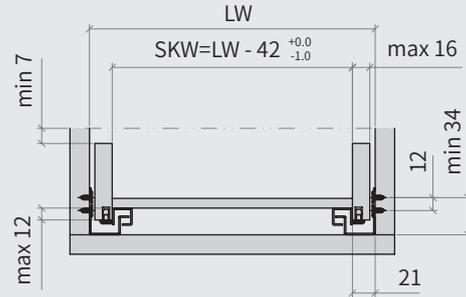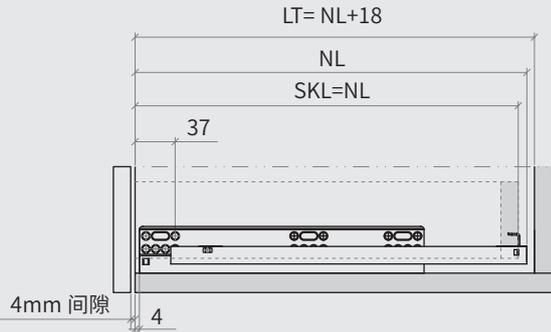

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



19mm 柜体安装所需空间 Space Requirement

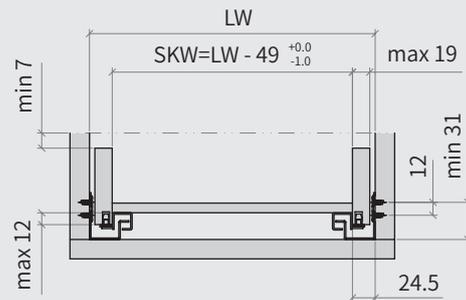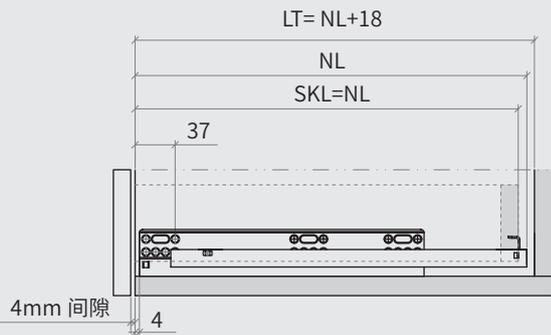

滑轨安装孔尺寸 (mm) Slide rail mounting hole size

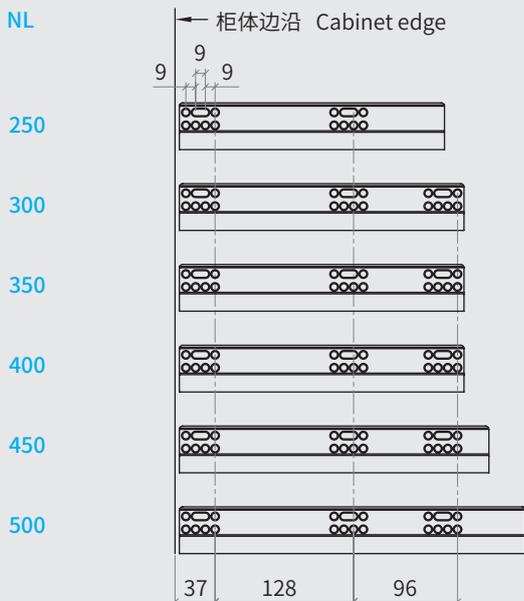

抽屉钻孔尺寸 (mm) drawer drill size

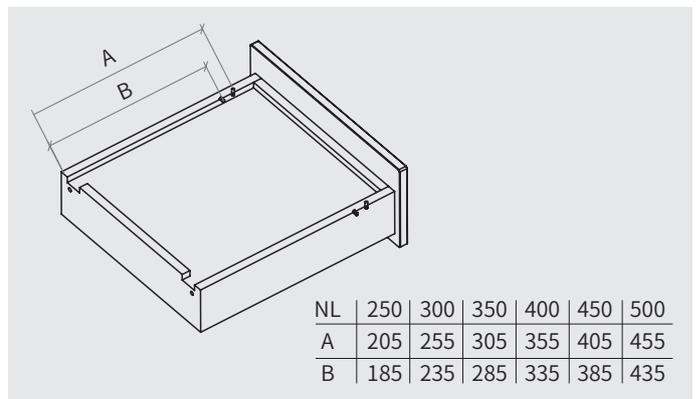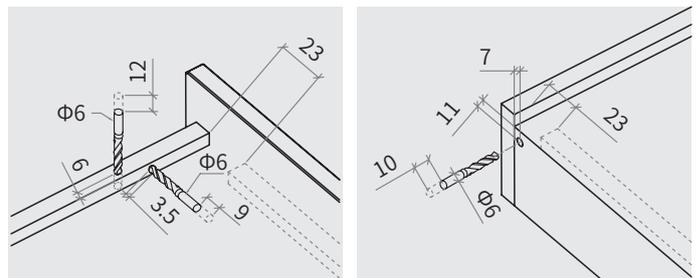

# MBTR-A

## 16mm & 19mm

系列两节反弹隐藏滑轨配插销 (减尺)

SINGEL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES WITH PIN (SHORTAG SIZE)



半拉出



承重 25KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

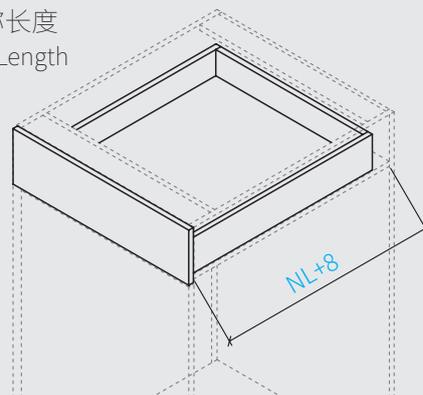

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳半拉出结构
- 精密反弹器可强拉设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth semi-pull-out structure
- Precision rebounder can be forced to pull design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information



两节反弹隐藏滑轨 (配插销) 左 / 右

SINGEL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES (WITH PIN) LEFT/RIGHT

25kg 反弹滑轨 16mm		25kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MBTR - A (16) - 250	250 mm	MBTR - A (19) - 250
300 mm	MBTR - A (16) - 300	300 mm	MBTR - A (19) - 300
350 mm	MBTR - A (16) - 350	350 mm	MBTR - A (19) - 350
400 mm	MBTR - A (16) - 400	400 mm	MBTR - A (19) - 400
450 mm	MBTR - A (16) - 450	450 mm	MBTR - A (19) - 450
500 mm	MBTR - A (16) - 500	500 mm	MBTR - A (19) - 500



### 16mm 柜体安装所需空间 Space Requirement

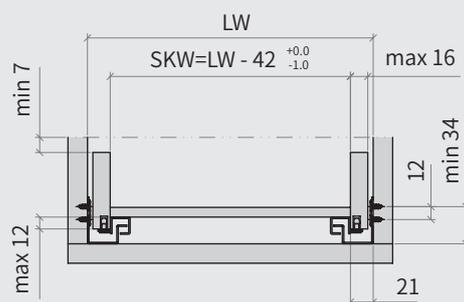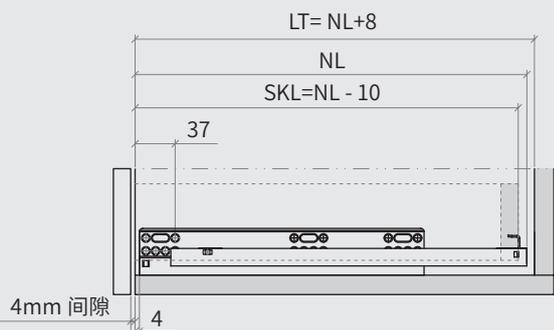

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width



### 19mm 柜体安装所需空间 Space Requirement

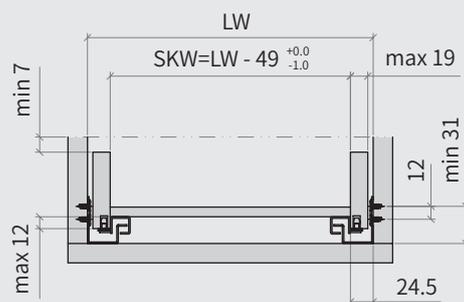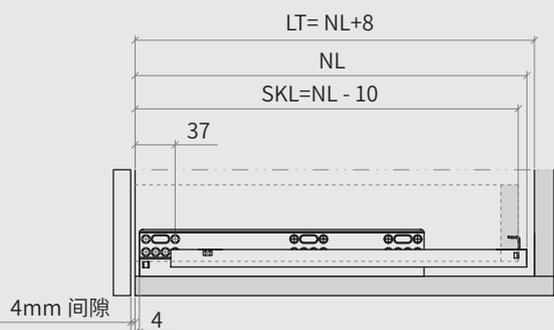

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

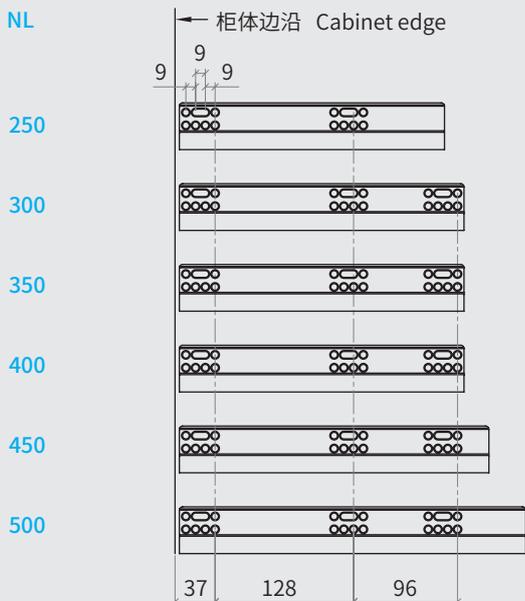

### 抽屉钻孔尺寸 (mm) drawer drill size

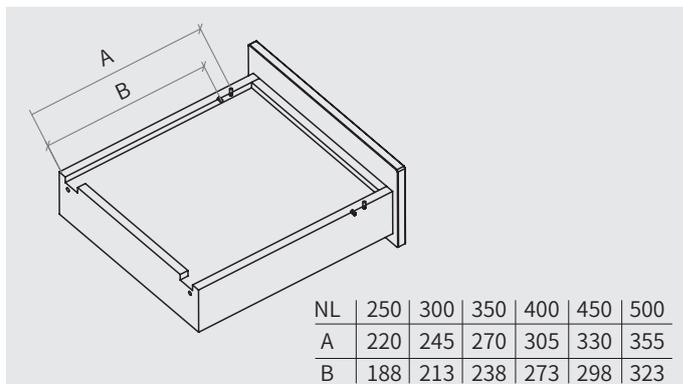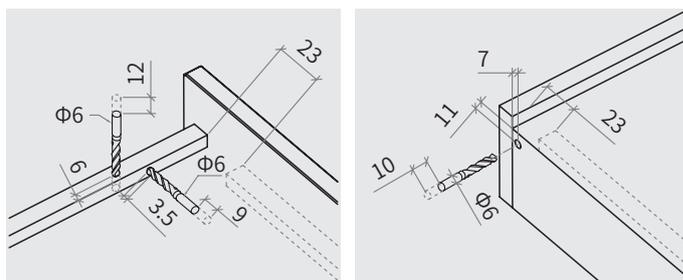

NL	250	300	350	400	450	500
A	220	245	270	305	330	355
B	188	213	238	273	298	323

# BJR-A

## 16mm & 19mm

系列两节反弹隐藏滑轨配一维把手（足尺）  
SINGEL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES  
WITH 1D HANDLE (FULL SIZE)



半拉出



承重 25KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

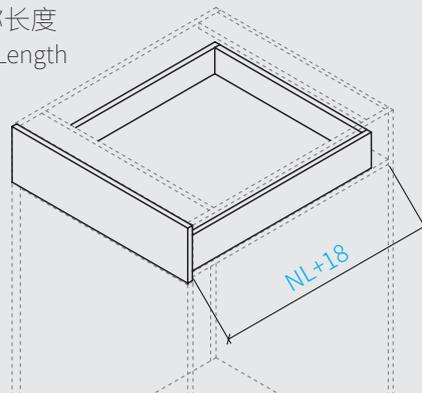

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳半拉出结构
- 精密反弹器可强拉设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth semi-pull-out structure
- Precision rebounder can be forced to pull design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information



两节反弹隐藏滑轨（配一维把手）左 / 右

SINGEL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES  
(WITH 1D HANDLE) LEFT/RIGHT

25kg 反弹滑轨 16mm		25kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	BJR - A (16) - 250	250 mm	BJR - A (19) - 250
300 mm	BJR - A (16) - 300	300 mm	BJR - A (19) - 300
350 mm	BJR - A (16) - 350	350 mm	BJR - A (19) - 350
400 mm	BJR - A (16) - 400	400 mm	BJR - A (19) - 400
450 mm	BJR - A (16) - 450	450 mm	BJR - A (19) - 450
500 mm	BJR - A (16) - 500	500 mm	BJR - A (19) - 500



### 16mm 柜体安装所需空间 Space Requirement

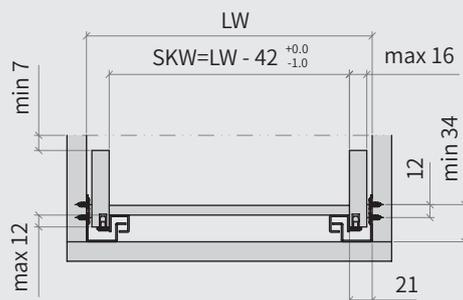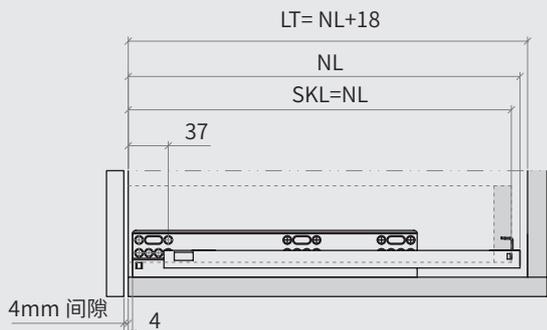

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

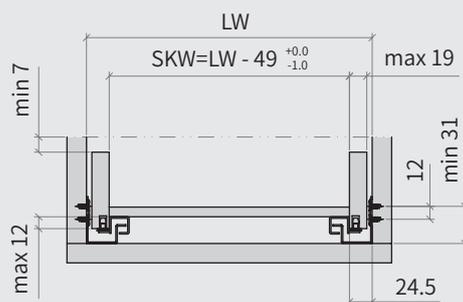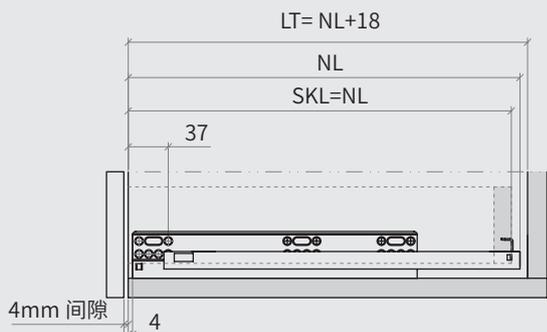

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

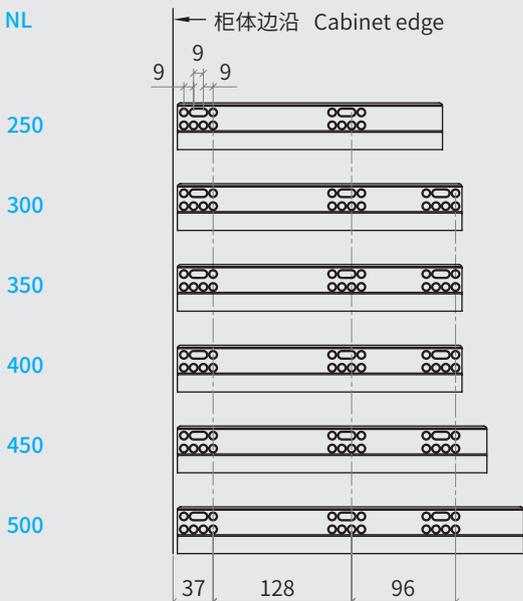

### 抽屉钻孔尺寸 (mm) drawer drill size

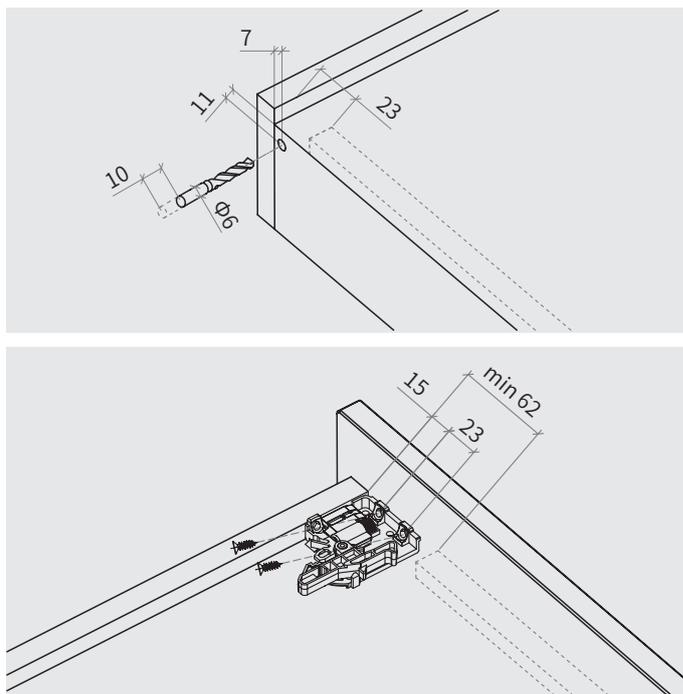

# MBJR-A

## 16mm & 19mm

系列两节反弹隐藏滑轨配一维把手 (减尺)  
SINGEL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES  
WITH 1D HANDLE ( SHORTAG SIZE)



半拉出



承重 25KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

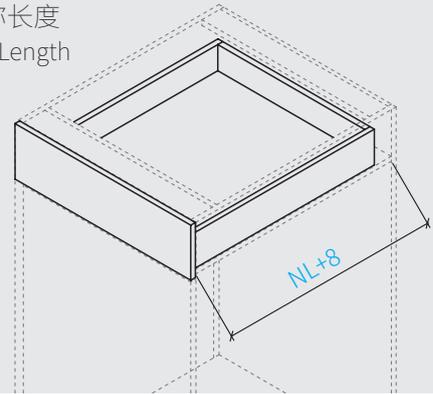

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳半拉出结构
- 精密反弹器可强拉设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth semi-pull-out structure
- Precision rebounder can be forced to pull design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information



两节反弹隐藏滑轨 (配一维把手) 左 / 右

SINGEL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES  
(WITH 1D HANDLE) LEFT/RIGHT

25kg 反弹滑轨 16mm		25kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MBJR - A (16) - 250	250 mm	MBJR - A (19) - 250
300 mm	MBJR - A (16) - 300	300 mm	MBJR - A (19) - 300
350 mm	MBJR - A (16) - 350	350 mm	MBJR - A (19) - 350
400 mm	MBJR - A (16) - 400	400 mm	MBJR - A (19) - 400
450 mm	MBJR - A (16) - 450	450 mm	MBJR - A (19) - 450
500 mm	MBJR - A (16) - 500	500 mm	MBJR - A (19) - 500



### 16mm 柜体安装所需空间 Space Requirement

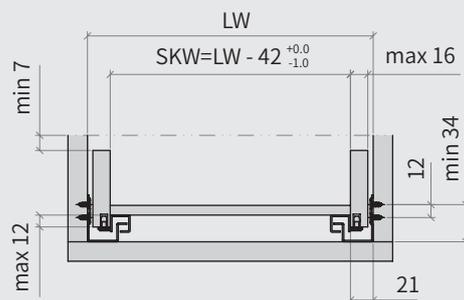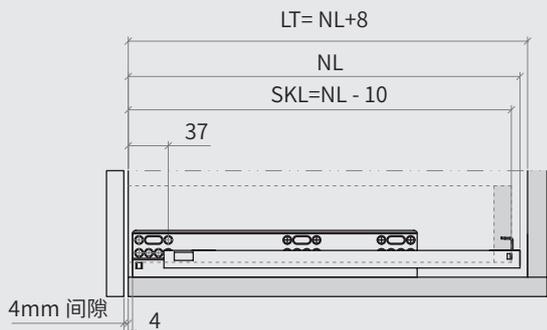

NL= 滑轨标称长度  
Nominal Slide Length



LT= 柜体内部深度  
Cabinet Interior Depth

LW= 柜体内部宽度  
Cabinet Internal Width


SKL= 抽屉长度  
Drawer Length

SKW= 抽屉宽度  
Drawer Width


### 19mm 柜体安装所需空间 Space Requirement

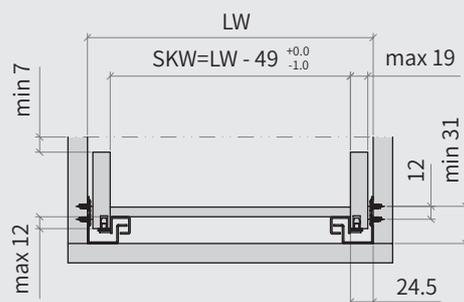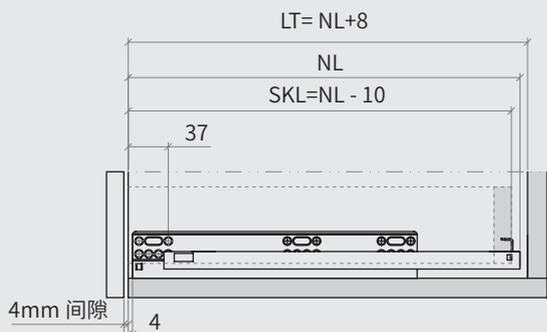

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

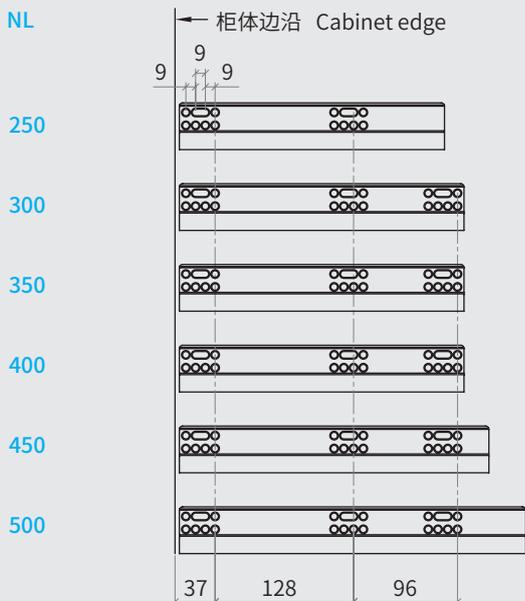

### 抽屉钻孔尺寸 (mm) drawer drill size

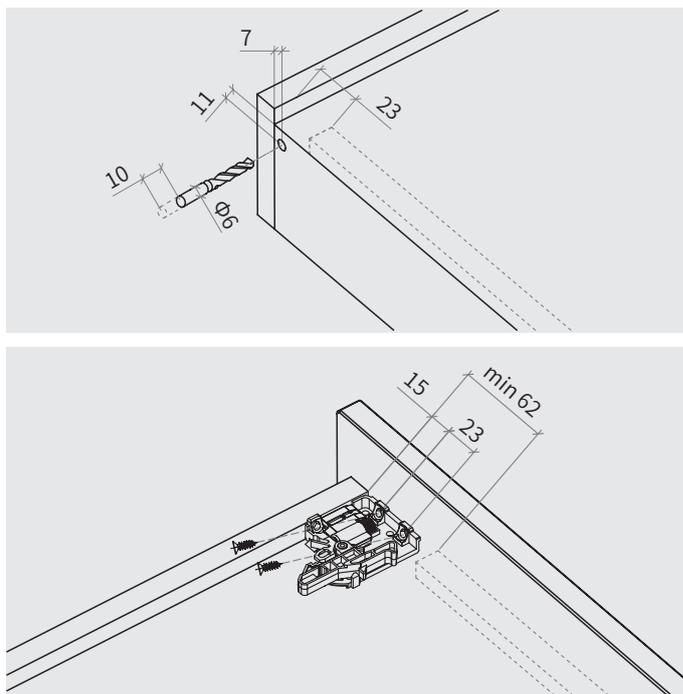

# BTR-C

## 16mm & 19mm

系列两节全拉出反弹隐藏滑轨配插销 (足尺)

TWO SECTION FULL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES WITH PIN (FULL SIZE)



全拉出



承重 25KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

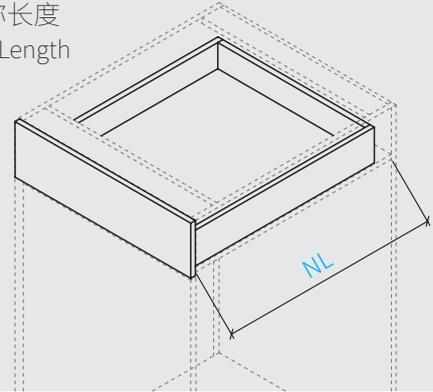

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳全拉出结构
- 精密反弹器可强拉设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth full pull-out structure
- Precision rebounder can be forced to pull design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information

两节全拉出反弹隐藏滑轨 (配插销) 左 / 右



TWO SECTION FULL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES (WITH PIN) LEFT/RIGHT

25kg 反弹滑轨 16mm		25kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	BTR - C (16) - 250	250 mm	BTR - C (19) - 250
300 mm	BTR - C (16) - 300	300 mm	BTR - C (19) - 300
350 mm	BTR - C (16) - 350	350 mm	BTR - C (19) - 350
400 mm	BTR - C (16) - 400	400 mm	BTR - C (19) - 400
450 mm	BTR - C (16) - 450	450 mm	BTR - C (19) - 450
500 mm	BTR - C (16) - 500	500 mm	BTR - C (19) - 500



### 16mm 柜体安装所需空间 Space Requirement

NL	250	300	350	400	450	500
LT	325	385	435	495	555	615
SKL	250	300	350	400	450	500

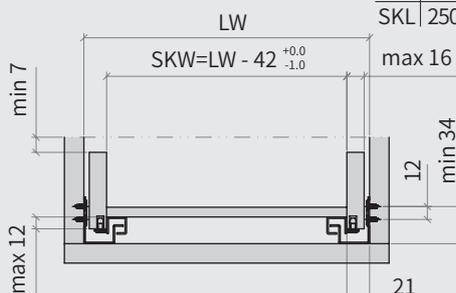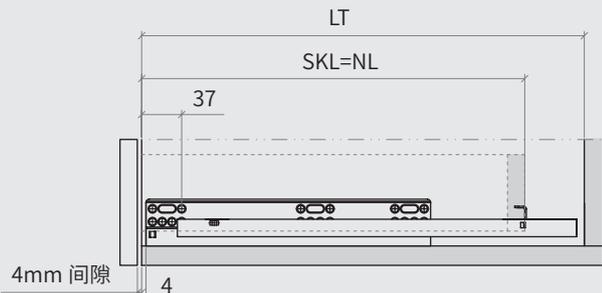

NL= 滑轨标称长度  
Nominal Slide Length

LT= 柜体内部深度  
Cabinet Interior Depth



LW= 柜体内部宽度  
Cabinet Internal Width

SKL= 抽屉长度  
Drawer Length


SKW= 抽屉宽度  
Drawer Width

### 19mm 柜体安装所需空间 Space Requirement



NL	250	300	350	400	450	500
LT	325	385	435	495	555	615
SKL	250	300	350	400	450	500

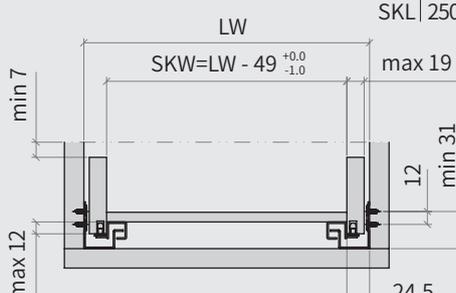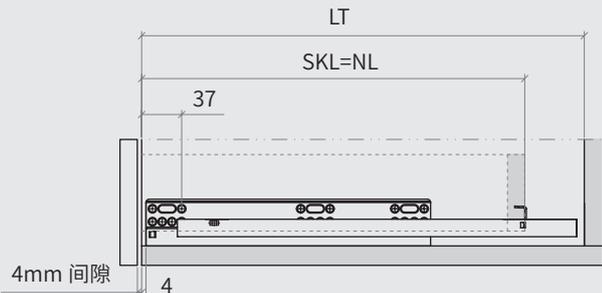

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

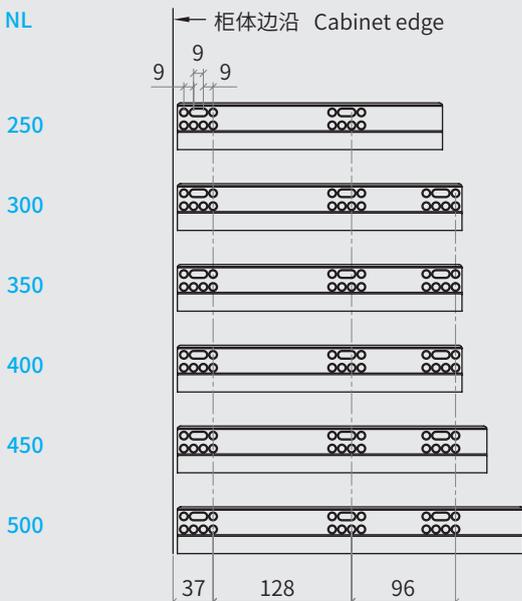

### 抽屉钻孔尺寸 (mm) drawer drill size

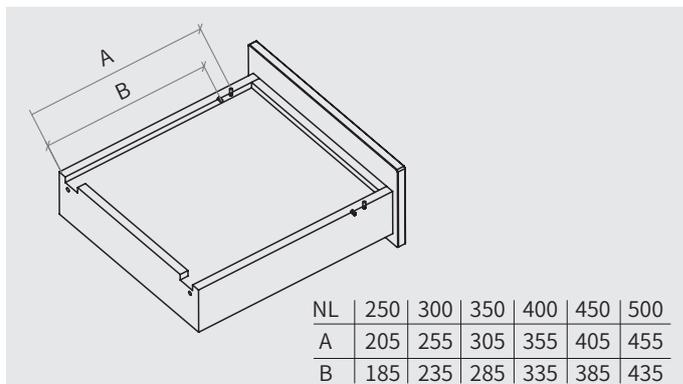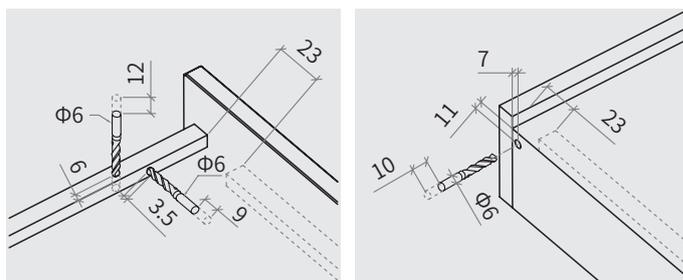

NL	250	300	350	400	450	500
A	205	255	305	355	405	455
B	185	235	285	335	385	435

# MBTR-C

## 16mm & 19mm

系列两节全拉出反弹隐藏滑轨配插销 (减尺)

TWO SECTION FULL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES WITH PIN (SHORTAG SIZE)



全拉出



承重 25KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

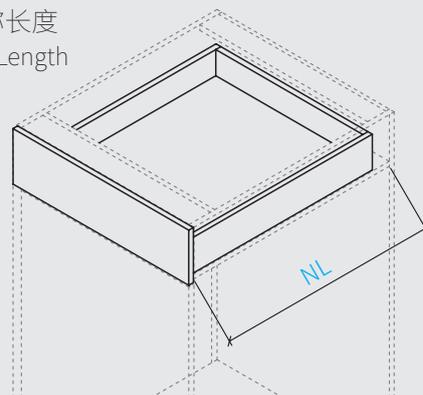

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳全拉出结构
- 精密反弹器可强拉设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth full pull-out structure
- Precision rebounder can be forced to pull design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information


两节全拉出反弹隐藏滑轨 (配插销) 左 / 右

TWO SECTION FULL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES (WITH PIN) LEFT/RIGHT


25kg 反弹滑轨 16mm		25kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MBTR - C (16) - 250	250 mm	MBTR - C (19) - 250
300 mm	MBTR - C (16) - 300	300 mm	MBTR - C (19) - 300
350 mm	MBTR - C (16) - 350	350 mm	MBTR - C (19) - 350
400 mm	MBTR - C (16) - 400	400 mm	MBTR - C (19) - 400
450 mm	MBTR - C (16) - 450	450 mm	MBTR - C (19) - 450
500 mm	MBTR - C (16) - 500	500 mm	MBTR - C (19) - 500




### 16mm 柜体安装所需空间 Space Requirement

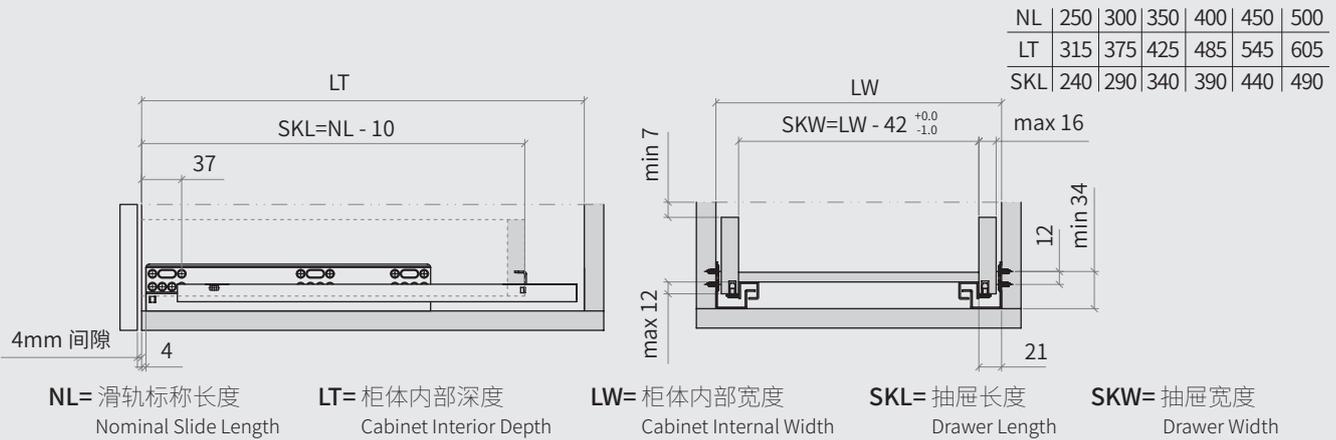



### 19mm 柜体安装所需空间 Space Requirement

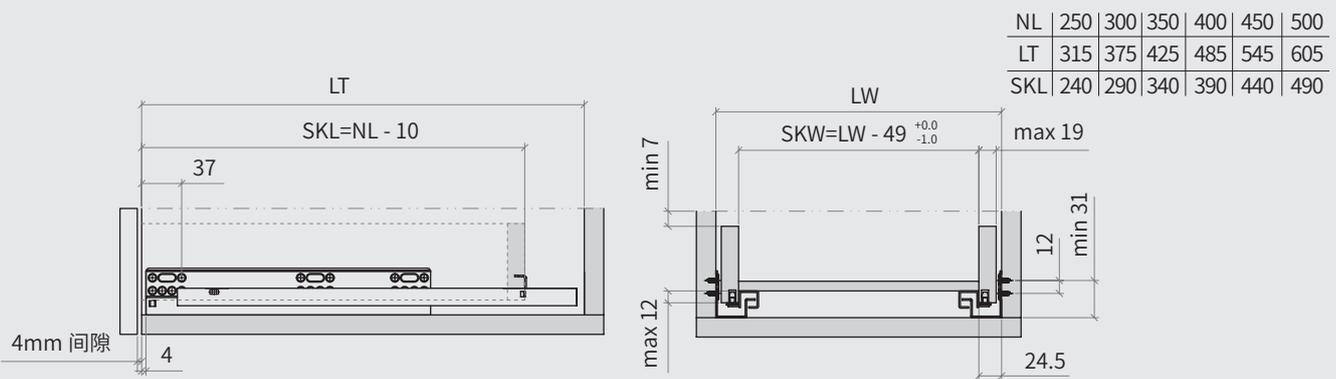

#### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

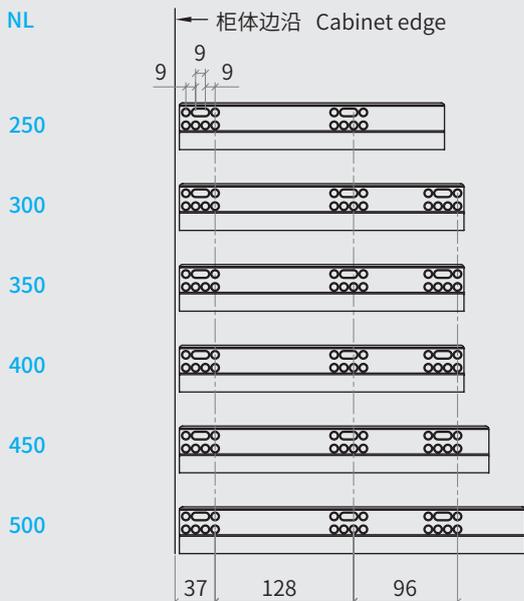

#### 抽屉钻孔尺寸 (mm) drawer drill size

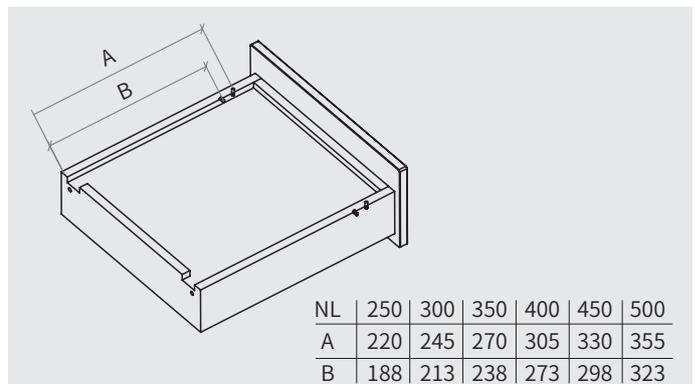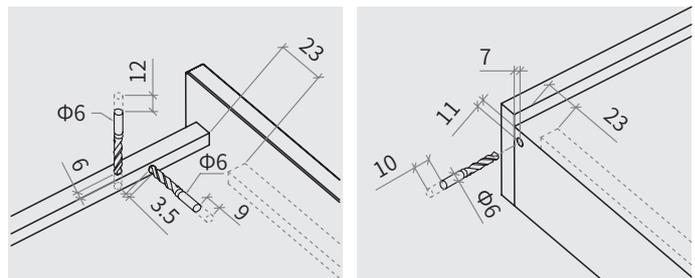



全拉出



承重 25KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

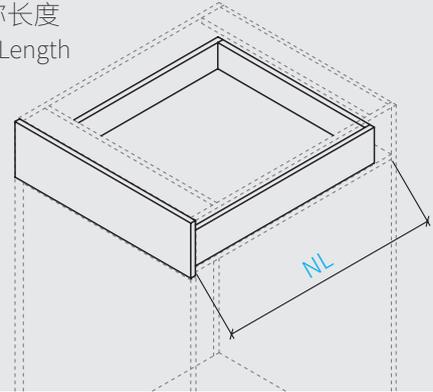

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳全拉出结构
- 精密反弹器可强拉设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth full pull-out structure
- Precision rebounder can be forced to pull design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information

两节全拉出反弹隐藏滑轨 (配一维把手) 左 / 右



TWO SECTION FULL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES (WITH 1D HANDLE) LEFT/RIGHT

25kg 反弹滑轨 16mm		25kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	BJR - C (16) - 250	250 mm	BJR - C (19) - 250
300 mm	BJR - C (16) - 300	300 mm	BJR - C (19) - 300
350 mm	BJR - C (16) - 350	350 mm	BJR - C (19) - 350
400 mm	BJR - C (16) - 400	400 mm	BJR - C (19) - 400
450 mm	BJR - C (16) - 450	450 mm	BJR - C (19) - 450
500 mm	BJR - C (16) - 500	500 mm	BJR - C (19) - 500



### 16mm 柜体安装所需空间 Space Requirement

NL	250	300	350	400	450	500
LT	325	385	435	495	555	615
SKL	250	300	350	400	450	500

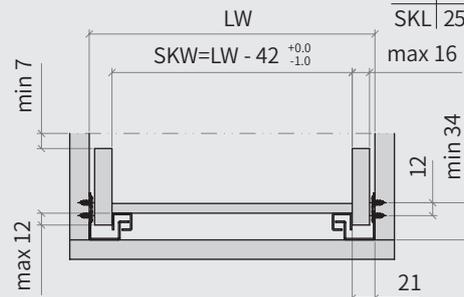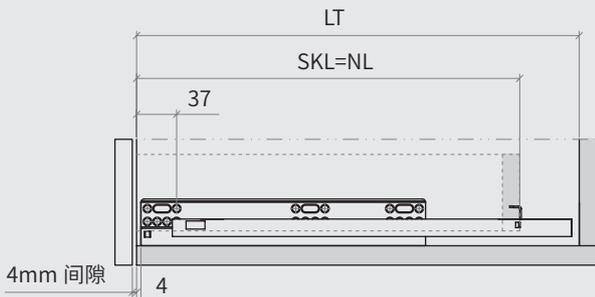

NL= 滑轨标称长度  
Nominal Slide Length

LT= 柜体内部深度  
Cabinet Interior Depth



LW= 柜体内部宽度  
Cabinet Internal Width

SKL= 抽屉长度  
Drawer Length


SKW= 抽屉宽度  
Drawer Width

### 19mm 柜体安装所需空间 Space Requirement


NL	250	300	350	400	450	500
LT	325	385	435	495	555	615
SKL	250	300	350	400	450	500

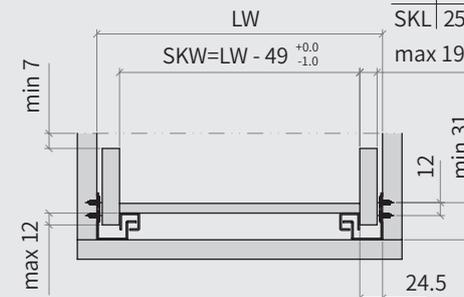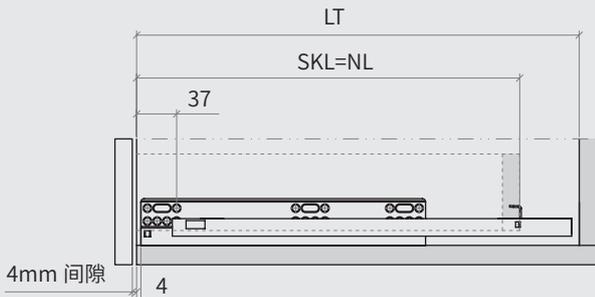

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

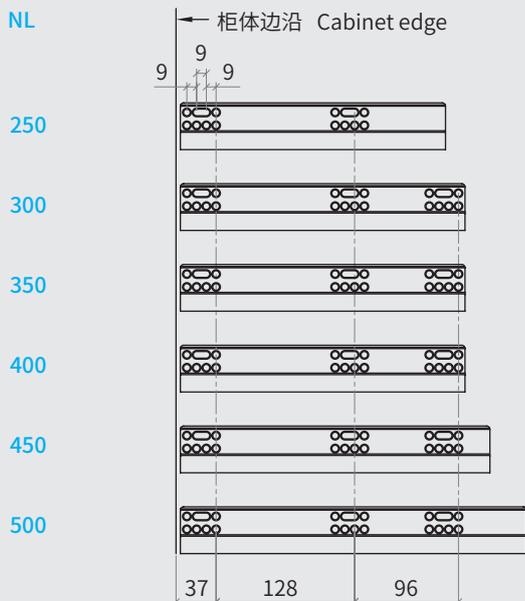

### 抽屉钻孔尺寸 (mm) drawer drill size

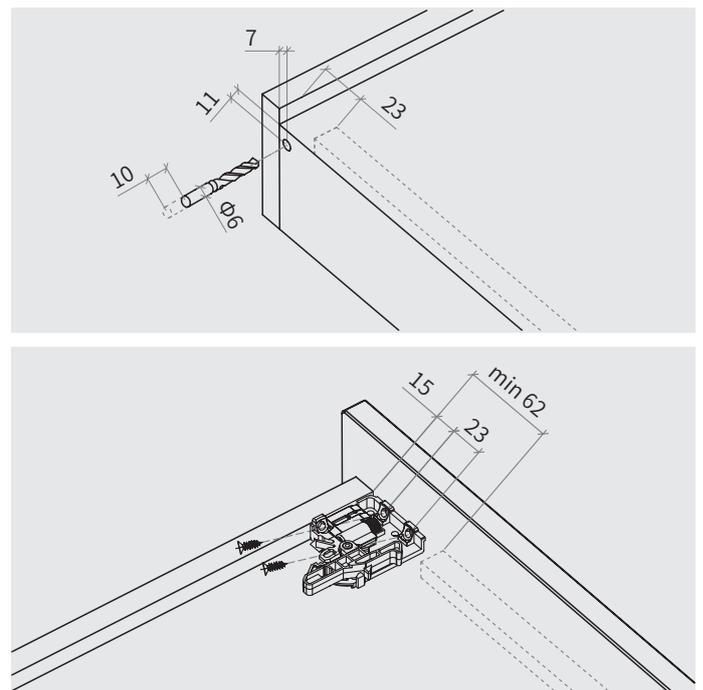

# MBJR-C

## 16mm & 19mm

系列两节全拉出反弹隐藏滑轨配一维把手 (减尺)  
TWO SECTION FULL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES WITH 1D HANDLE (SHORTAG SIZE)



全拉出



承重 25KG




反弹技术



### 所需空间 Space Requirement

NL= 标称长度  
Nominal Length

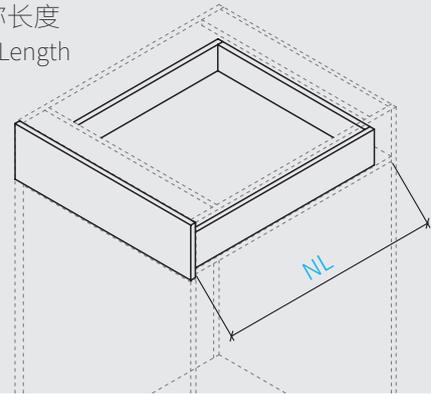

### 产品信息 Product Description

- 开启闭合全程顺滑静音
- 平稳全拉出结构
- 精密反弹器可强拉设计
- 负重 25KG、开合测试 3 万次以上
- Full synchronization, soft mute
- Smooth full pull-out structure
- Precision rebounder can be forced to pull design
- More than 30,000 opening and closing tests with a load of 25KG

### 订货信息 Ordering Information


两节全拉出反弹隐藏滑轨 (配一维把手) 左 / 右

TWO SECTION FULL EXTENSION PUSH OPEN CONCEALED DRAWER SLIDES (WITH 1D HANDLE) LEFT/RIGHT


25kg 反弹滑轨 16mm		25kg 反弹滑轨 19mm	
NL 标称长度 Nominal Length	订货编号 Item no.	NL 标称长度 Nominal Length	订货编号 Item no.
250 mm	MBJR - C (16) - 250	250 mm	MBJR - C (19) - 250
300 mm	MBJR - C (16) - 300	300 mm	MBJR - C (19) - 300
350 mm	MBJR - C (16) - 350	350 mm	MBJR - C (19) - 350
400 mm	MBJR - C (16) - 400	400 mm	MBJR - C (19) - 400
450 mm	MBJR - C (16) - 450	450 mm	MBJR - C (19) - 450
500 mm	MBJR - C (16) - 500	500 mm	MBJR - C (19) - 500




### 16mm 柜体安装所需空间 Space Requirement

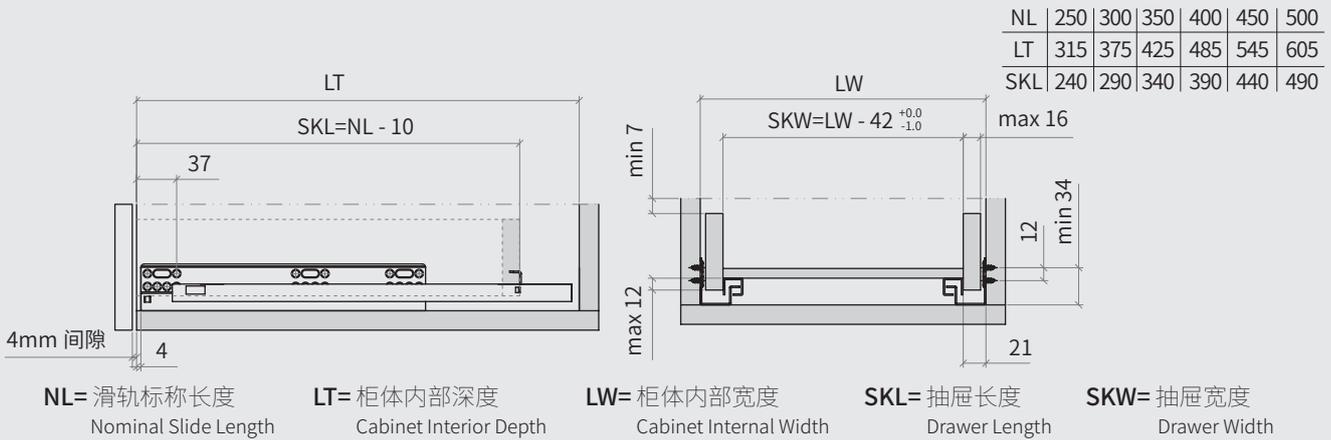


### 19mm 柜体安装所需空间 Space Requirement

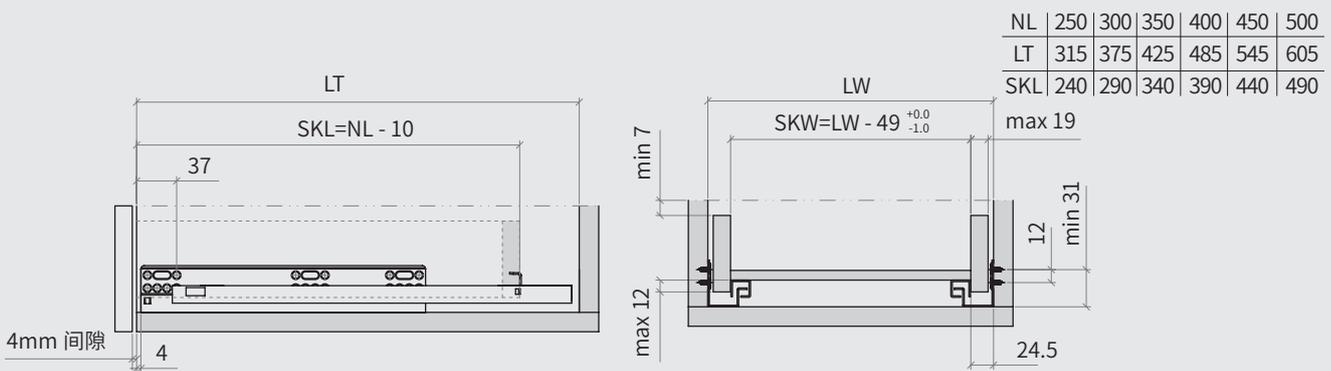

### 滑轨安装孔尺寸 (mm) Slide rail mounting hole size

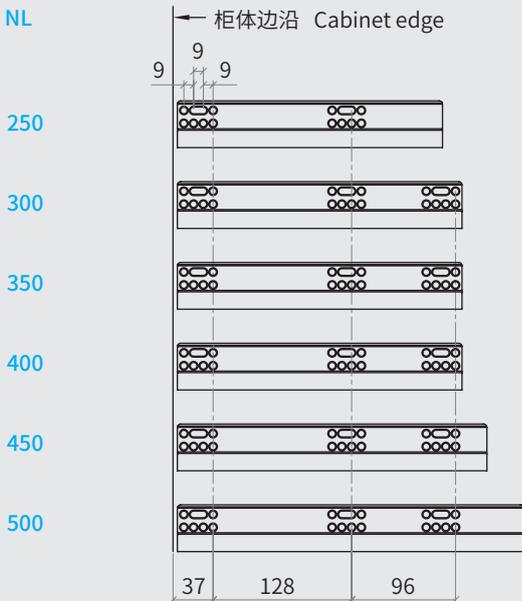

### 抽屉钻孔尺寸 (mm) drawer drill size

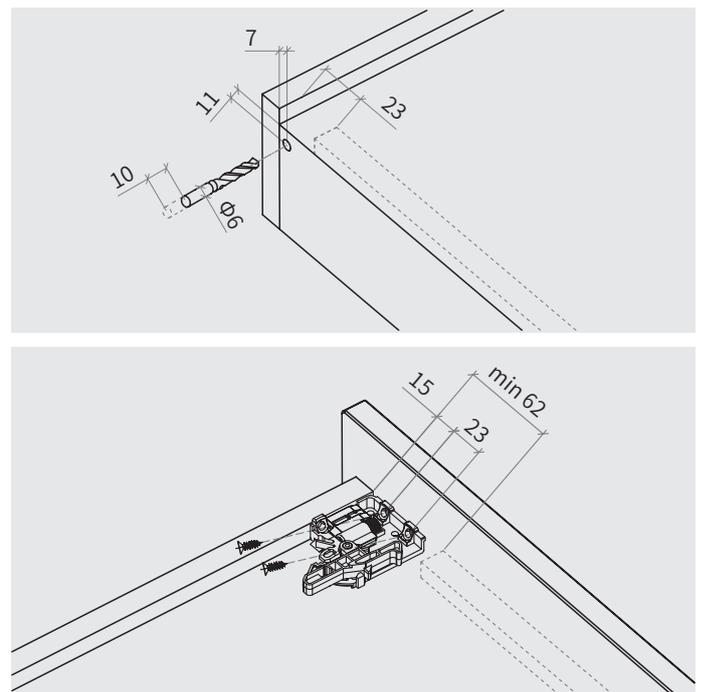



**广东家乐斯精密五金制造有限公司**

广东省佛山市顺德区勒流镇江村工业大道 14 号

电话：0757-22392889

手机：13928271963（冯生），13715486665（陈生）

